



查询EKIN2-150H供应商

捷多邦，专业PCB打样工厂，24小时加急出货

EKIN2-150H


M/A-COM

E-Series I/Q Modulator 149.95 MHz



Features


- High Carrier Suppression
- High 3I and 5I Suppression



SM-28 Package

Description

M/A-COM's EKIN2-150H is a passive, high performance surface mount Modulator. It is ideally suited for IF Modulation in Cellular Base Stations. Typical system applications include GSM, DCS1800, W-CDMA and PCS.

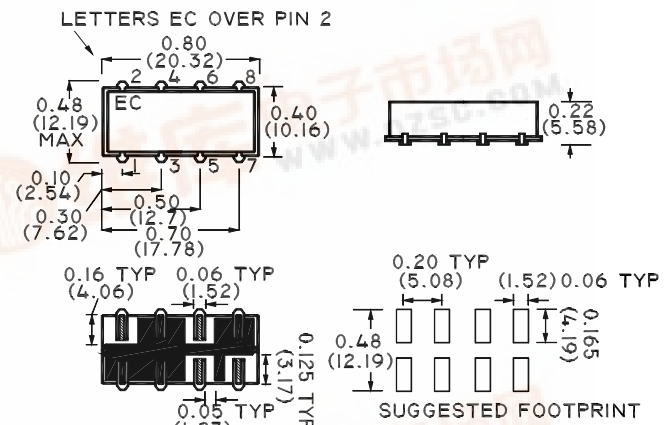

Electrical Specifications @25°C

Parameter			Units	Typical	Minimum	Maximum
Frequency Range	(LO) Carrier	149.95	MHz	—	—	—
	I/Q	DC - 0.63	MHz	—	—	—
(LO) Carrier Suppression *			dBc	35.0	30.0	—
SSB Rejection *			dBc	40.0	30.0	—
Harmonic Suppression *	3 x I/Q		dBc	52.0	45.0	—
	5 x I/Q		dBc	62.0	55.0	—
Conversion Loss			dB	5.0	—	6.5
(LO) Carrier Power			dBm	+17.0 ±2.0	—	—
I/Q Drive Level			—	-8.0	—	—
Conversion Loss Roll Off			dB	—	—	—
L.O. Carrier Feedthrough			dB	—	—	-40.0

* Note: When Q = +90 degrees relative to I; Lower sideband is suppressed. Related to wanted sideband power.

Please note that the photograph above indicates package only, not actual unit.

V2.00

S 0912 D

Connecting
at a
HIGHER
level.

Absolute Maximum Ratings

Parameter	Absolute Maximum
Operating Temperature	-10°C to +70°C
Storage Temperature	-55°C to +100°C
Pin Temperature (10 Sec)	260°C

Functional Configuration

Function	Pin No.
LO	1
RF	8
I	5
Q	6
External 50 Ohms	—
Case Ground	2,3,4,7
Not Connected	—

Typical Performance @ +25°C

