

ELM7Sxx, ELM7SxxB SERIES CMOS LOGIC IC

■ GENERAL DESCRIPTION

- ELM7Sxx, ELM7SxxB Series are CMOS ICs. They realize a high speed operation similar to LS-TTL with a lower power consumption by CMOS features. An inner circuit structure of 3-stages logic gates obtains wider noise immunity and constant output.
- ELM7S66, ELM7S66B are CMOS analog switches. They realize a high speed operation with a low power consumption by CMOS features. With a low on resistance and a high transmission rate, they realize a wider input voltage range.

■ FEATURES

- Very small SOT-25 (2.9 × 1.6 × 1.1mm) 5 - pin package
 SOT-26 (2.9 × 1.6 × 1.1mm) 6 - pin package
- Same electrical characteristics as 74HC Series
- Power voltage range : 2.0 ~ 6.0V
- Operation temp. range : -40 ~ +85°C
- | IOH | = IOL = 2mA (min)

■ SERIES

Function	NAND	AND	NOR	OR
Diagram (TOP VIEW)				
Product	ELM7S00 ELM7S00B	ELM7S08 ELM7S08B	ELM7S02 ELM7S02B	ELM7S32 ELM7S32B

Function	INV	UNB. INV	UNB. INV × 2	EX OR
Diagram (TOP VIEW)				
Product	ELM7S04 ELM7S04B	ELM7SU04 ELM7SU04B	ELM7SU04W ELM7SU04BW	ELM7S86 ELM7S86B

Function	ANALOG SW	SMT. INV
Diagram (TOP VIEW)		

ELM7Sxx, ELM7SxxB SERIES CMOS LOGIC

■ SELECTION GUIDE

Symbol			
a,b	Function	00	NAND
		08	AND
		02	NOR
		32	OR
		04	INV
		U04	UNB.INV
		86	EX OR
		66	Analog SW
		14	SMT. INV

ELM7Sxx : Sn/Pb

a b

ELM7SxxB : Pb-Free

a b

ELM7S00, ELM7S00B 2-input NAND Gate


■ DESCRIPTION

ELM7S00, ELM7S00B are CMOS 2-input NAND gate ICs. They realize a high speed operation similar to LS-TTL with a lower power consumption by CMOS features. An inner circuit structure of 3-stages logic gates obtains wider noise immunity and constant output.

■ FEATURES

- Package : SOT-25 package
- Same electrical characteristics as 74HC Series
- Power voltage range : 2.0 ~ 6.0V
- Operation temp. range : -40 ~ +85°C
- | IOH | = IOL = 2mA (min)


■ PIN CONFIGURATION



Pin No.	Pin Name
1	INB
2	INA
3	GND
4	OUTX
5	VCC

Input	Output
INA	INB
Low	Low
Low	High
High	Low
High	High

■ MARKING



No.	Mark	Contents
①	E	ELM7Sxx, ELM7SxxB series
②	1	ELM7S00, ELM7S00B
③	A~M (excepted I)	Lot No.

■ MAXIMUM ABSOLUTE RATINGS

Parameter	Symbol	Value	Units
Power Voltage	VCC	-0.5~+7.0	V
Input Voltage	VIN	-0.5~VCC+0.5	V
Output Voltage	VOUT	-0.5~VCC+0.5	V
Input Protection Diode Current	IIK	±20	mA
Output Parasitic Diode Current	IOK	±20	mA
Output Current	IOUT	±25	mA
VCC/GND Current	ICC, IGND	±25	mA
Power Dissipation	Pd	200	mW
Storage Temp.	Tstg	-65~+150	°C

CMOS LOGIC IC ELM7S00, ELM7S00B 2-input NAND Gate

■ SUGGESTED OPERATING CONDITION

Parameter	Symbol	Value			Units
Power Voltage	VCC	2.0~6.0			V
Input Voltage	VIN	0~VCC			V
Output Voltage	VOUT	0~VCC			V
Operating Temp.	Top	-40~+85			°C
High-input down-time	tr,tf	0~1000 (VCC=2.0V) 0~500 (VCC=4.5V) 0~400 (VCC=6.0V)			ns

■ DC ELECTRICAL CHARACTERISTICS

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions
			Min.	Typ.	Max.	Min.	Max.		
Input Voltage	VIH	2.0	1.5	—	—	1.5	—	V	
		4.5	3.15	—	—	3.15	—		
		6.0	4.2	—	—	4.2	—		
	VIL	2.0	—	—	0.5	—	0.5	V	
		4.5	—	—	1.35	—	1.35		
		6.0	—	—	1.8	—	1.8		
Output Voltage	VOH	2.0	1.9	2.0	—	1.9	—	V	VIN= VIH or VIL IOH = -20 μA IOH = -2mA IOH = -2.6mA
		4.5	4.4	4.5	—	4.4	—		
		6.0	5.9	6.0	—	5.9	—		
		4.5	4.18	4.36	—	4.13	—		
		6.0	5.68	5.84	—	5.63	—		
	VOL	2.0	—	0.0	0.1	—	0.1	V	VIN= VIH IOL = 20 μA IOL = 2mA IOL = 2.6mA
		4.5	—	0.0	0.1	—	0.1		
		6.0	—	0.0	0.1	—	0.1		
		4.5	—	0.11	0.26	—	0.33		
		6.0	—	0.13	0.26	—	0.33		
Input Current	IIN	6.0	-0.1	—	0.1	-1.0	1.0	μ A	VIN = VCC or GND
Static Current	ICC	6.0	—	—	1.0	—	10.0	μ A	VIN = VCC or GND

■ AC ELECTRICAL CHARACTERISTICS

(CL=15pF, tr=tf=6ns, VCC=5V)

Parameter	Sym.	Top = 25°C			Units	Conditions
		Min.	Typ.	Max.		
High Output Down-time	tTLH	—	4	10	ns	Refer to following test circuit
	tTHL	—	3	10		
Propagation Delay-time	tPLH	—	5	15	ns	Refer to following test circuit
	tPHL	—	5	15		


CMOS LOGIC IC ELM7S00, ELM7S00B 2-input NAND Gate

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions	
			Min.	Typ.	Max.	Min.	Max.			
			2.0	—	18	125	—	155		
High-Output Down-time	tTLH	4.5	—	7	25	—	31	ns	Refer to test circuit	
		6.0	—	6	21	—	26			
		2.0	—	14	125	—	155	ns		
	tTHL	4.5	—	6	25	—	31			
		6.0	—	6	21	—	26			
		2.0	—	16	100	—	125	ns	Refer to test circuit	
Propagation Delay-time	tPLH	4.5	—	8	20	—	25			
		6.0	—	7	17	—	21			
		2.0	—	16	100	—	125			
	tPHL	4.5	—	6	20	—	25			
		6.0	—	5	17	—	21			
Input Capacity	CIN	—	—	5	10	—	10	pF		
Equivalent Inner Capacity	CPD	—	—	10	—	—	—	pF		

* CPD is IC's inner equivalent capacity which is calculated from non-loaded operating current consumption referred to following test circuit. Averaged operating current consumption at non-load is calculated as following formula;


$$\text{ICC (opr)} = \text{CPD} \cdot \text{VCC} \cdot f_{IN} + \text{ICC}$$

■ TEST CIRCUIT

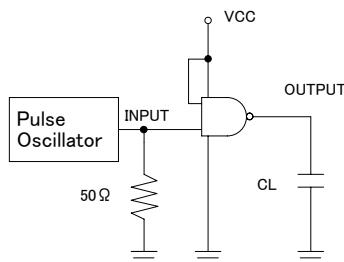

* Output should be opened when measuring current consumption.

■ MEASURED WAVE PATTERN

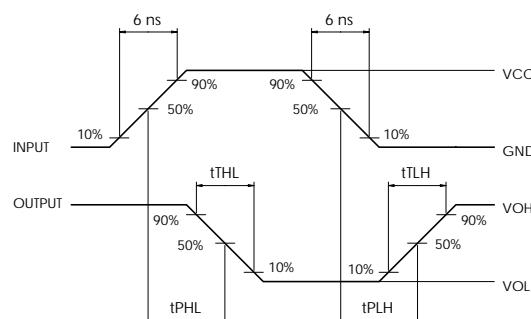

ELM7S08, ELM7S08B 2-input AND Gate


■ DESCRIPTION

ELM7S08, ELM7S08B are CMOS 2-input AND gate ICs. They realize a high speed operation similar to LS-TTL with a lower power consumption by CMOS features. An inner circuit structure of 3-stages logic gates obtains wider noise immunity and constant output.

■ FEATURES

- Package : SOT-25 package
- Same electrical characteristics as 74HC Series
- Power voltage range : 2.0 ~ 6.0V
- Operation temp. range : -40 ~ +85°C
- | IOH | = IOL = 2mA (min)


■ PIN CONFIGURATION



Pin No.	Pin Name
1	INB
2	INA
3	GND
4	OUTX
5	VCC

Input		Output
INA	INB	OUTX
Low	Low	Low
Low	High	Low
High	Low	Low
High	High	High

■ MARKING



No.	Mark	Contents
①	E	ELM7Sxx, ELM7Sxx series
②	2	ELM7S08, ELM7S08B
③	A~M (excepted I)	Lot No.

■ MAXIMUM ABSOLUTE RATINGS

Parameter	Symbol	Value	Units
Power Voltage	VCC	-0.5~+7.0	V
Input Voltage	VIN	-0.5~VCC+0.5	V
Output Voltage	VOUT	-0.5~VCC+0.5	V
Input Protection Diode Current	IIK	±20	mA
Output Parasitic Diode Current	IOK	±20	mA
Output Current	IOUT	±25	mA
VCC/GND Current	ICC, IGND	±25	mA
Power Dissipation	Pd	200	mW
Storage Temp.	Tstg	-65~+150	°C

CMOS LOGIC IC ELM7S08, ELM7S08B 2-input AND Gate

■ SUGGESTED OPERATING CONDITION

Parameter	Symbol	Value			Units
Power Voltage	VCC	2.0~6.0			V
Input Voltage	VIN	0~VCC			V
Output Voltage	VOUT	0~VCC			V
Operating Temp.	Top	-40~+85			°C
High-input down-time	tr,tf	0~1000 (VCC=2.0V) 0~500 (VCC=4.5V) 0~400 (VCC=6.0V)			ns

■ DC ELECTRICAL CHARACTERISTICS

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions
			Min.	Typ.	Max.	Min.	Max.		
Input Voltage	VIH	2.0	1.5	-	-	1.5	-	V	
		4.5	3.15	-	-	3.15	-		
		6.0	4.2	-	-	4.2	-		
	VIL	2.0	-	-	0.5	-	0.5	V	
		4.5	-	-	1.35	-	1.35		
		6.0	-	-	1.8	-	1.8		
Output Voltage	VOH	2.0	1.9	2.0	-	1.9	-	V	VIN= VIH IOH = -20 μA
		4.5	4.4	4.5	-	4.4	-		
		6.0	5.9	6.0	-	5.9	-		
		4.5	4.18	4.36	-	4.13	-		
		6.0	5.68	5.83	-	5.63	-		
	VOL	2.0	-	0.0	0.1	-	0.1	V	VIN= VIH or VIL IOL = 20 μ A IOL = 2mA IOL = 2.6mA
		4.5	-	0.0	0.1	-	0.1		
		6.0	-	0.0	0.1	-	0.1		
		4.5	-	0.12	0.26	-	0.33		
		6.0	-	0.13	0.26	-	0.33		
Input Current	IIN	6.0	-0.1	-	0.1	-1.0	1.0	μ A	VIN = VCC or GND
Static Current	ICC	6.0	-	-	1.0	-	10.0	μ A	VIN = VCC or GND

■ AC ELECTRICAL CHARACTERISTICS

(CL=15pF, tr=tf=6ns, VCC=5V)


Parameter	Sym.	Top = 25°C			Units	Conditions
		Min.	Typ.	Max.		
High Output Down-time	tTLH	-	4	10	ns	Refer to following test circuit
	tTHL	-	3	10		
Propagation Delay-time	tPLH	-	4	15	ns	Refer to following test circuit
	tPHL	-	5	15		

CMOS LOGIC IC ELM7S08, ELM7S08B 2-input AND Gate

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions	
			Min.	Typ.	Max.	Min.	Max.			
			2.0	-	21	125	-	155		
High-Output Down-time	tTLH	4.5	-	7	25	-	31	ns	Refer to test circuit	
		6.0	-	6	21	-	26			
		2.0	-	18	125	-	155	ns		
	tTHL	4.5	-	6	25	-	31			
		6.0	-	6	21	-	26			
		2.0	-	16	100	-	125	ns	Refer to test circuit	
Propagation Delay-time	tPLH	4.5	-	6	20	-	25			
		6.0	-	5	17	-	21			
		2.0	-	17	100	-	125			
	tPHL	4.5	-	8	20	-	25			
		6.0	-	7	17	-	21			
Input Capacity	CIN	-	-	5	10	-	10	pF		
Equivalent Inner Capacity	CPD	-	-	10	-	-	-	pF		


* CPD is IC's inner equivalent capacity which is calculated from non-loaded operating current consumption referred to following test circuit. Averaged operating current consumption at non-load is calculated as following formula;
 $ICC (\text{opr}) = CPD \cdot VCC \cdot f_{IN} + ICC$

TEST CIRCUIT

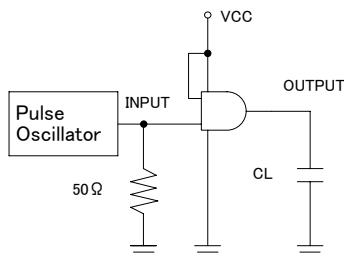

* Output should be opened when measuring current consumption.

MEASURED WAVE PATTERN

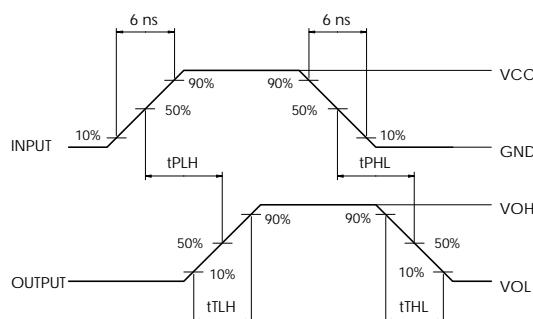

ELM7S02, ELM7S02B 2-input NOR Gate


■ DESCRIPTION

ELM7S02, ELM7S02B are CMOS 2-input NOR gate ICs. They realize a high speed operation similar to LS-TTL with a lower power consumption by CMOS features. An inner circuit structure of 3-stages logic gates obtains wider noise immunity and constant output.

■ FEATURES

- Package : SOT-25 package
- Same electrical characteristics as 74HC Series
- Power voltage range : 2.0 ~ 6.0V
- Operation temp. range : -40 ~ +85°C
- | IOH | = IOL = 2mA (min)


■ PIN CONFIGURATION



Pin No.	Pin Name
1	INB
2	INA
3	GND
4	OUTX
5	VCC

Input		Output
INA	INB	OUTX
Low	Low	High
Low	High	Low
High	Low	Low
High	High	Low

■ MARKING



No.	Mark	Contents
①	E	ELM7Sxx, ELM7SxxB series
②	3	ELM7S02, ELM7S02B
③	A~M (excepted I)	Lot No.

■ MAXIMUM ABSOLUTE RATINGS

Parameter	Symbol	Value	Units
Power Voltage	VCC	-0.5~+7.0	V
Input Voltage	VIN	-0.5~VCC+0.5	V
Output Voltage	VOUT	-0.5~VCC+0.5	V
Input Protection Diode Current	I _{IK}	±20	mA
Output Parasitic Diode Current	I _{OK}	±20	mA
Output Current	I _{O_{UT}}	±25	mA
VCC/GND Current	I _{CC} , I _{GND}	±25	mA
Power Dissipation	P _d	200	mW
Storage Temp.	T _{stg}	-65~+150	°C

CMOS LOGIC IC ELM7S02, ELM7S02B 2-input NOR Gate

■ SUGGESTED OPERATING CONDITION

Parameter	Symbol	Value			Units	
Power Voltage	VCC	2.0~6.0			V	
Input Voltage	VIN	0~VCC			V	
Output Voltage	VOUT	0~VCC			V	
Operating Temp.	Top	-40~+85			°C	
High-input down-time	tr,tf	0~1000 (VCC=2.0V)			ns	
		0~500 (VCC=4.5V)				
		0~400 (VCC=6.0V)				

■ DC ELECTRICAL CHARACTERISTICS

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions
			Min.	Typ.	Max.	Min.	Max.		
Input Voltage	VIH	2.0	1.5	-	-	1.5	-	V	
		4.5	3.15	-	-	3.15	-		
		6.0	4.2	-	-	4.2	-		
	VIL	2.0	-	-	0.5	-	0.5	V	
		4.5	-	-	1.35	-	1.35		
		6.0	-	-	1.8	-	1.8		
Output Voltage	VOH	2.0	1.9	2.0	-	1.9	-	V	VIN= VIL IOH = -20 μA
		4.5	4.4	4.5	-	4.4	-		
		6.0	5.9	6.0	-	5.9	-		
		4.5	4.18	4.35	-	4.13	-		
		6.0	5.68	5.83	-	5.63	-		
	VOL	2.0	-	0.0	0.1	-	0.1	V	VIN= VIH or VIL IOL = 20 μ A
		4.5	-	0.0	0.1	-	0.1		
		6.0	-	0.0	0.1	-	0.1		
		4.5	-	0.12	0.26	-	0.33		
		6.0	-	0.13	0.26	-	0.33		
Input Current	IIN	6.0	-0.1	-	0.1	-1.0	1.0	μ A	VIN = VCC or GND
Static Current	ICC	6.0	-	-	1.0	-	10.0	μ A	VIN = VCC or GND

■ AC ELECTRICAL CHARACTERISTICS

(CL=15pF, tr=tf=6ns, VCC=5V)

Parameter	Sym.	Top = 25°C			Units	Conditions
		Min.	Typ.	Max.		
High Output Down-time	tTLH	-	4	10	ns	Refer to following test circuit
	tTHL	-	3	10		
Propagation Delay-time	tPLH	-	5	15	ns	Refer to following test circuit
	tPHL	-	5	15		


CMOS LOGIC IC ELM7S02, ELM7S02B 2-input NOR Gate

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions	
			Min.	Typ.	Max.	Min.	Max.			
			2.0	—	21	125	—	155		
High-Output Down-time	tTLH	4.5	—	8	25	—	31	ns	Refer to test circuit	
		6.0	—	7	21	—	26			
		2.0	—	16	125	—	155	ns		
	tTHL	4.5	—	7	25	—	31			
		6.0	—	6	21	—	26			
		2.0	—	19	100	—	125	ns	Refer to test circuit	
Propagation Delay-time	tPLH	4.5	—	8	20	—	25			
		6.0	—	7	17	—	21			
		2.0	—	17	100	—	125			
	tPHL	4.5	—	7	20	—	25			
		6.0	—	6	17	—	21			
Input Capacity	CIN	—	—	5	10	—	10	pF		
Equivalent Inner Capacity	CPD	—	—	10	—	—	—	pF		

* CPD is IC's Inner equivalent capacity which is calculated from non-loaded operating current consumption referred to following test circuit. Averaged operating current consumption at non-load is calculated as following formula;


$$ICC (\text{opr}) = CPD \cdot VCC \cdot f_{IN} + ICC$$

■ TEST CIRCUIT

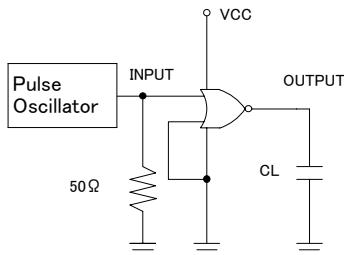

* Output should be opened when measuring current consumption.

■ MEASURED WAVE PATTERN

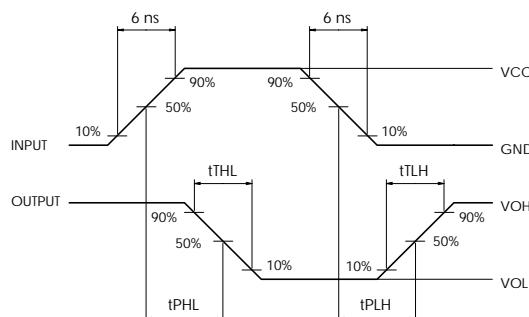

ELM7S32, ELM7S32B 2-input OR Gate


■ DESCRIPTION

ELM7S32, ELM7S32B are CMOS 2-input OR gate ICs. They realize a high speed operation similar to LS-TTL with a lower power consumption by CMOS features. An inner circuit structure of 3-stages logic gates obtains wider noise immunity and constant output.

■ FEATURES

- Package : SOT-25 package
- Same electrical characteristics as 74HC Series
- Power voltage range : 2.0 ~ 6.0V
- Operation temp. range : -40 ~ +85°C
- | IOH | = IOL = 2mA (min)


■ PIN CONFIGURATION



Pin No.	Pin Name
1	INB
2	INA
3	GND
4	OUTX
5	VCC

Input	Output
INA	INB
Low	Low
Low	High
High	Low
High	High

■ MARKING



No.	Mark	Contents
①	E	ELM7Sxx, ELM7SxxB series
②	4	ELM7S32, ELM7S32B
③	A~M (excepted I)	Lot No.

■ MAXIMUM ABSOLUTE RATINGS

Parameter	Symbol	Value	Units
Power Voltage	VCC	-0.5~+7.0	V
Input Voltage	VIN	-0.5~VCC+0.5	V
Output Voltage	VOUT	-0.5~VCC+0.5	V
Input Protection Diode Current	IIK	±20	mA
Output Parasitic Diode Current	IOK	±20	mA
Output Current	IOUT	±25	mA
VCC/GND Current	ICC, IGND	±25	mA
Power Dissipation	Pd	200	mW
Storage Temp.	Tstg	-65~+150	°C

CMOS LOGIC IC ELM7S32, ELM7S32B 2-input OR Gate

■ SUGGESTED OPERATING CONDITION

Parameter	Symbol	Value			Units	
Power Voltage	VCC	2.0~6.0			V	
Input Voltage	VIN	0~VCC			V	
Output Voltage	VOUT	0~VCC			V	
Operating Temp.	Top	-40~+85			°C	
High-input down-time	tr,tf	0~1000 (VCC=2.0V)			ns	
		0~500 (VCC=4.5V)				
		0~400 (VCC=6.0V)				

■ DC ELECTRICAL CHARACTERISTICS

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions
			Min.	Typ.	Max.	Min.	Max.		
Input Voltage	VIH	2.0	1.5	-	-	1.5	-	V	
		4.5	3.15	-	-	3.15	-		
		6.0	4.2	-	-	4.2	-		
	VIL	2.0	-	-	0.5	-	0.5	V	
		4.5	-	-	1.35	-	1.35		
		6.0	-	-	1.8	-	1.8		
Output Voltage	VOH	2.0	1.9	2.0	-	1.9	-	V	VIN=VIH or VIL IOH = -20 μA IOH = -2mA IOH = -2.6mA
		4.5	4.4	4.5	-	4.4	-		
		6.0	5.9	6.0	-	5.9	-		
		4.5	4.18	4.36	-	4.13	-		
		6.0	5.68	5.83	-	5.63	-		
	VOL	2.0	-	0.0	0.1	-	0.1	V	VIN=VIL IOL = 20 μA IOL = 2mA IOL = 2.6mA
		4.5	-	0.0	0.1	-	0.1		
		6.0	-	0.0	0.1	-	0.1		
		4.5	-	0.12	0.26	-	0.33		
		6.0	-	0.16	0.26	-	0.33		
Input Current	IIN	6.0	-0.1	-	0.1	-1.0	1.0	μ A	VIN = VCC or GND
Static Current	ICC	6.0	-	-	1.0	-	10.0	μ A	VIN = VCC or GND

■ AC ELECTRICAL CHARACTERISTICS

(CL=15pF, tr=tf=6ns, VCC=5V)


Parameter	Sym.	Top = 25°C			Units	Conditions
		Min.	Typ.	Max.		
High Output Down-time	tTLH	-	4	10	ns	Refer to following test circuit
	tTHL	-	4	10		
Propagation Delay-time	tPLH	-	5	15	ns	Refer to following test circuit
	tPHL	-	5	15		

CMOS LOGIC IC ELM7S32, ELM7S32B 2-input OR Gate

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions	
			Min.	Typ.	Max.	Min.	Max.			
High-Output Down-time	tTLH	2.0	—	22	125	—	155	ns	Refer to test circuit	
		4.5	—	7	25	—	31			
		6.0	—	6	21	—	26			
	tTHL	2.0	—	18	125	—	155	ns		
		4.5	—	6	25	—	31			
		6.0	—	6	21	—	26			
Propagation Delay-time	tPLH	2.0	—	17	100	—	125	ns	Refer to test circuit	
		4.5	—	7	20	—	25			
		6.0	—	6	17	—	21			
	tPHL	2.0	—	18	100	—	125	ns		
		4.5	—	8	20	—	25			
		6.0	—	7	17	—	21			
Input Capacity	CIN	—	—	5	10	—	10	pF		
Equivalent Inner Capacity	CPD	—	—	10	—	—	—	pF		


* CPD is IC's inner equivalent capacity which is calculated from non-loaded operating current consumption referred to following test circuit. Averaged operating current consumption at non-load is calculated as following formula;
 $ICC (\text{opr}) = CPD \cdot VCC \cdot f_{IN} + ICC$

■ TEST CIRCUIT

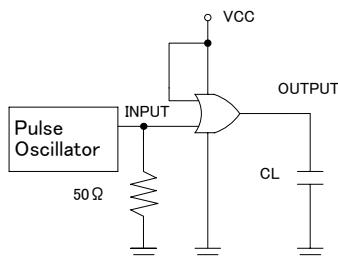

* Output should be opened when measuring current consumption.

■ MEASURED WAVE PATTERN

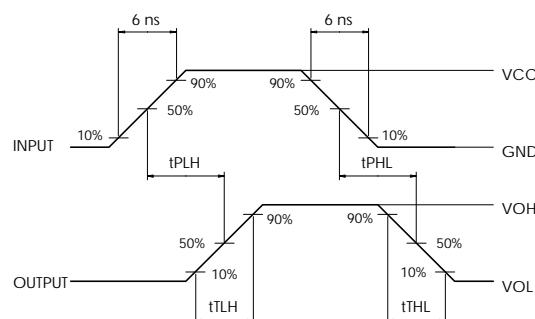

ELM7S04, ELM7S04B Inverter


■ DESCRIPTION

ELM7S04, ELM7S04B are CMOS inverter ICs. They realize a high speed operation similar to LS-TTL with a lower power consumption by CMOS features. An inner circuit structure of 3-stages logic gates obtains a wider noise immunity and a constant output.

■ FEATURES

- Package : SOT-25 package
- Same electrical characteristics as 74HC Series
- Power voltage range : 2.0 ~ 6.0V
- Operation temp. range : -40 ~ +85°C
- | IOH | = IOL = 2mA (min)


■ PIN CONFIGURATION



Pin No.	Pin Name
1	NC
2	INY
3	GND
4	OUTX
5	VCC

Input	Output
INA	OUTX
Low	High
High	Low

■ MARKING



No.	Mark	Contents
①	E	ELM7Sxx, ELM7SxxB series
②	5	ELM7S04, ELM7S04B
③	A~M (excepted I)	Lot No.

■ MAXIMUM ABSOLUTE RATINGS

Parameter	Symbol	Value	Units
Power Voltage	VCC	-0.5~+7.0	V
Input Voltage	VIN	-0.5~VCC+0.5	V
Output Voltage	VOUT	-0.5~VCC+0.5	V
Input Protection Diode Current	IIK	±20	mA
Output Parasitic Diode Current	IOK	±20	mA
Output Current	IOUT	±25	mA
VCC/GND Current	ICC, IGND	±25	mA
Power Dissipation	Pd	200	mW
Storage Temp.	Tstg	-65~+150	°C

CMOS LOGIC IC ELM7S04, ELM7S04B Inverter

■ SUGGESTED OPERATING CONDITION

Parameter	Symbol	Value			Units	
Power Voltage	VCC	2.0~6.0			V	
Input Voltage	VIN	0~VCC			V	
Output Voltage	VOUT	0~VCC			V	
Operating Temp.	Top	-40~+85			°C	
High-input down-time	tr,tf	0~1000 (VCC=2.0V)			ns	
		0~500 (VCC=4.5V)				
		0~400 (VCC=6.0V)				

■ DC ELECTRICAL CHARACTERISTICS

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions
			Min.	Typ.	Max.	Min.	Max.		
Input Voltage	VIH	2.0	1.5	-	-	1.5	-	V	
		4.5	3.15	-	-	3.15	-		
		6.0	4.2	-	-	4.2	-		
	VIL	2.0	-	-	0.5	-	0.5	V	
		4.5	-	-	1.35	-	1.35		
		6.0	-	-	1.8	-	1.8		
Output Voltage	VOH	2.0	1.9	2.0	-	1.9	-	V	VIN= VIL IOH = -20 μA
		4.5	4.4	4.5	-	4.4	-		
		6.0	5.9	6.0	-	5.9	-		
		4.5	4.18	4.35	-	4.13	-		
		6.0	5.68	5.83	-	5.63	-		
	VOL	2.0	-	0.0	0.1	-	0.1	V	VIN= VIH IOL = 20 μA
		4.5	-	0.0	0.1	-	0.1		
		6.0	-	0.0	0.1	-	0.1		
		4.5	-	0.12	0.26	-	0.33		
		6.0	-	0.13	0.26	-	0.33		
Input Current	IIN	6.0	-0.1	-	0.1	-1.0	1.0	μ A	VIN = VCC or GND
Static Current	ICC	6.0	-	-	1.0	-	10.0	μ A	VIN = VCC or GND

■ AC ELECTRICAL CHARACTERISTICS

(CL=15pF, tr=tf=6ns, VCC=5V)

Parameter	Sym.	Top = 25°C			Units	Conditions
		Min.	Typ.	Max.		
High Output Down-time	tTLH	-	4	10	ns	Refer to following test circuit
	tTHL	-	3	10		
Propagation Delay-time	tPLH	-	5	15	ns	Refer to following test circuit
	tPHL	-	5	15		


CMOS LOGIC IC ELM7S04, ELM7S04B Inverter

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions	
			Min.	Typ.	Max.	Min.	Max.			
			2.0	-	22	125	-	155		
High-Output Down-time	tTLH	4.5	-	8	25	-	31	ns	Refer to test circuit	
		6.0	-	6	21	-	26			
		2.0	-	16	125	-	155	ns		
	tTHL	4.5	-	7	25	-	31			
		6.0	-	6	21	-	26			
		2.0	-	18	100	-	125	ns	Refer to test circuit	
Propagation Delay-time	tPLH	4.5	-	8	20	-	25			
		6.0	-	7	17	-	21			
		2.0	-	17	100	-	125			
	tPHL	4.5	-	7	20	-	25	ns	Refer to test circuit	
		6.0	-	6	17	-	21			
Input Capacity	CIN	-	-	5	10	-	10	pF		
Equivalent Inner Capacity	CPD	-	-	10	-	-	-	pF		

* CPD is IC's inner equivalent capacity which is calculated from non-loaded operating current consumption referred to following test circuit. Averaged operating current consumption at non-load is calculated as following formula;


$$ICC (\text{opr}) = CPD \cdot VCC \cdot f_{IN} + ICC$$

■ TEST CIRCUIT

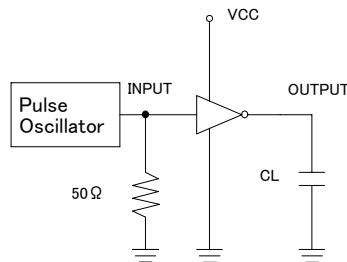

* Output should be opened when measuring current consumption.

■ MEASURED WAVE PATTERN

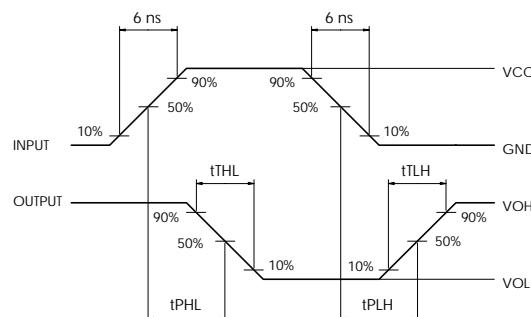

ELM7SU04, ELM7SU04B Unbuffer Inverter


■ DESCRIPTION

ELM7SU04, ELM7SU04B are CMOS unbuffer inverter ICs. They realize a high speed operation similar to LS-TTL with a lower power consumption by CMOS features.

■ FEATURES

- Package : SOT-25 package
- Same electrical characteristics as 74HC Series
- Power voltage range : 2.0 ~ 6.0V
- Operation temp. range : -40 ~ +85°C
- | IOH | = IOL = 2mA (min)


■ PIN CONFIGURATION



Pin No.	Pin Name
1	NC
2	INY
3	GND
4	OUTX
5	VCC

Input	Output
INA	OUTX
Low	High
High	Low

■ MARKING



No.	Mark	Contents
①	E	ELM7Sxx, ELM7SxxB series
②	6	ELM7SU04, ELM7SU04B
③	A~M (excepted I)	Lot No.

■ MAXIMUM ABSOLUTE RATINGS

Parameter	Symbol	Value	Units
Power Voltage	VCC	-0.5~+7.0	V
Input Voltage	VIN	-0.5~VCC+0.5	V
Output Voltage	VOUT	-0.5~VCC+0.5	V
Input Protection Diode Current	I _{IK}	±20	mA
Output Parasitic Diode Current	I _{OK}	±20	mA
Output Current	I _{O_{UT}}	±25	mA
VCC/GND Current	I _{CC} , I _{GND}	±25	mA
Power Dissipation	P _d	200	mW
Storage Temp.	T _{stg}	-65~+150	°C

CMOS LOGIC IC ELM7SU04, ELM7SU04B Unbuffer Inverter

■ SUGGESTED OPERATING CONDITION

Parameter	Symbol	Value			Units	
Power Voltage	VCC	2.0~6.0			V	
Input Voltage	VIN	0~VCC			V	
Output Voltage	VOUT	0~VCC			V	
Operating Temp.	Top	-40~+85			°C	
High-input down-time	tr,tf	0~1000 (VCC=2.0V)			ns	
		0~500 (VCC=4.5V)				
		0~400 (VCC=6.0V)				

■ DC ELECTRICAL CHARACTERISTICS

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions
			Min.	Typ.	Max.	Min.	Max.		
Input Voltage	VIH	2.0	1.7	-	-	1.7	-	V	
		4.5	3.6	-	-	3.6	-		
		6.0	4.8	-	-	4.8	-		
	VIL	2.0	-	-	0.3	-	0.3	V	
		4.5	-	-	0.9	-	0.9		
		6.0	-	-	1.2	-	1.2		
Output Voltage	VOH	2.0	1.8	2.0	-	1.8	-	V	VIN= VIL IOH = -20 μA
		4.5	4.0	4.5	-	4.0	-		
		6.0	5.5	6.0	-	5.5	-		
		4.5	4.18	4.31	-	4.13	-		
		6.0	5.68	5.80	-	5.63	-		
	VOL	2.0	-	0.0	0.2	-	0.2	V	VIN= VIH IOL = 20 μ A
		4.5	-	0.0	0.5	-	0.2		
		6.0	-	0.0	0.5	-	0.5		
		4.5	-	0.17	0.26	-	0.33		
		6.0	-	0.18	0.26	-	0.33		
Input Current	IIN	6.0	-0.1	-	0.1	-1.0	1.0	μ A	VIN = VCC or GND
Static Current	ICC	6.0	-	-	1.0	-	10.0	μ A	VIN = VCC or GND

■ AC ELECTRICAL CHARACTERISTICS

(CL=15pF, tr=tf=6ns, VCC=5V)


Parameter	Sym.	Top = 25°C			Units	Conditions
		Min.	Typ.	Max.		
High Output Down-time	tTLH	-	4	10	ns	Refer to following test circuit
	tTHL	-	3	10		
Propagation Delay-time	tPLH	-	5	15	ns	Refer to following test circuit
	tPHL	-	5	15		

CMOS LOGIC IC ELM7SU04, ELM7SU04B Unbuffer Inverter

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions	
			Min.	Typ.	Max.	Min.	Max.			
High-Output Down-time	tTLH	2.0	-	29	125	-	155	ns	Refer to test circuit	
		4.5	-	11	25	-	31			
		6.0	-	11	21	-	26			
	tTHL	2.0	-	26	125	-	155	ns		
		4.5	-	9	25	-	31			
		6.0	-	8	21	-	26			
Propagation Delay-time	tPLH	2.0	-	18	100	-	125	ns	Refer to test circuit	
		4.5	-	8	20	-	25			
		6.0	-	7	17	-	21			
	tPHL	2.0	-	17	100	-	125	ns		
		4.5	-	7	20	-	25			
		6.0	-	6	17	-	21			
Input Capacity	CIN	-	-	5	10	-	10	pF		
Equivalent Inner Capacity	CPD	-	-	10	-	-	-	pF		


* CPD is IC's inner equivalent capacity which is calculated from non-loaded operating current consumption referred to following test circuit. Averaged operating current consumption at non-load is calculated as following formula;
 $ICC (\text{opr}) = CPD \cdot VCC \cdot f_{IN} + ICC$

TEST CIRCUIT

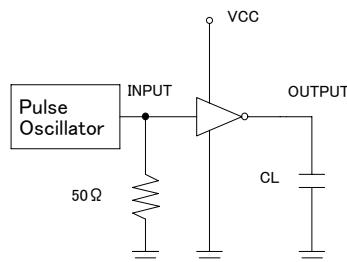

* Output should be opened when measuring current consumption.

MEASURED WAVE PATTERN

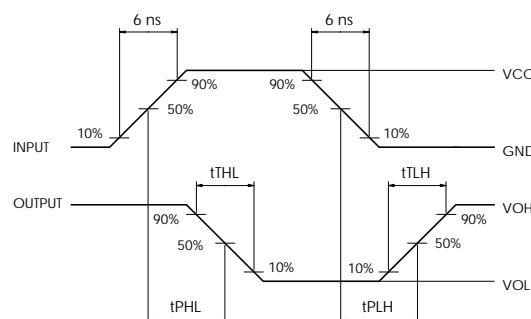

ELM7SU04W, ELM7SU04BW Unbuffer Inverter × 2


■ DESCRIPTION

ELM7SU04W, ELM7SU04BW are CMOS unbuffer inverter ICs. They realize a high speed operation similar to LS-TTL with a lower power consumption by CMOS features.

■ FEATURES

- Package : SOT-26 package
- Same electrical characteristics as 74HC Series
- Power voltage range : 2.0 ~ 6.0V
- Operation temp. range : -40 ~ +85°C
- | IOH | = IOL = 2mA (min)


■ PIN CONFIGURATION



Pin No.	Pin Name
1	OUTA
2	GND
3	INB
4	OUTB
5	VCC
6	INA

Input	Output
INA	OUTA
INB	OUTB
Low	High
High	Low

■ MARKING



No.	Mark	Contents
①	E	ELM7Sxx, ELM7SxxB series
②	B	ELM7SU04W, ELM7SU04BW
③	A~M (excepted I)	Lot No.

■ MAXIMUM ABSOLUTE RATINGS

Parameter	Symbol	Value	Units
Power Voltage	VCC	-0.5~+7.0	V
Input Voltage	VIN	-0.5~VCC+0.5	V
Output Voltage	VOUT	-0.5~VCC+0.5	V
Input Protection Diode Current	IIK	±20	mA
Output Parasitic Diode Current	IOK	±20	mA
Output Current	IOUT	±25	mA
VCC/GND Current	ICC, IGND	±25	mA
Power Dissipation	Pd	200	mW
Storage Temp.	Tstg	-65~+150	°C

CMOS LOGIC IC ELM7SU04W, ELM7SU04BW Unbuffer Inverter × 2

■ SUGGESTED OPERATING CONDITION

Parameter	Symbol	Value			Units	
Power Voltage	VCC	2.0~6.0			V	
Input Voltage	VIN	0~VCC			V	
Output Voltage	VOUT	0~VCC			V	
Operating Temp.	Top	-40~+85			°C	
High-input down-time	tr,tf	0~1000 (VCC=2.0V)			ns	
		0~500 (VCC=4.5V)				
		0~400 (VCC=6.0V)				

■ DC ELECTRICAL CHARACTERISTICS

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions
			Min.	Typ.	Max.	Min.	Max.		
Input Voltage	VIH	2.0	1.7	-	-	1.7	-	V	
		4.5	3.6	-	-	3.6	-		
		6.0	4.8	-	-	4.8	-		
	VIL	2.0	-	-	0.3	-	0.3	V	
		4.5	-	-	0.9	-	0.9		
		6.0	-	-	1.2	-	1.2		
Output Voltage	VOH	2.0	1.8	2.0	-	1.8	-	V	VIN= VIH or VIL IOH = -20 μA IOH = -2mA IOH = -2.6mA
		4.5	4.0	4.5	-	4.0	-		
		6.0	5.5	6.0	-	5.5	-		
		4.5	4.18	4.31	-	4.13	-		
		6.0	5.68	5.80	-	5.63	-		
	VOL	2.0	-	0.0	0.2	-	0.2	V	VIN= VIH IOL = 20 μA IOL = 2mA IOL = 2.6mA
		4.5	-	0.0	0.5	-	0.5		
		6.0	-	0.0	0.5	-	0.5		
		4.5	-	0.17	0.26	-	0.33		
		6.0	-	0.18	0.26	-	0.33		
Input Current	IIN	6.0	-0.1	-	0.1	-1.0	1.0	μ A	VIN = VCC or GND
Static Current	ICC	6.0	-	-	1.0	-	10.0	μ A	VIN = VCC or GND

■ AC ELECTRICAL CHARACTERISTICS

(CL=15pF, tr=tf=6ns, VCC=5V)

Parameter	Sym.	Top = 25°C			Units	Conditions
		Min.	Typ.	Max.		
High Output Down-time	tTLH	-	5	10	ns	Refer to following test circuit
	tTHL	-	5	10		
Propagation Delay-time	tPLH	-	5	15	ns	Refer to following test circuit
	tPHL	-	5	15		


CMOS LOGIC IC ELM7SU04W, ELM7SU04BW Unbuffer Inverter × 2

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C			Units	Conditions	
			Min.	Typ.	Max.	Min.	Max.				
High-Output Down-time	tTLH	2.0	—	50	125	—	155		ns	Refer to test circuit	
		4.5	—	14	25	—	31				
		6.0	—	12	21	—	26				
	tTHL	2.0	—	50	125	—	155		ns		
		4.5	—	14	25	—	31				
		6.0	—	12	21	—	26				
Propagation Delay-time	tPLH	2.0	—	48	100	—	125		ns	Refer to test circuit	
		4.5	—	12	20	—	25				
		6.0	—	9	17	—	21				
	tPHL	2.0	—	48	100	—	125		ns		
		4.5	—	12	20	—	25				
		6.0	—	9	17	—	21				
Input Capacity	CIN	—	—	5	10	—	10	pF			
Equivalent Inner Capacity	CPD	—	—	10	—	—	—	pF			

* CPD is IC's inner equivalent capacity which is calculated from non-loaded operating current consumption referred to following test circuit. Averaged operating current consumption at non-load is calculated as following formula;


$$ICC (\text{opr}) = CPD \cdot VCC \cdot f_{IN} + ICC$$

■ TEST CIRCUIT

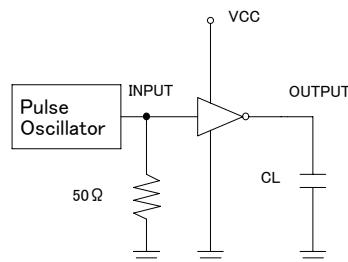

* Output should be opened when measuring current consumption.

■ MEASURED WAVE PATTERN

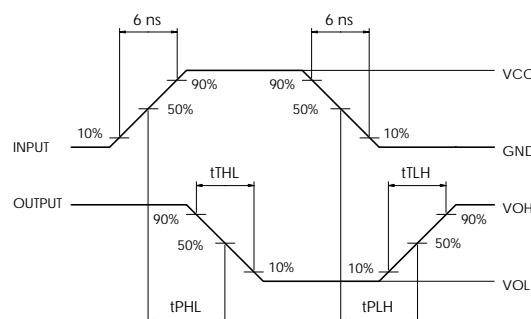

ELM7S86, ELM7S86B 2-input EXCLUSIVE OR Gate


■ DESCRIPTION

ELM7S86, ELM7S86B are CMOS 2-input EXOR gate ICs. They realize a high speed operation similar to LS-TTL with a lower power consumption by CMOS features. An inner circuit structure of 3-stages logic gates obtains a wider noise immunity and a constant output.

■ FEATURES

- Package : SOT-25 package
- Same electrical characteristics as 74HC Series
- Power voltage range : 2.0 ~ 6.0V
- Operation temp. range : -40 ~ +85°C
- | IOH | = IOL = 2mA (min)


■ PIN CONFIGURATION



Pin No.	Pin Name
1	INB
2	INA
3	GND
4	OUTX
5	VCC

Input	Output
INA	INB
Low	Low
Low	High
High	Low
High	High

■ MARKING



No.	Mark	Contents
①	E	ELM7Sxx, ELM7SxxB series
②	8	ELM7S86, ELM7S86B
③	A~M (excepted I)	Lot No.

■ MAXIMUM ABSOLUTE RATINGS

Parameter	Symbol	Value	Units
Power Voltage	VCC	-0.5~+7.0	V
Input Voltage	VIN	-0.5~VCC+0.5	V
Output Voltage	VOUT	-0.5~VCC+0.5	V
Input Protection Diode Current	IIK	±20	mA
Output Parasitic Diode Current	IOK	±20	mA
Output Current	IOUT	±25	mA
VCC/GND Current	ICC, IGND	±25	mA
Power Dissipation	Pd	200	mW
Storage Temp.	Tstg	-65~+150	°C

CMOS LOGI IC ELM7S86, ELM7S86B 2-input EXCLUSIVE OR Gate

■ SUGGESTED OPERATING CONDITION

Parameter	Symbol	Value			Units	
Power Voltage	VCC	2.0~6.0			V	
Input Voltage	VIN	0~VCC			V	
Output Voltage	VOUT	0~VCC			V	
Operating Temp.	Top	-40~+85			°C	
High-input down-time	tr,tf	0~1000 (VCC=2.0V)			ns	
		0~500 (VCC=4.5V)				
		0~400 (VCC=6.0V)				

■ DC ELECTRICAL CHARACTERISTICS

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions	
			Min.	Typ.	Max.	Min.	Max.			
Input Voltage	VIH	2.0	1.5	-	-	1.5	-	V		
		4.5	3.15	-	-	3.15	-			
		6.0	4.2	-	-	4.2	-			
	VIL	2.0	-	-	0.5	-	0.5	V		
		4.5	-	-	1.35	-	1.35			
		6.0	-	-	1.8	-	1.8			
Output Voltage	VOH	2.0	1.9	2.0	-	1.9	-	V	VIN= VIH or VIL	
		4.5	4.4	4.5	-	4.4	-			
		6.0	5.9	6.0	-	5.9	-			
		4.5	4.18	4.31	-	4.13	-			
		6.0	5.68	5.80	-	5.63	-			
	VOL	2.0	-	0.0	0.1	-	0.1	V	VIN= VIH	
		4.5	-	0.0	0.1	-	0.1			
		6.0	-	0.0	0.1	-	0.1			
		4.5	-	0.17	0.26	-	0.33			
		6.0	-	0.18	0.26	-	0.33			
Input Current	IIN	6.0	-0.1	-	0.1	-1.0	1.0	μA	VIN = VCC or GND	
Static Current	ICC	6.0	-	-	1.0	-	10.0	μA	VIN = VCC or GND	

■ AC ELECTRICAL CHARACTERISTICS

(CL=15pF, tr=tf=6ns, VCC=5V)


Parameter	Sym.	Top = 25°C			Units	Conditions
		Min.	Typ.	Max.		
High Output Down-time	tTLH	-	7	10	ns	Refer to following test circuit
	tTHL	-	7	10		
Propagation Delay-time	tPLH	-	9	20	ns	Refer to following test circuit
	tPHL	-	9	20		

CMOS LOGI IC ELM7S86, ELM7S86B 2-input EXCLUSIVE OR Gate

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions	
			Min.	Typ.	Max.	Min.	Max.			
			2.0	—	50	125	—	155		
High-Output Down-time	tTLH	4.5	—	14	25	—	31	ns	Refer to test circuit	
		6.0	—	12	21	—	26			
		2.0	—	50	125	—	155	ns		
	tTHL	4.5	—	14	25	—	31			
		6.0	—	12	21	—	26			
		2.0	—	60	135	—	170	ns	Refer to test circuit	
Propagation Delay-time	tPLH	4.5	—	16	27	—	34			
		6.0	—	10	22	—	28			
		2.0	—	60	135	—	170	ns		
	tPHL	4.5	—	16	27	—	34			
		6.0	—	10	22	—	28			
Input Capacity	CIN	—	—	5	10	—	10	pF		
Equivalent Inner Capacity	CPD	—	—	10	—	—	—	pF		


* CPD is IC's inner equivalent capacity which is calculated from non-loaded operating current consumption referred to following test circuit. Averaged operating current consumption at non-load is calculated as following formula;
 $ICC (\text{opr}) = CPD \cdot VCC \cdot f_{IN} + ICC$

■ TEST CIRCUIT

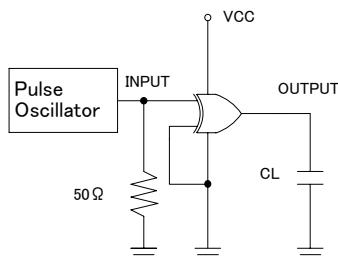

* Output should be opened when measuring current consumption.

■ MEASURED WAVE PATTERN

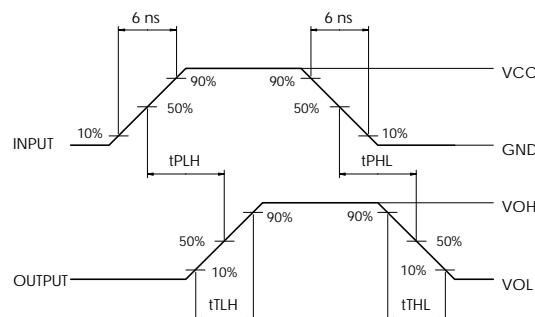

ELM7S66, ELM7S66B Analog Switch


■ DESCRIPTION

ELM7S66, ELM7S66B are CMOS analog switches. They realize a high speed operation with low power consumption by CMOS features. With a low on resistance and a high transmission rate, they realize a wider input voltage range.

■ FEATURES

- Package : SOT-25 package
- Same electrical characteristics as 74HC Series
- Power voltage range : 2.0 ~ 6.0V
- Operation temp. range : -40 ~ +85°C
- | IOH | = IOL = 2mA (min)


■ PIN CONFIGURATION



Pin No.	Pin Name
1	IN/OUT
2	OUT/IN
3	GND
4	Control
5	VCC

Control	Switch
Low	OFF
High	ON

■ MARKING



No.	Mark	Contents
①	E	ELM7Sxx, ELM7SxxB series
②	9	ELM7S66, ELM7S66B
③	A~M (excepted I)	Lot No.

■ MAXIMUM ABSOLUTE RATINGS

Parameter	Symbol	Value	Units
Power Voltage	VCC	-0.5~+7.0	V
Input Voltage	VIN	-0.5~VCC+0.5	V
Output Voltage	VOUT	-0.5~VCC+0.5	V
Input Protection Diode Current	I _{IK}	±20	mA
Output Parasitic Diode Current	I _{OK}	±20	mA
Output Current	I _{OUT}	±25	mA
VCC/GND Current	I _{CC} , I _{GND}	±25	mA
Power Dissipation	P _d	200	mW
Storage Temp.	T _{stg}	-65~+150	°C

CMOS LOGIC IC ELM7S66, ELM7S66B Analog Switch

■ SUGGESTED OPERATING CONDITION

Parameter	Symbol	Value		Units
Power Voltage	VCC	2.0~6.0		V
Input Voltage	VIN	0~VCC		V
Output Voltage	VOUT	0~VCC		V
Operating Temp.	Top	-40~+85		°C
High-input down-time	tr,tf	0~1000 (VCC=2.0V) 0~500 (VCC=4.5V) 0~400 (VCC=6.0V)		ns

■ DC ELECTRICAL CHARACTERISTICS

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions
			Min.	Typ.	Max.	Min.	Max.		
Input Voltage	VIH	2.0	1.5	—	—	1.5	—	V	
		4.5	3.15	—	—	3.15	—		
		6.0	4.2	—	—	4.2	—		
	VIL	2.0	—	—	0.5	—	0.5	V	
		4.5	—	—	1.35	—	1.35		
		6.0	—	—	1.8	—	1.8		
ON-Resistor	RON	2.0	—	2000	5000	—	6250	Ω	VCONT=VIH VIN=0~VCC IIN/OUT=1mA
		4.5	—	100	200	—	250		
		6.0	—	60	170	—	210		
SW-Off Leak-Current	IS (Off)	6.0	-0.1	—	0.1	-1.0	1.0	μA	VCONT=VIL VIN=VCC, VOUT=GND
SW-ON Leak-Current	IS (On)	6.0	-0.1	—	0.1	-1.0	1.0	μA	VCONT=VIH VIN = VCC or GND
Cont Input Current	ICONT	6.0	-0.1	—	0.1	-1.0	1.0	μA	VIN = VCC or GND
Static Current	ICC	6.0	—	—	1.0	—	10.0	μA	VIN = VCC or GND

CMOS LOGIC IC ELM7S66, ELM7S66B Analog Switch

■AC ELECTRICAL CHARACTERISTICS

Parameter	Sym.	VCC	Ta = 25°C			Ta = -40 ~ +85°C		Units	Conditions
			Min.	Typ.	Max.	Min.	Max.		
Propagation Delay-time	tPLH	2.0	-	-	50	-	65	ns	CL=50pF RL=10kΩ
		3.3	-	4	10	-	13		
		5.0	-	-	9	-	11		
Output Enable-Time	tZL	2.0	-	-	115	-	145	ns	CL=50pF RL=1kΩ
		3.3	-	10	23	-	29		
		5.0	-	-	20	--	25		
Output Disable-Time	tLZ	2.0	-	-	115	-	145	ns	CL=50pF RL=1kΩ
		4.5	-	14	23	-	29		
		6.0	-	-	20	--	25		
Maximum Control Input Frequency	fIN	2.0	-	20	-	-	-	MHz	RL=1kΩ CL=15pF VOUT=VCC/2
		4.5	-	30	-	-	-		
		6.0	-	30	-	-	-		
Control Input Capacity	CIN	-	-	5	10	-	10	pF	
SW-Input/Output Capacity	CIN/OUT	-	-	6	-	-	-	pF	
Feed-Through Capacity	CIN-OUT	-	-	0.5	-	-	-	pF	Refer to test circuit
Equivalent Inner Capacity	CPD	-	-	13	-	-	-	pF	


* CPD is IC's inner equivalent capacity which is calculated from non-loaded operating current consumption referred to following test circuit. Averaged operating current consumption at non-load is calculated as following formula;

$$ICC_{(opr)} = CPD \cdot VCC \cdot fIN + ICC$$

CMOS LOGIC IC ELM7S66, ELM7S66B Analog Switch


■ TEST CIRCUIT

● RON : ON Resistor

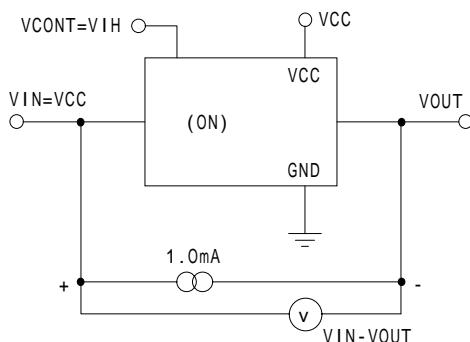


$$R_{ON} = \frac{V_{IN} - V_{OUT}}{10^{-3}} (\Omega)$$

● IS(OFF) : SW-OFF leak, IS(ON) : SW-ON leak Current

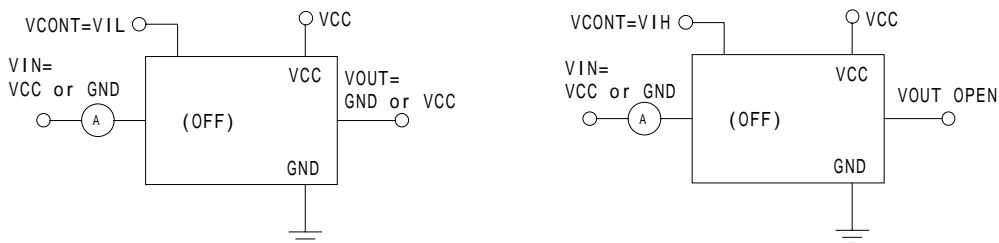


● tPLH, tPHL : Propagation delay-time (SW-input → SW-output)

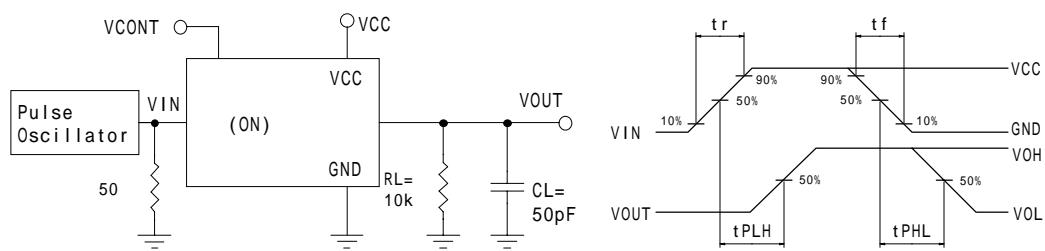


CMOS LOGIC IC ELM7S66, ELM7S66B Analog Switch


● **tZH, tZL/tHZ, tLZ : Output enable, Output disable time**

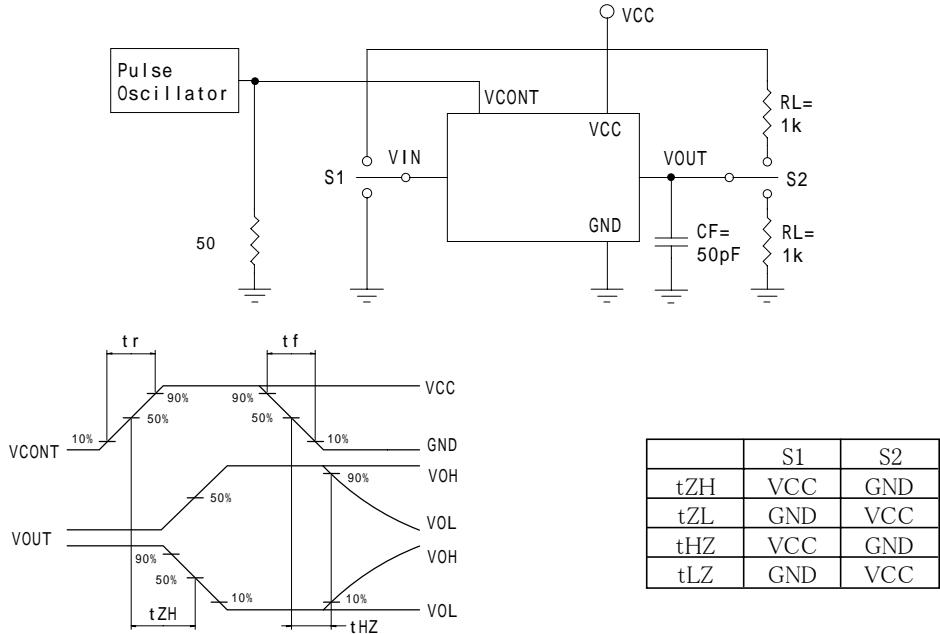

● **Maximum controlled input frequency**

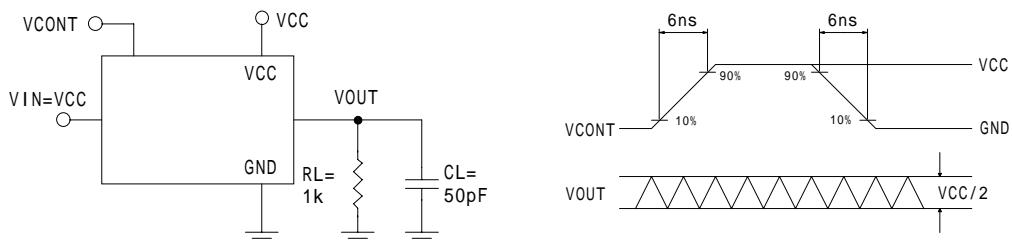

● **Feed-through capacity**

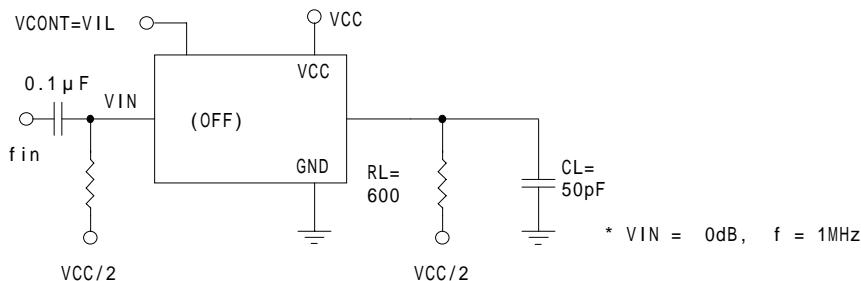

ELM7S14, ELM7S14B SCHMITT Inverter


■ DESCRIPTION

ELM7S14, ELM7S14B are CMOS schmitt inverter ICs. They realizes a high speed operation similar to LS-TTL with a lower power consumption by CMOS features. An inner circuit structure of 3-stages logic gates obtains a wider noise immunity and a constant output.

■ FEATURES

- Package : SOT-25 package
- Same electrical characteristics as 74HC Series
- Power voltage range : 2.0 ~ 6.0V
- Operation temp. range : -40 ~ +85°C
- | IOH | = IOL = 2mA (min)


■ PIN CONFIGURATION



Pin No.	Pin Name
1	NC
2	INY
3	GND
4	OUTX
5	VCC

Input	Output
INA	OUTX
Low	High
High	Low

■ MARKING



No.	Mark	Contents
①	E	ELM7Sxx, ELM7SxxB series
②	A	ELM7S14, ELM7S14B
③	A~M (excepted I)	Lot No.

■ MAXIMUM ABSOLUTE RATINGS

Parameter	Symbol	Value	Units
Power Voltage	VCC	-0.5~+7.0	V
Input Voltage	VIN	-0.5~VCC+0.5	V
Output Voltage	VOUT	-0.5~VCC+0.5	V
Input Protection Diode Current	I _{IK}	±20	mA
Output Parasitic Diode Current	I _{OK}	±20	mA
Output Current	I _{O_{UT}}	±25	mA
VCC/GND Current	I _{CC} , I _{GND}	±25	mA
Power Dissipation	P _d	200	mW
Storage Temp.	T _{stg}	-65~+150	°C

CMOS LOGIC IC ELM7S14, ELM7S14B SCHMITT Inverter

■ SUGGESTED OPERATING CONDITION

Parameter	Symbol	Value		Units	
Power Voltage	VCC	2.0~6.0		V	
Input Voltage	VIN	0~VCC		V	
Output Voltage	VOUT	0~VCC		V	
Operating Temp.	Top	-40~+85		°C	
High-input down-time	tr,tf	0~1000 (VCC=2.0V)		ns	
		0~500 (VCC=4.5V)			
		0~400 (VCC=6.0V)			

■ DC ELECTRICAL CHARACTERISTICS

Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions
			Min.	Typ.	Max.	Min.	Max.		
Threshold Voltage	Vt+	2.0	-	-	1.5	-	1.5	V	
		4.5	-	-	3.15	-	3.15		
		6.0	-	-	4.2	-	4.2		
	Vt-	2.0	0.3	-	-	0.3	-	V	
		4.5	0.9	-	-	0.9	-		
		6.0	1.2	-	-	1.2	-		
Hysteresis Voltage	Vh	2.0	0.2	-	1.2	0.2	1.2	V	
		4.5	0.4	-	2.25	0.4	2.25		
		6.0	0.6	-	3.0	0.6	3.0		
Output Voltage	VOH	2.0	1.9	2.0	-	1.9	-	V	VIN=VIH or VIL
		4.5	4.4	4.5	-	4.4	-		IOH = -20 μA
		6.0	5.9	6.0	-	5.9	-		IOH = -2mA
		4.5	4.18	4.31	-	4.13	-		IOH = -2.6mA
		6.0	5.68	5.80	-	5.63	-		
	VOL	2.0	-	0.0	0.1	-	0.1	V	VIN=VIH
		4.5	-	0.0	0.1	-	0.1		IOL = 20 μA
		6.0	-	0.0	0.1	-	0.1		IOL = 2mA
		4.5	-	0.17	0.26	-	0.33		IOL = 2.6mA
		6.0	-	0.18	0.26	-	0.33		
Input Current	IIN	6.0	-0.1	-	0.1	-1.0	1.0	μ A	VIN = VCC or GND
Static Current	ICC	6.0	-	-	1.0	-	10.0	μ A	VIN = VCC or GND

CMOS LOGIC IC ELM7S14, ELM7S14B SCHMITT Inverter

■ AC ELECTRICAL CHARACTERISTICS

(CL=15pF, tr=tf=6ns, VCC=5V)

Parameter	Sym.	Top = 25°C			Units	Conditions
		Min.	Typ.	Max.		
High Output Down-time	tTLH	-	5	10	ns	Refer to following test circuit
	tTHL	-	5	10		
Propagation Delay-time	tPLH	-	7	15	ns	Refer to following test circuit
	tPHL	-	7	15		

(CL=50pF, tr=tf=6ns)


Parameter	Sym.	VCC	Top = 25°C			Top = -40~+85°C		Units	Conditions	
			Min.	Typ.	Max.	Min.	Max.			
High-Output Down-time	tTLH	2.0	-	50	125	-	155	ns	Refer to test circuit	
		4.5	-	14	25	-	31			
		6.0	-	12	21	-	26			
	tTHL	2.0	-	50	125	-	155	ns		
		4.5	-	14	25	-	31			
		6.0	-	12	21	-	26			
Propagation Delay-time	tPLH	2.0	-	48	100	-	125	ns	Refer to test circuit	
		4.5	-	12	20	-	25			
		6.0	-	9	17	-	21			
	tPHL	2.0	-	48	100	-	125	ns		
		4.5	-	12	20	-	25			
		6.0	-	9	17	-	21			
Input Capacity	CIN	-	-	5	10	-	10	pF		
Equivalent Inner Capacity	CPD	-	-	10	-	-	-	pF		

* CPD is IC's inner equivalent capacity which is calculated from non-loaded operating current consumption referred to following test circuit. Averaged operating current consumption at non-load is calculated as following formula;

$$ICC (\text{opr}) = CPD \cdot VCC \cdot fIN + ICC$$

CMOS LOGIC IC ELM7S14, ELM7S14B SCHMITT Inverter

■ TEST CIRCUIT

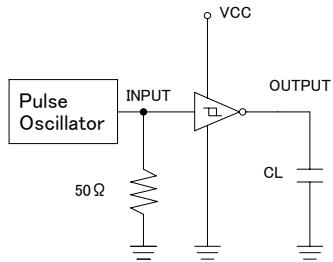

* Output should be opened when measuring current consumption.

■ MEASURED WAVE PATTERN

