




# SBD Type : EP10LA03

## FEATURES

- \* JEDEC SOD-123 Package
- \* Very Low profile 1.1mm Max
- \* Extremely Low Forward Voltage Drop
- \* Low Power Loss, High Efficiency
- \* High Surge Capability
- \* Low Thermal Resistance
- \* Packaged in 8mm Tape and Reel

## OUTLINE DRAWING

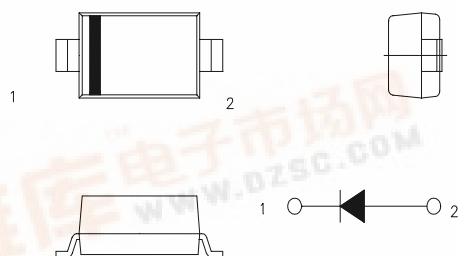

## Maximum Ratings

Approx Net Weight: 0.011g

Rating	Symbol	EP10LA03				Unit		
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	30				V		
Direct Forward Current	I <sub>dc</sub>	1.0	T <sub>l</sub> =100°C *	Direct Current		A		
		1.0	T <sub>a</sub> =30°C					
Average Rectified Output Current	I <sub>o</sub>	0.8	T <sub>l</sub> =98°C	Rectangular Current		A		
		0.8	T <sub>a</sub> =25°C					
Surge Forward Current	I <sub>FSM</sub>	12	50Hz Half Sine Wave, 1cycle Non-repetitive					
Operating Junction Temperature Range	T <sub>jw</sub>	-40 to +125				°C		
Storage Temperature Range	T <sub>stg</sub>	-40 to +125				°C		

## Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I <sub>RM</sub>	T <sub>j</sub> = 25°C, V <sub>RM</sub> = V <sub>RRM</sub>	-	-	2	mA
Peak Forward Voltage	V <sub>FM</sub>	T <sub>j</sub> = 25°C, I <sub>FM</sub> = 1.0A	-	-	0.39	V
Thermal Resistance	R <sub>th(j-a)</sub>	Junction to Ambient *	-	-	270	°C /W
	R <sub>th(j-l)</sub>	Junction to Lead	-	-	70	

\* Glass Epoxy Substrate Mounted (Soldering Lands=1x1mm, Both Sides)  
(T<sub>l</sub>: Lead Temperature)



## EP10LA03 OUTLINE DRAWING (Dimensions in mm)

