

SPECIFICATION

DEVICE NAME : SILICON DIODE

TYPE NAME : ERW11-120

SPEC. No. :

DATE :

Fuji Electric Co.,Ltd.

This Specification is subject to change without notice.


		DATE	NAME	APPROVED	Fuji Electric Co.,Ltd	
DRAWN	CHECKED				WYG.NO.	1/6




Ratings and characteristics of Fuji silicon diode

ERW11-120

1. Outline Drawing

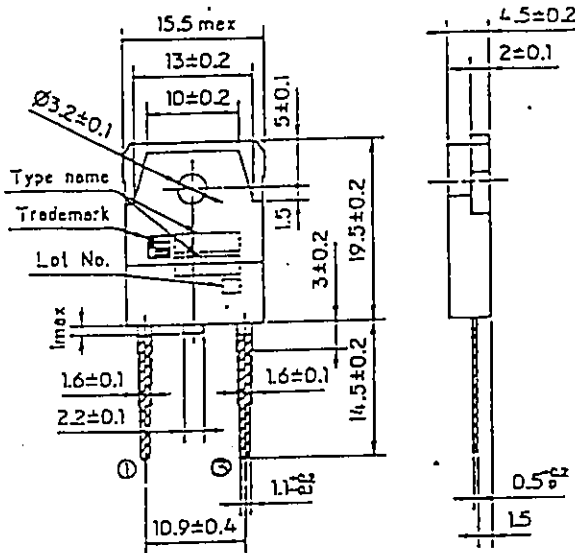

DIMENSIONS ARE IN MILLIMETERS.




CONNECTION

- ⊖ CATHODE
- ⊕ ANODE

JEDEC : TO-247
EIAJ : SC-65

2. Equivalent circuit

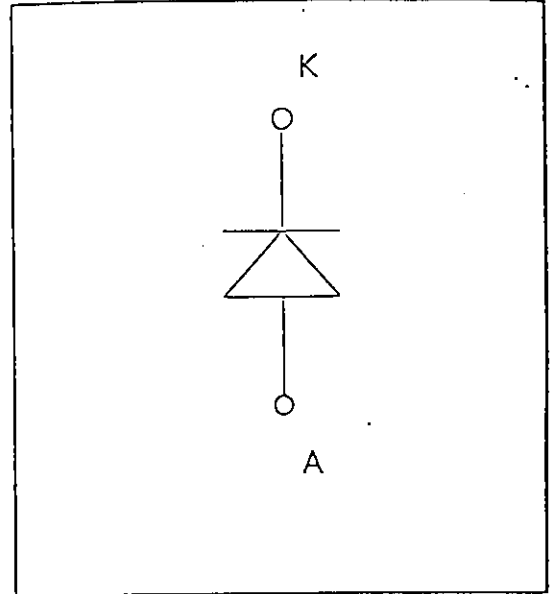

3. Absolute maximum ratings (Tc=25°C)

Items	Symbols	Conditions	Ratings	Units
Repetitive Reverse Voltage	V_{RRM}	—————	1200	V
Repetitive peak surge current	I_{FM}	20kHz Duty50% Squ. wave	Tc=122°C 15	A
			Tc= 25°C 48	A
Average rectified forward current	$I_{F(AV)}$	DC	15	A
Non-repetitive peak surge current	I_{FSM}	Pulse10ms, sin wave	100	A
Maximam Power Dissipaion	P_o	—————	90	W
Operating Temperature	Tj	—————	+150	°C
Storage Temperature	Tstg	—————	-40 ~+150	°C
Mounting Screw Torque	—	—————	50	N · cm

4. Electrical Characteristics (at $T_c=25^{\circ}\text{C}$ unless otherwise specified)


Items	Symbols	Characteristics			Conditions	Unit
		min.	typ.	max.		
Reverse Current	I_R	—	—	1.0	$V_R = 1200\text{V}$	mA
forward voltage	V_F	—	—	3.0	$I_F = 15\text{A}$	V
Reverse recovery time	t_{rr}	—	—	0.3	$I_F=15\text{A}, V_R=200\text{V}$ $di/dt=100\text{A}/\mu\text{s}$	μs

5. Thermal resistance characteristics


Items	Symbols	Characteristics			Conditions	Unit
		min.	typ.	max.		
Thermal resistance	$R_{th(j-c)}$	—	—	1.39	junction to case	$^{\circ}\text{C}/\text{W}$

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Forward voltage vs. Forward current

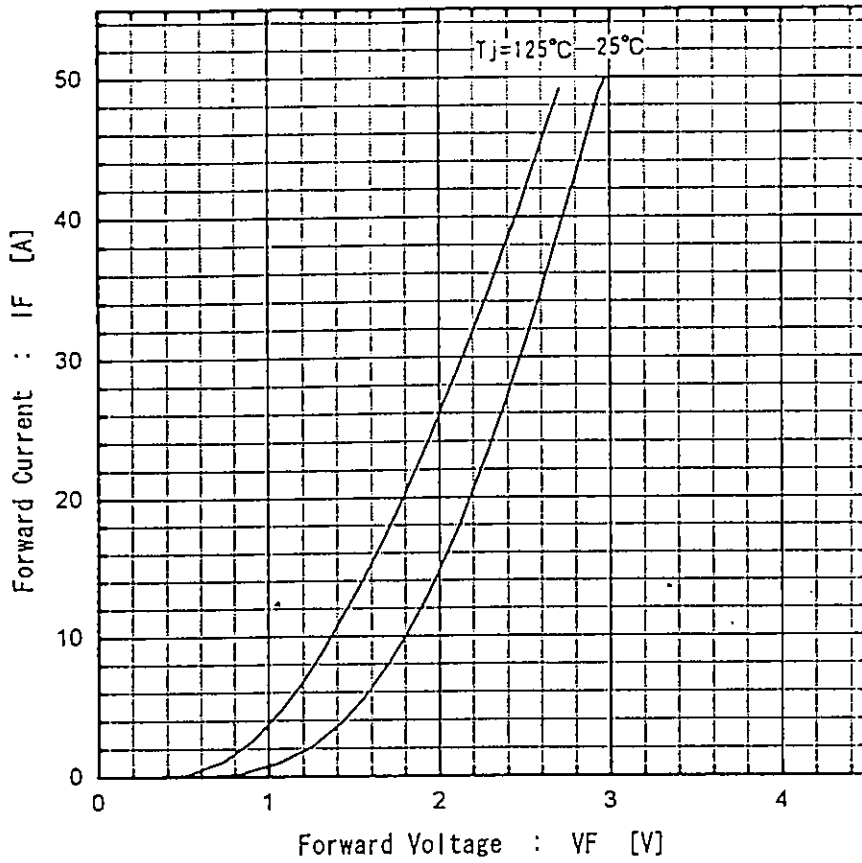


Reverse recovery characteristics vs. $-di/dt$
IF=15A, Tj=125°C

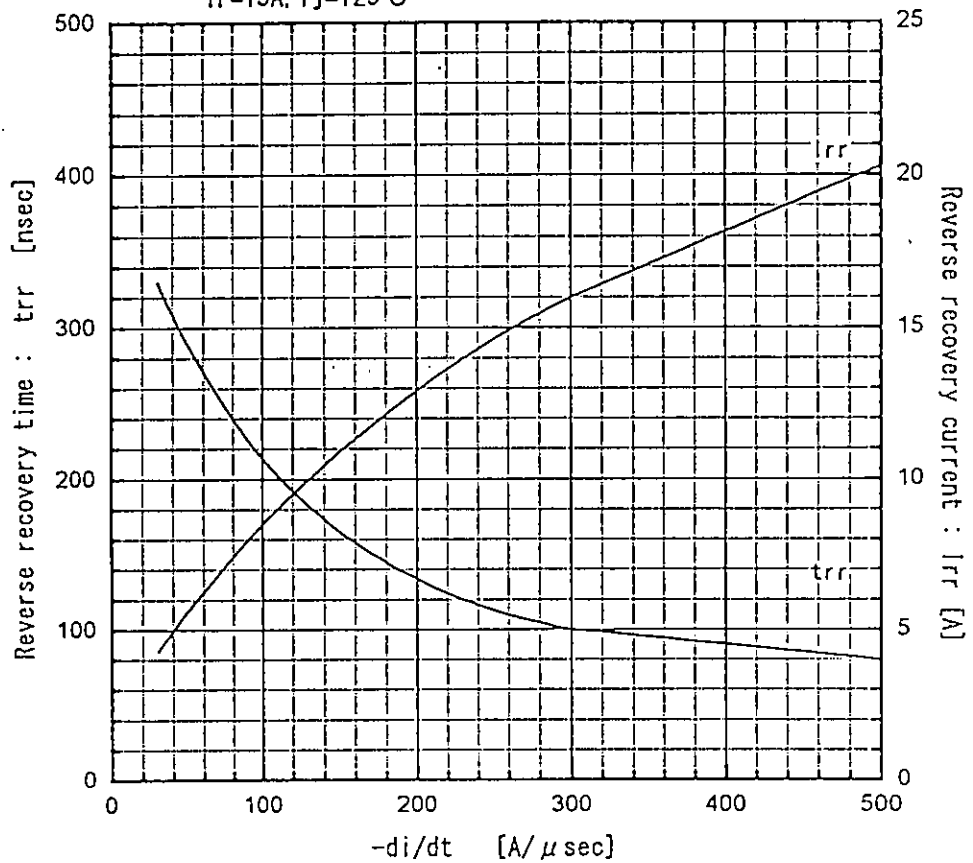


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party, nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.


Reverse recovery time vs. Forward current
 $VR=200V, -di/dt=100A/\mu sec$

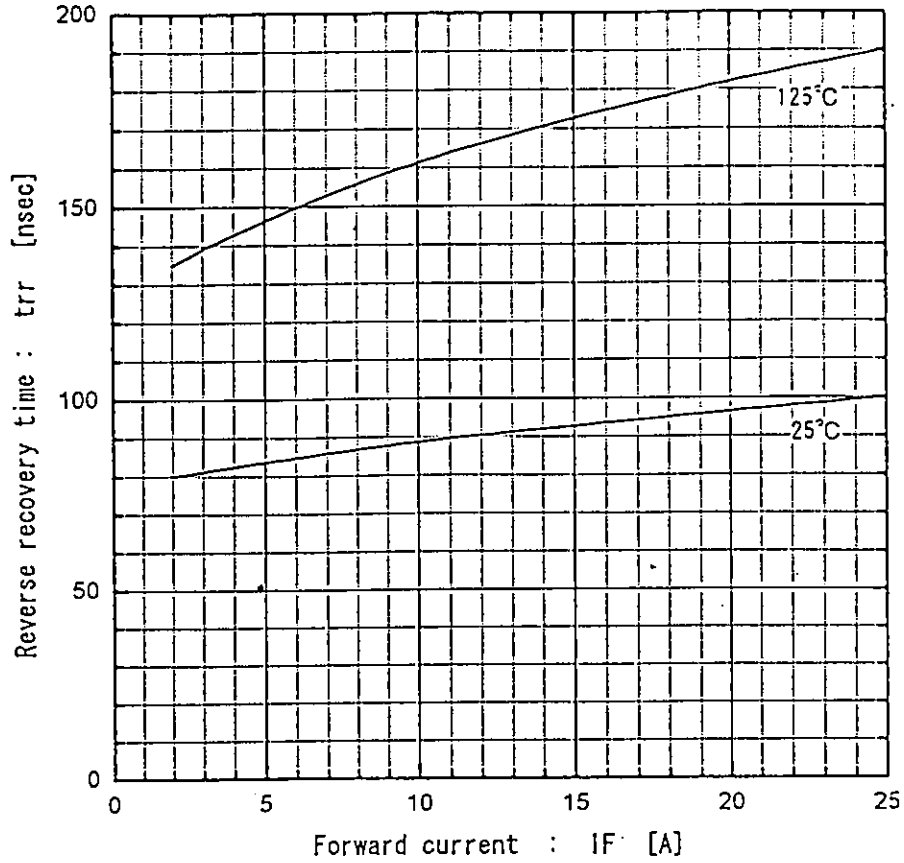

Reverse recovery current vs. Forward current
 $VR=200V, -di/dt=100A/\mu sec$

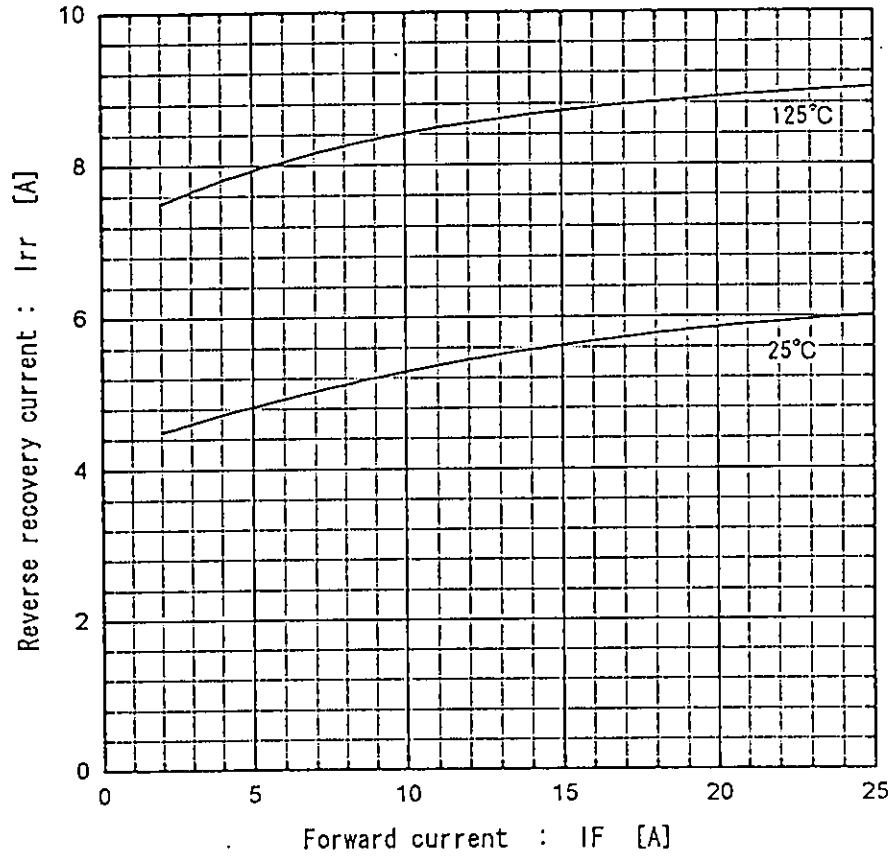


ERW11-120
Transient thermal resistance

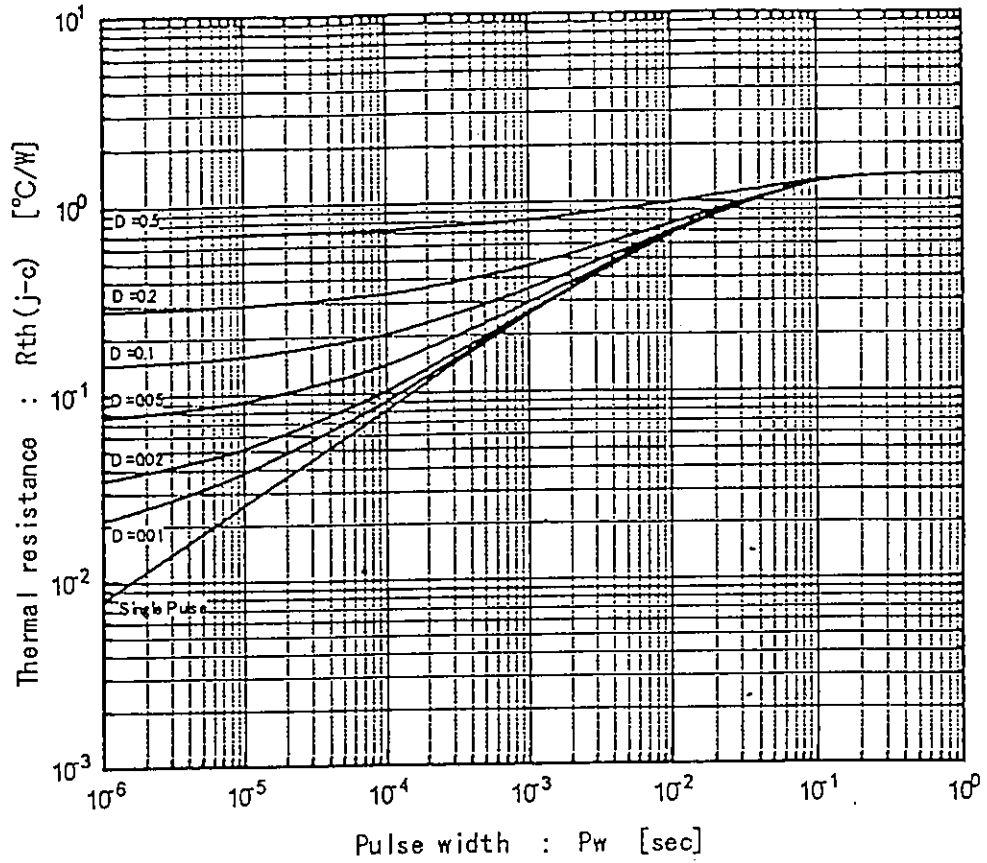

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Forward current vs. Max. allowable case temperature

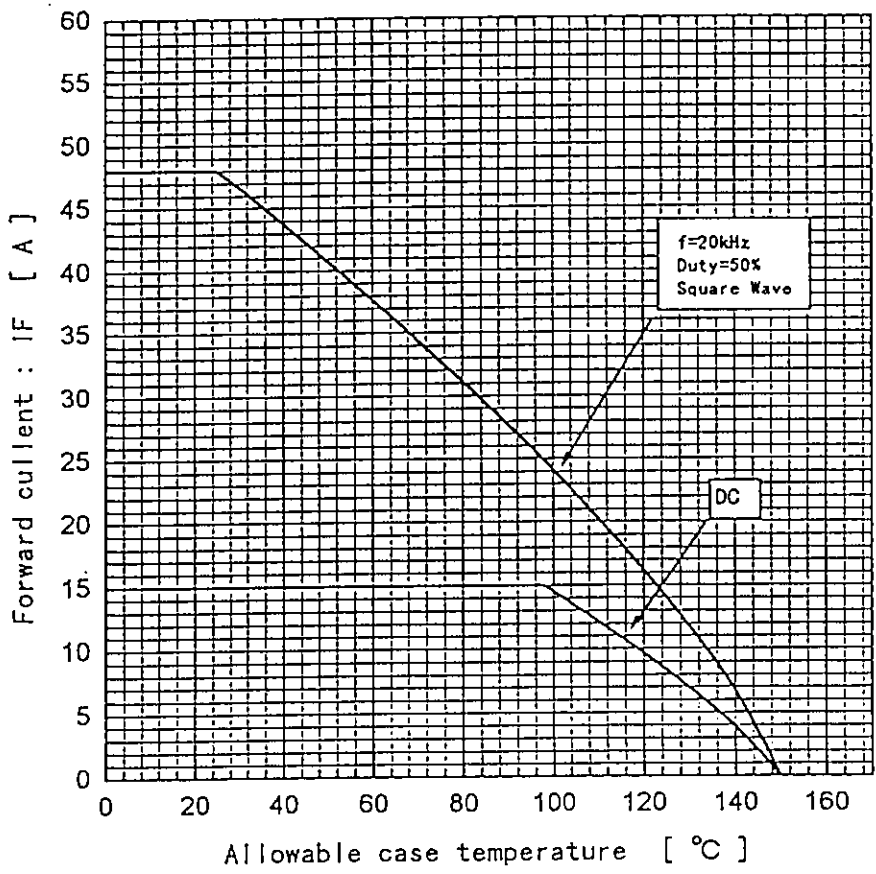

For more information, contact:

Collmer Semiconductor, Inc.

P.O. Box 702708

Dallas, TX 75370

972-733-1700

972-381-9991 Fax

<http://www.collmer.com>