



E-Series Surface Mount Mixer

20 - 1500 MHz

ESMD-C2

V3.00

Features

- LO Power: +7 dBm
- Up to +1 dBm RF
- Surface Mount

Specifications @ 25°C

Frequency Range		
RF		20 - 1500 MHz
LO		20 - 1500 MHz
IF		DC - 1500 MHz
Conversion Loss (dB)		
40 - 750 MHz	Typical	Maximum
	7.0	8.5
20 - 1500 MHz	8.5	9.0
Isolation (dB)		
LO to RF	Typical	Minimum
20 - 200 MHz	50	35
200 - 750 MHz	35	25
750 - 1500 MHz	20	10
LO to IF		
20 - 200 MHz	40	25
200 - 750 MHz	25	18
750 - 1500 MHz	15	8

Operating Characteristics

Impedance	50 Ohms Nominal
RF input for 1dB Compression	+ 1 dBm
DC Polarity	Positive


Ordering Information

Part No.	Packaging
ESMD-C2	SM-2 in Tubes
ESMD-C2TR	SM-2 in Tape & Reel

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	50 mW
Peak IF Current	40 mA
Storage Temperature	-55°C to 100°C
Operating Temperature	-55°C to 100°C
Pin Temperature (10 Seconds)	260°C

SM-2

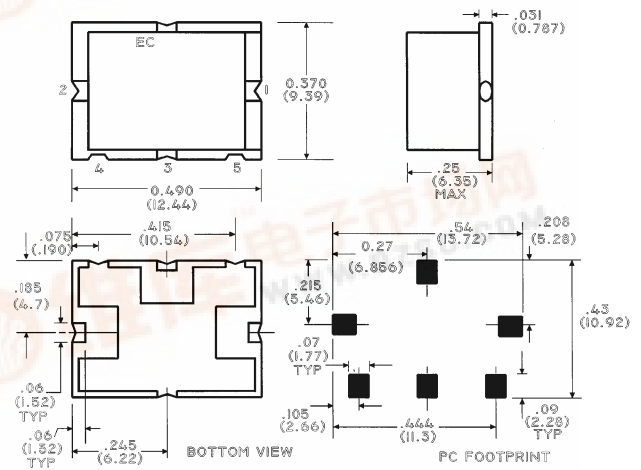

Pin Configuration

Function	Pin No.
LO	2
RF	1
IF	3
Ground	4,5