


# International **IOR** Rectifier

- Low Profile (<0.7 mm)
  - Dual Sided Cooling Compatible ①
  - Ultra Low Package Inductance
  - Optimized for High Frequency Switching above 1MHz ①
  - Ideal for CPU Core DC-DC Converters
  - Optimized for SyncFET Socket of Sync. Buck Converter ①
  - Low Conduction Losses
  - Compatible with Existing Surface Mount Techniques ①

<b>V<sub>DSS</sub></b>	<b>V<sub>GS</sub></b>	<b>R<sub>DS(on)</sub></b>	<b>R<sub>DS(on)</sub></b>		
30V max	±20V max	2.0mΩ @ 10V	2.6mΩ @ 4.5V		
<b>Q<sub>g tot</sub></b>	<b>Q<sub>gd</sub></b>	<b>Q<sub>gs2</sub></b>	<b>Q<sub>rr</sub></b>	<b>Q<sub>oss</sub></b>	<b>V<sub>gs(th)</sub></b>
37nC	12nC	3.3nC	16nC	23nC	1.7V

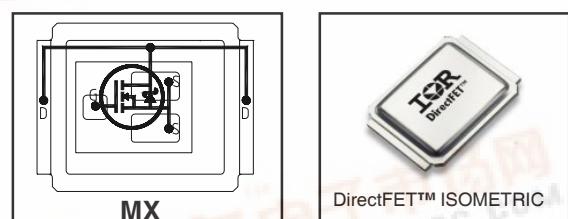

Applicable DirectFET Outline and Substrate Outline (see p.7,8 for details)①

SQ	SX	ST		MQ	MX	MT					
----	----	----	--	----	----	----	--	--	--	--	--


## Description

The IRF6611 combines the latest HEXFET® power MOSFET silicon technology with advanced DirectFET™ packaging to achieve the lowest on-state resistance in a package that has the footprint of an SO-8 and only 0.7 mm profile. The DirectFET package is compatible with existing layout geometries used in power applications, PCB assembly equipment and vapor phase, infra-red or convection soldering techniques, when application note AN-1035 is followed regarding the manufacturing methods and processes. The DirectFET package allows dual sided cooling to maximize thermal transfer in power systems, IMPROVING previous best thermal resistance by 80%.


The IRF6611 balances both low resistance and low charge along with ultra low package inductance to reduce both conduction and switching losses. The reduced total losses make this product ideal for high efficiency DC-DC converters that power the latest generation of processors operating at higher frequencies. The IRF6611 has been optimized for parameters that are critical in synchronous buck operating from 12 volt bus converters including  $R_{DS(on)}$ , gate charge and  $Cdv/dt$ -induced turn on immunity. The IRF6611 offers particularly low  $R_{DS(on)}$  and high  $Cdv/dt$  immunity for synchronous FET applications.

## Absolute Maximum Ratings

	Parameter	Max.	Units
$V_{DS}$	Drain-to-Source Voltage	30	V
$V_{GS}$	Gate-to-Source Voltage	$\pm 20$	
$I_D @ T_A = 25^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10\text{V}$ ⑥	27	A
$I_D @ T_A = 70^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10\text{V}$ ⑥	22	
$I_D @ T_C = 25^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10\text{V}$ ⑨	150	
$I_{DM}$	Pulsed Drain Current ③	220	
$E_{AS}$	Single Pulse Avalanche Energy ④	210	mJ
$I_{AR}$	Avalanche Current ③	22	A

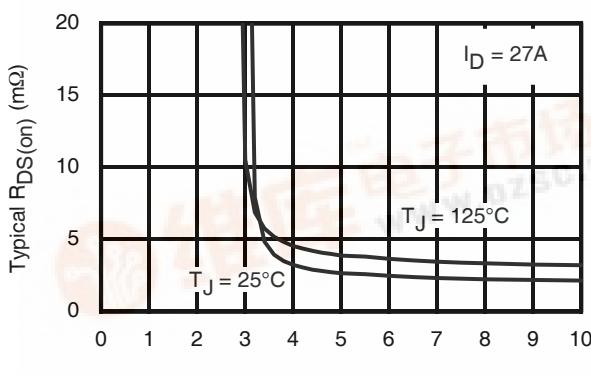

$V_{GS}$ , Gate -to -Source Voltage (V)

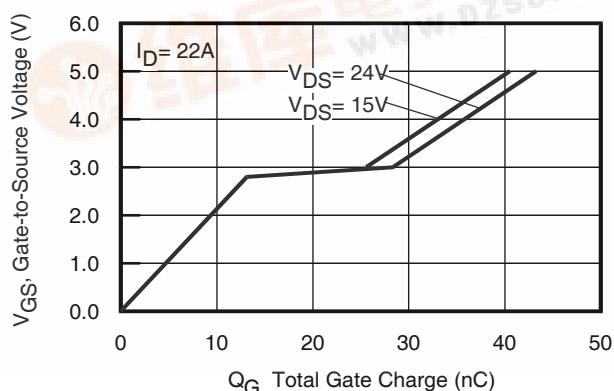


**Fig 2.** Typical On-Resistance vs. Gate Voltage

**Static @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

	Parameter	Min.	Typ.	Max.	Units	Conditions
$\text{BV}_{\text{DSS}}$	Drain-to-Source Breakdown Voltage	30	—	—	V	$\text{V}_{\text{GS}} = 0\text{V}, \text{I}_D = 250\mu\text{A}$
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	23	—	mV/°C	Reference to $25^\circ\text{C}, \text{I}_D = 1\text{mA}$
$R_{\text{DS(on)}}$	Static Drain-to-Source On-Resistance	—	2.0	2.6	$\text{m}\Omega$	$\text{V}_{\text{GS}} = 10\text{V}, \text{I}_D = 27\text{A}$ ⑤
		—	2.6	3.4		$\text{V}_{\text{GS}} = 4.5\text{V}, \text{I}_D = 22\text{A}$ ⑤
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	1.35	—	2.25	V	$\text{V}_{\text{DS}} = \text{V}_{\text{GS}}, \text{I}_D = 250\mu\text{A}$
$\Delta \text{V}_{\text{GS(th)}}/\Delta T_J$	Gate Threshold Voltage Coefficient	—	-6.7	—	mV/°C	
$\text{I}_{\text{DSS}}$	Drain-to-Source Leakage Current	—	—	1.0	$\mu\text{A}$	$\text{V}_{\text{DS}} = 24\text{V}, \text{V}_{\text{GS}} = 0\text{V}$
		—	—	150		$\text{V}_{\text{DS}} = 24\text{V}, \text{V}_{\text{GS}} = 0\text{V}, T_J = 125^\circ\text{C}$
$\text{I}_{\text{GSS}}$	Gate-to-Source Forward Leakage	—	—	100	nA	$\text{V}_{\text{GS}} = 20\text{V}$
	Gate-to-Source Reverse Leakage	—	—	-100		$\text{V}_{\text{GS}} = -20\text{V}$
$\text{gfs}$	Forward Transconductance	100	—	—	S	$\text{V}_{\text{DS}} = 15\text{V}, \text{I}_D = 22\text{A}$
$\text{Q}_g$	Total Gate Charge	—	37	56	nC	$\text{V}_{\text{DS}} = 15\text{V}$ $\text{V}_{\text{GS}} = 4.5\text{V}$ $\text{I}_D = 22\text{A}$ See Fig. 17
$\text{Q}_{\text{gs}1}$	Pre-Vth Gate-to-Source Charge	—	9.8	—		
$\text{Q}_{\text{gs}2}$	Post-Vth Gate-to-Source Charge	—	3.3	—		
$\text{Q}_{\text{gd}}$	Gate-to-Drain Charge	—	12.5	—		
$\text{Q}_{\text{godr}}$	Gate Charge Overdrive	—	11.4	—		
$\text{Q}_{\text{sw}}$	Switch Charge ( $\text{Q}_{\text{gs}2} + \text{Q}_{\text{gd}}$ )	—	15.8	—	ns	$\text{V}_{\text{DS}} = 16\text{V}, \text{V}_{\text{GS}} = 0\text{V}$ $\text{V}_{\text{DD}} = 16\text{V}, \text{V}_{\text{GS}} = 4.5\text{V}$ ⑤ $\text{I}_D = 22\text{A}$ Clamped Inductive Load
$\text{Q}_{\text{oss}}$	Output Charge	—	23	—		
$\text{R}_G$	Gate Resistance	—	—	2.3		
$t_{\text{d(on)}}$	Turn-On Delay Time	—	18	—		
$t_r$	Rise Time	—	57	—		
$t_{\text{d(off)}}$	Turn-Off Delay Time	—	24	—	pF	$\text{V}_{\text{GS}} = 0\text{V}$ $\text{V}_{\text{DS}} = 15\text{V}$ $f = 1.0\text{MHz}$
$t_f$	Fall Time	—	6.5	—		
$C_{\text{iss}}$	Input Capacitance	—	4860	—		
$C_{\text{oss}}$	Output Capacitance	—	1030	—	ns	$\text{V}_{\text{GS}} = 0\text{V}$ $\text{V}_{\text{DS}} = 15\text{V}$ $f = 1.0\text{MHz}$
$C_{\text{rss}}$	Reverse Transfer Capacitance	—	480	—		

**Diode Characteristics**

	Parameter	Min.	Typ.	Max.	Units	Conditions
$I_s$	Continuous Source Current (Body Diode)	—	—	3.5	A	MOSFET symbol showing the integral reverse p-n junction diode.
	Pulsed Source Current (Body Diode) ③	—	—	220		
$V_{\text{SD}}$	Diode Forward Voltage	—	—	1.0	V	$T_J = 25^\circ\text{C}, I_s = 22\text{A}, V_{\text{GS}} = 0\text{V}$ ⑤
$t_{\text{rr}}$	Reverse Recovery Time	—	24	36	ns	$T_J = 25^\circ\text{C}, I_F = 22\text{A}$
$Q_{\text{rr}}$	Reverse Recovery Charge	—	16	24	nC	$di/dt = 100\text{A}/\mu\text{s}$ ⑤

**Notes:**

③ Repetitive rating; pulse width limited by max. junction temperature.

⑤ Pulse width  $\leq 400\mu\text{s}$ ; duty cycle  $\leq 2\%$ .

### Absolute Maximum Ratings

	Parameter	Max.	Units
P <sub>D</sub> @ T <sub>A</sub> = 25°C	Power Dissipation ⑥	2.8	W
P <sub>D</sub> @ T <sub>A</sub> = 70°C	Power Dissipation ⑥	1.8	
P <sub>D</sub> @ T <sub>C</sub> = 25°C	Power Dissipation ⑨	89	
T <sub>P</sub>	Peak Soldering Temperature	270	°C
T <sub>J</sub> T <sub>STG</sub>	Operating Junction and Storage Temperature Range	-40 to + 150	

### Thermal Resistance

	Parameter	Typ.	Max.	Units
R <sub>0JA</sub>	Junction-to-Ambient ⑥⑩	—	45	°C/W
R <sub>0JA</sub>	Junction-to-Ambient ⑦⑩	12.5	—	
R <sub>0JA</sub>	Junction-to-Ambient ⑧⑩	20	—	
R <sub>0JC</sub>	Junction-to-Case ⑨⑩	—	1.4	
R <sub>0J-PCB</sub>	Junction-to-PCB Mounted	1.0	—	
	Linear Derating Factor ⑤	0.022		W/°C


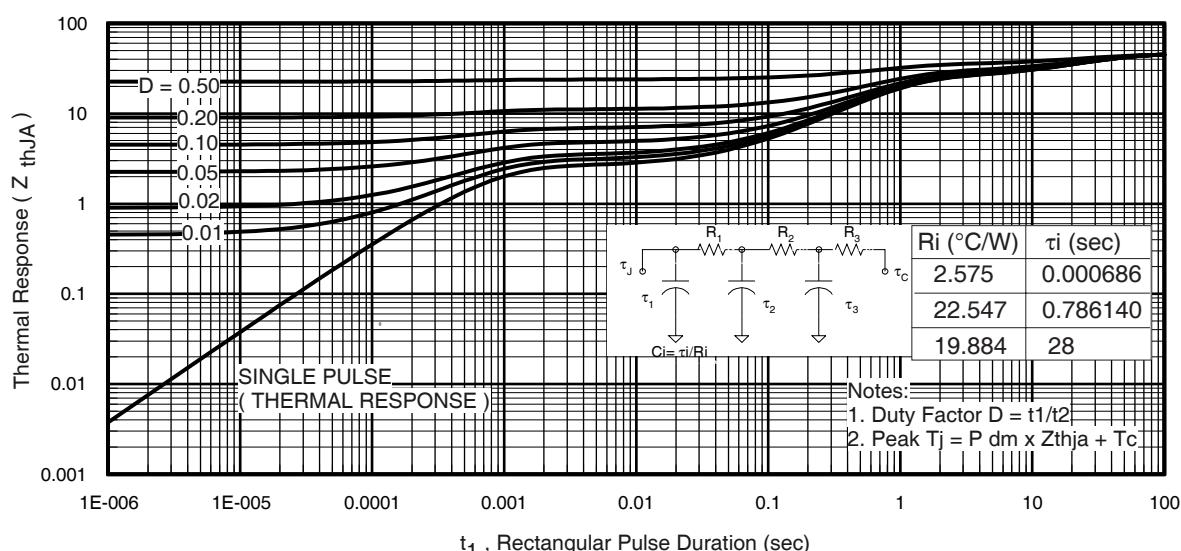


Fig 3. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient


#### Notes:

- ⑥ Surface mounted on 1 in. square Cu board, steady state.
- ⑦ Used double sided cooling, mounting pad.
- ⑧ Mounted on minimum footprint full size board with metalized back and with small clip heatsink.


⑨ T<sub>C</sub> measured with thermocouple in contact with top (Drain) of part.  
⑩ R<sub>0</sub> is measured at T<sub>j</sub> of approximately 90°C.

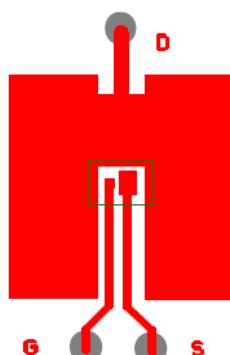

⑥ Surface mounted on 1 in. square Cu board (still air).

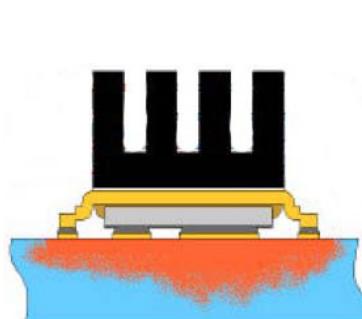


⑦ Mounted to a PCB with a thin gap filler and heat sink. (still air)




⑧ Mounted on minimum footprint full size board with metalized back and with small clip heatsink (still air)

# IRF6611


International  
Rectifier

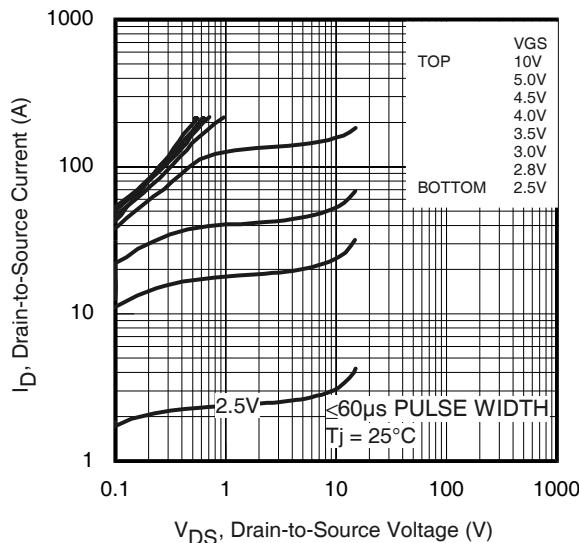


**Fig 4.** Typical Output Characteristics

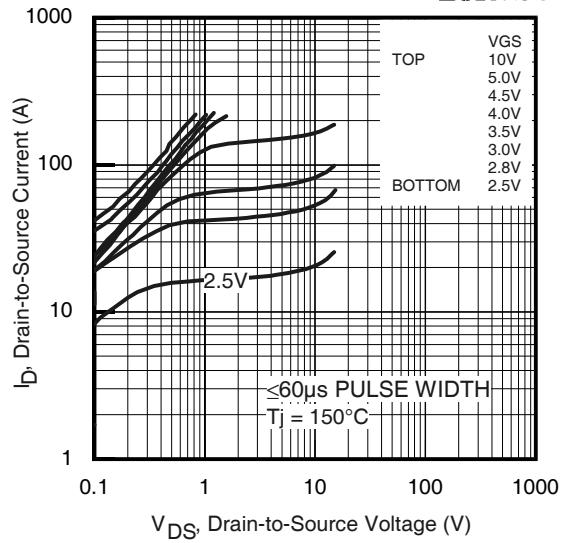


**Fig 5.** Typical Output Characteristics

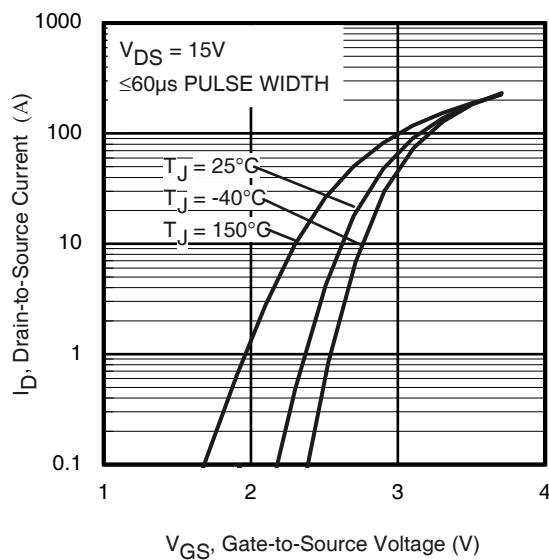


**Fig 6.** Typical Transfer Characteristics

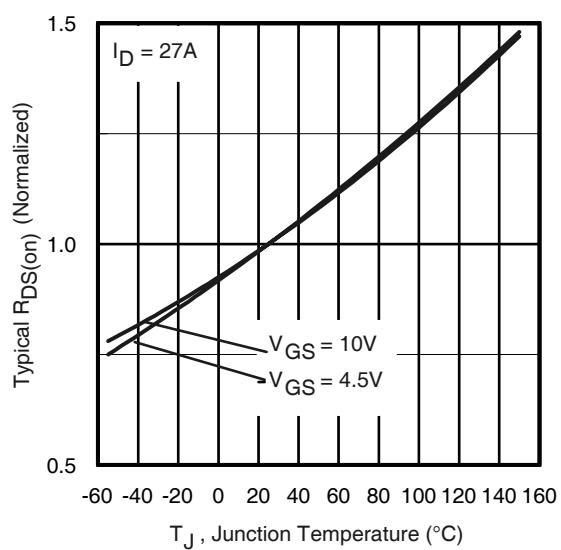


**Fig 7.** Normalized On-Resistance vs. Temperature

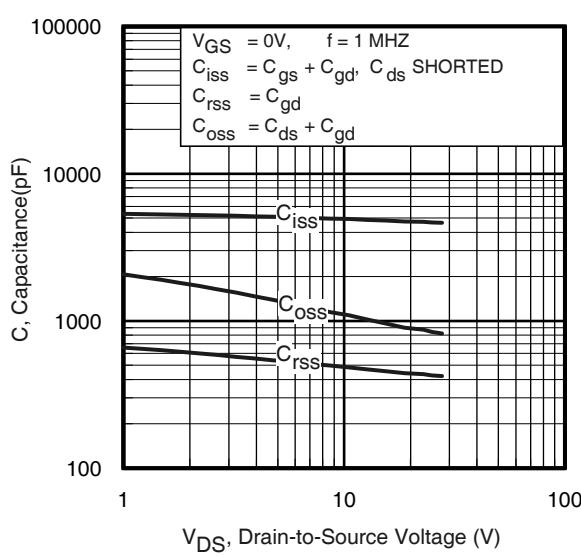


**Fig 8.** Typical Capacitance vs. Drain-to-Source Voltage

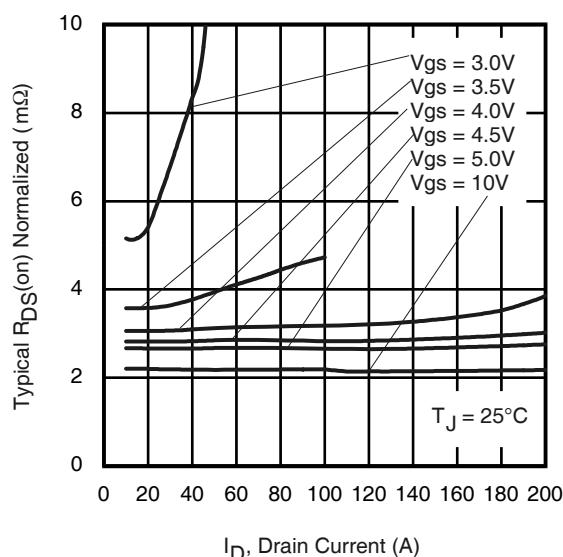


**Fig 9.** Normalized Typical On-Resistance vs. Drain Current and Gate Voltage

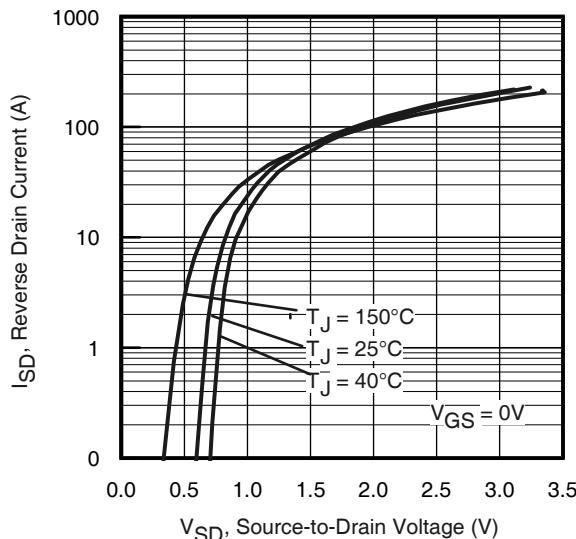


**Fig 10.** Typical Source-Drain Diode Forward Voltage

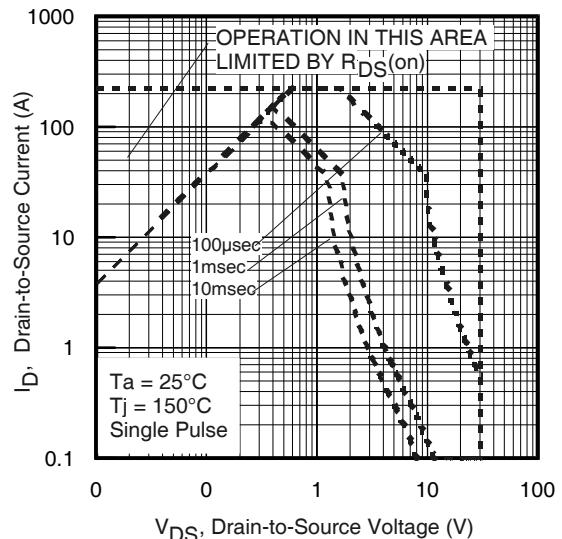


**Fig 11.** Maximum Safe Operating Area

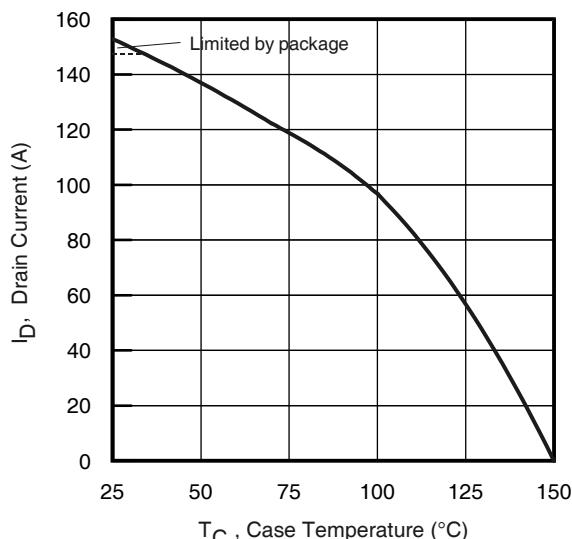

**Fig 12.** Maximum Drain Current vs. Case Temperature

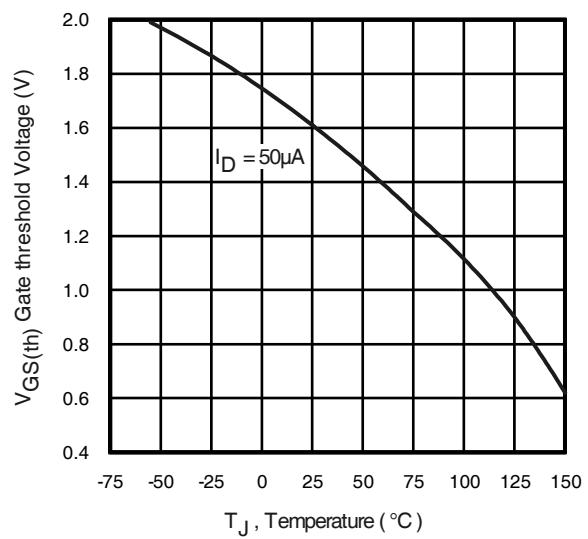


**Fig 13.** Threshold Voltage vs. Temperature

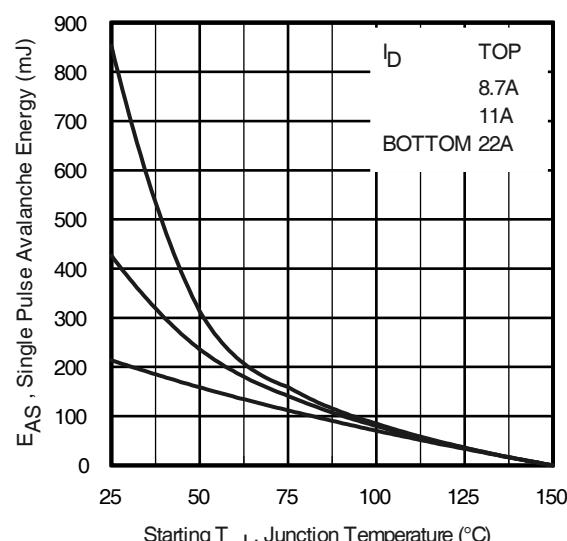


**Fig 14.** Maximum Avalanche Energy vs. Drain Current

# IRF6611


International  
**IR** Rectifier

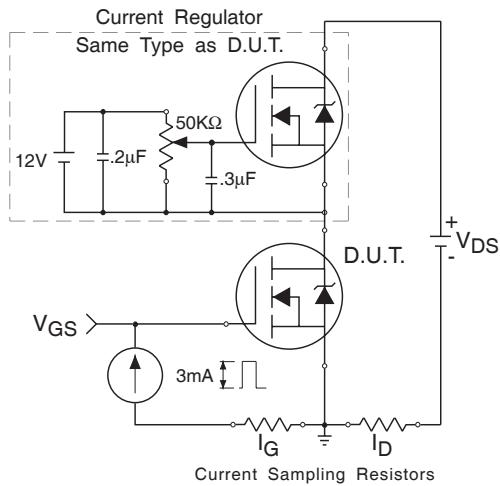


**Fig 15a.** Gate Charge Test Circuit

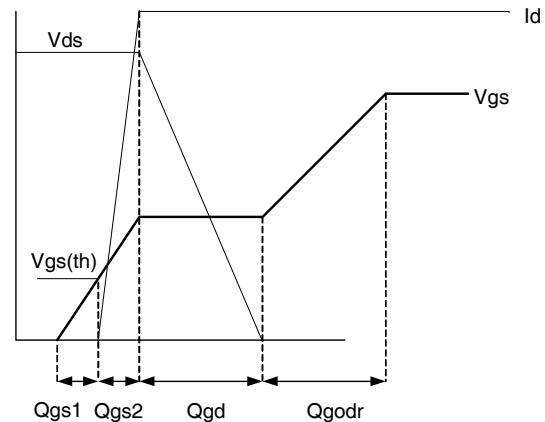


**Fig 15b.** Gate Charge Waveform

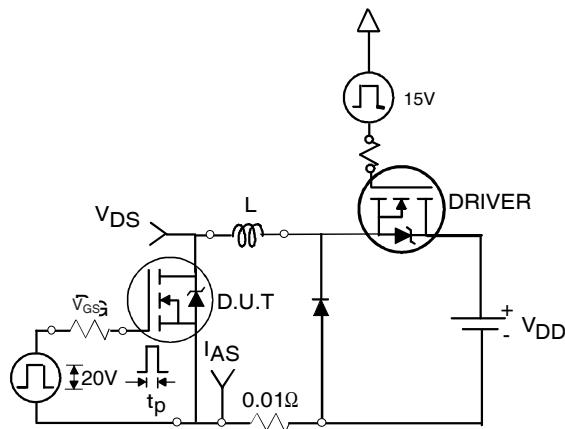


**Fig 16b.** Unclamped Inductive Test Circuit

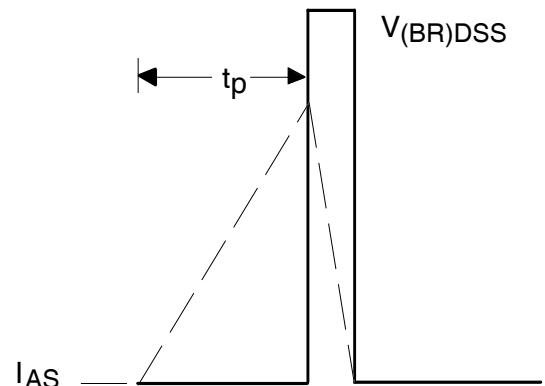


**Fig 16c.** Unclamped Inductive Waveforms

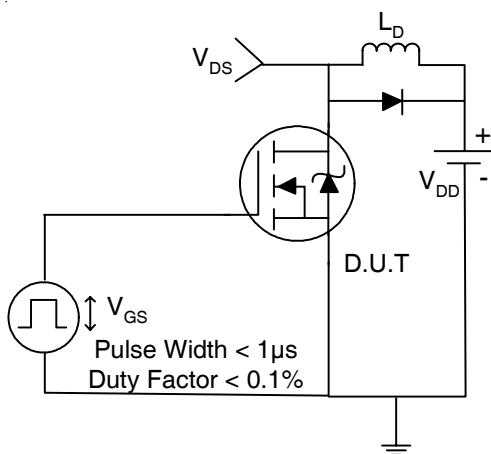

**Fig 17a.** Switching Time Test Circuit

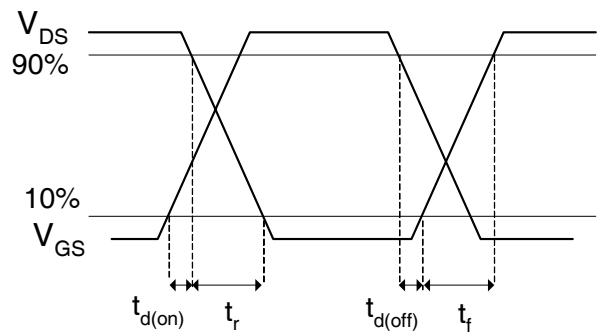



**Fig 17b.** Switching Time Waveforms

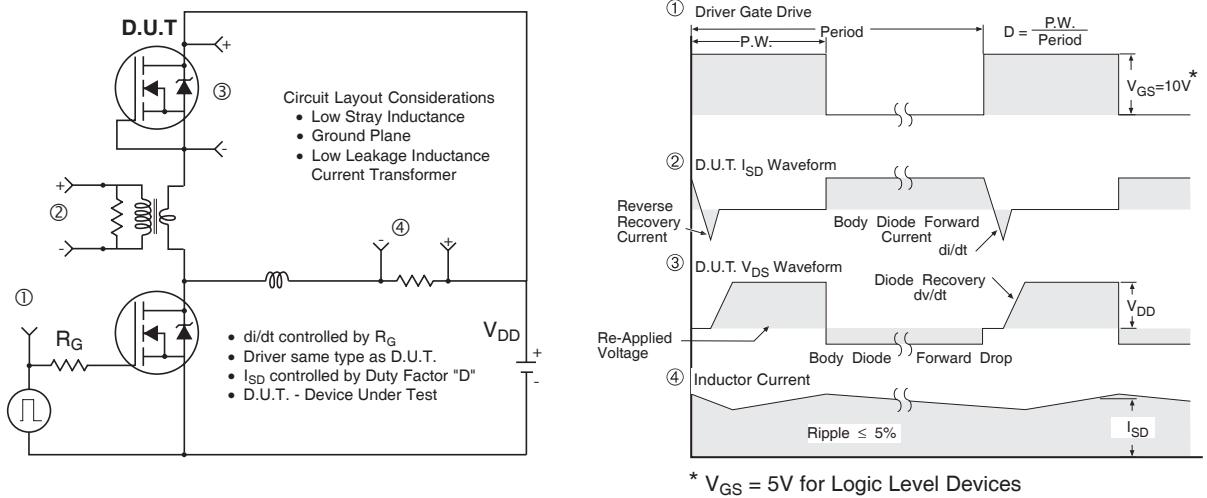

**Fig 18.** Diode Reverse Recovery Test Circuit for N-Channel HEXFET® Power MOSFETs

### DirectFET™ Substrate and PCB Layout, MX Outline ③ (Medium Size Can, X-Designation).

Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET. This includes all recommendations for stencil and substrate designs.

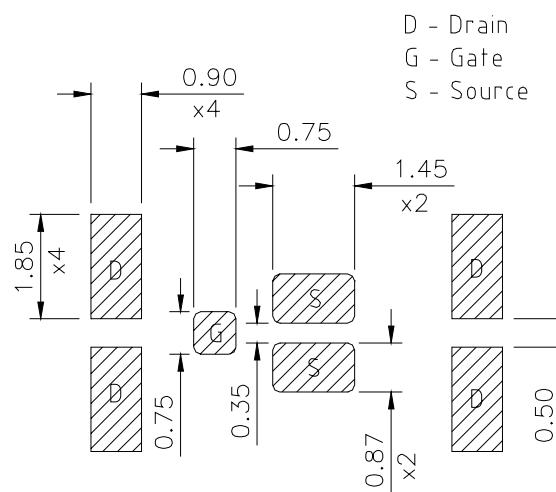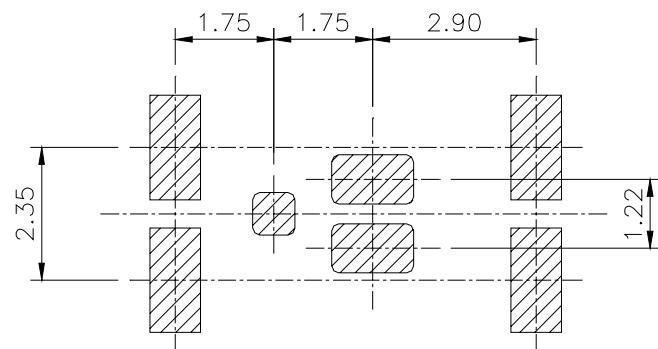


# IRF6611

International  
**IR** Rectifier


## DirectFET™ Outline Dimension, MX Outline (Medium Size Can, X-Designation).


Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET.

This includes all recommendations for stencil and substrate designs.

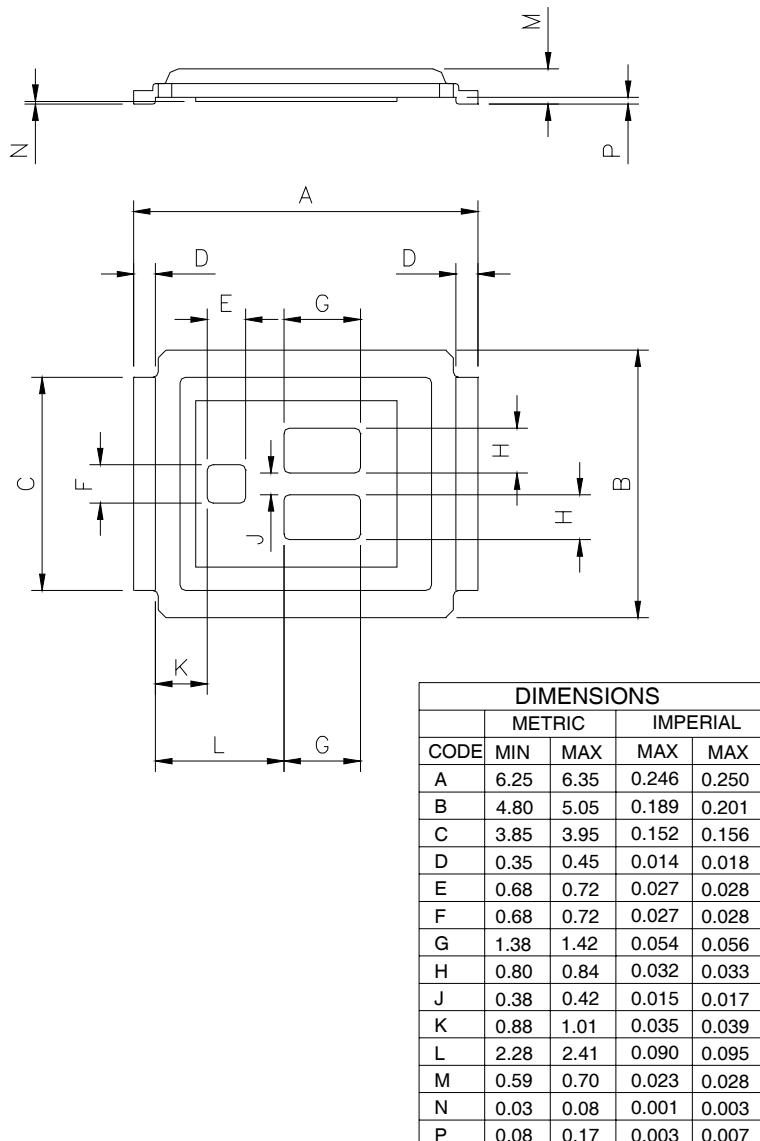

## DirectFET™ Part Marking

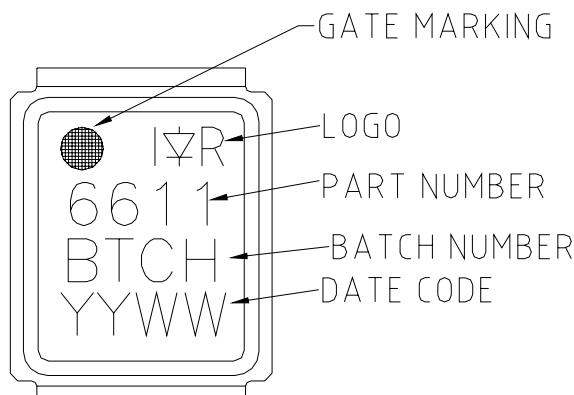


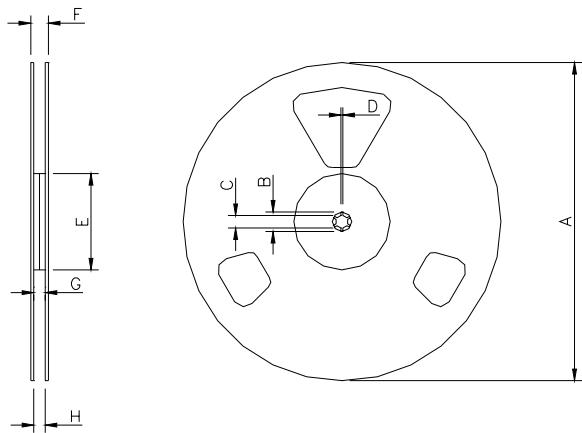

NOTE: Controlling dimensions in mm  
Std reel quantity is 4800 parts. (ordered as IRF6611). For 1000 parts on 7" reel,  
order IRF6611TR1

REEL DIMENSIONS								
STANDARD OPTION (QTY 4800)				TR1 OPTION (QTY 1000)				
CODE	METRIC	MIN	MAX	IMPERIAL	METRIC	MIN	MAX	
A	330.0	N.C.	12.992	N.C.	177.77	N.C.	6.9	N.C.
B	20.2	N.C.	0.795	N.C.	19.06	N.C.	0.75	N.C.
C	12.8	13.2	0.504	0.520	13.5	12.8	0.53	0.50
D	1.5	N.C.	0.059	N.C.	1.5	N.C.	0.059	N.C.
E	100.0	N.C.	3.937	N.C.	58.72	N.C.	2.31	N.C.
F	N.C.	18.4	N.C.	0.724	N.C.	13.50	N.C.	0.53
G	12.4	14.4	0.488	0.567	11.9	12.01	0.47	N.C.
H	11.9	15.4	0.469	0.606	11.9	12.01	0.47	N.C.

LOADED TAPE FEED DIRECTION

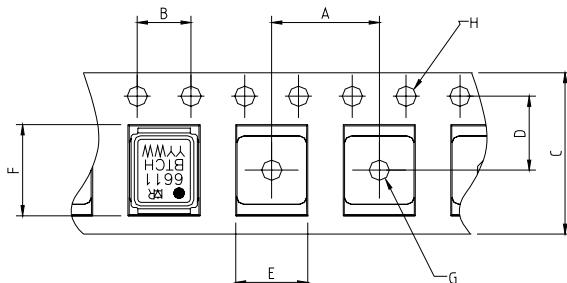

NOTE: CONTROLLING  
DIMENSIONS IN MM

DIMENSIONS				
	METRIC	MIN	MAX	
CODE				
A	7.90	8.10	0.311	0.319
B	3.90	4.10	0.154	0.161
C	11.90	12.30	0.469	0.484
D	5.45	5.55	0.215	0.219
E	5.10	5.30	0.201	0.209
F	6.50	6.70	0.256	0.264
G	1.50	N.C.	0.059	N.C.
H	1.50	1.60	0.059	0.063

Data and specifications subject to change without notice.  
This product has been designed and qualified for the Consumer market.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

TAC Fax: (310) 252-7903

Visit us at [www.irf.com](http://www.irf.com) for sales contact information.04/05