

# International Rectifier


- RoHS Compliant Containing No Lead and Bromide ①
- Low Profile (<0.7 mm)
- Dual Sided Cooling Compatible ①
- Ultra Low Package Inductance
- Optimized for High Frequency Switching ①
- Ideal for High Performance Isolated Converter Primary Switch Socket
- Optimized for Synchronous Rectification
- Low Conduction Losses
- Compatible with existing Surface Mount Techniques ①

## IRF6645

DirectFET™ Power MOSFET ②

Typical values (unless otherwise specified)

$V_{DSS}$	$V_{GS}$	$R_{DS(on)}$
100V max	$\pm 20V$ max	28mΩ @ 10V
$Q_g \text{ tot}$	$Q_{gd}$	$V_{gs(\text{th})}$
14nC	4.8nC	4.0V



Applicable DirectFET Outline and Substrate Outline (see p.7,8 for details) ①

SH	SJ	SP	MZ	MN				

### Description

The IRF6645 combines the latest HEXFET® Power MOSFET Silicon technology with the advanced DirectFET™ packaging to achieve the lowest on-state resistance in a package that has the footprint of a Micro8 and only 0.7 mm profile. The DirectFET package is compatible with existing layout geometries used in power applications, PCB assembly equipment and vapor phase, infra-red or convection soldering techniques, when application note AN-1035 is followed regarding the manufacturing methods and processes. The DirectFET package allows dual sided cooling to maximize thermal transfer in power systems, improving previous best thermal resistance by 80%.

The IRF6645 is optimized for primary side bridge topologies in isolated DC-DC applications, for wide range universal input Telecom applications (36V - 75V), and for secondary side synchronous rectification in regulated DC-DC topologies. The reduced total losses in the device coupled with the high level of thermal performance enables high efficiency and low temperatures, which are key for system reliability improvements, and makes this device ideal for high performance isolated DC-DC converters.

### Absolute Maximum Ratings

	Parameter	Max.	Units
$V_{DS}$	Drain-to-Source Voltage	100	V
$V_{GS}$	Gate-to-Source Voltage	$\pm 20$	
$I_D @ T_A = 25^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10V$ ③	5.7	A
$I_D @ T_A = 70^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10V$ ③	4.5	
$I_D @ T_C = 25^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10V$ ④	25	
$I_{DM}$	Pulsed Drain Current ⑤	45	
$E_{AS}$	Single Pulse Avalanche Energy ⑥	29	mJ
$I_{AR}$	Avalanche Current ⑤	3.4	A

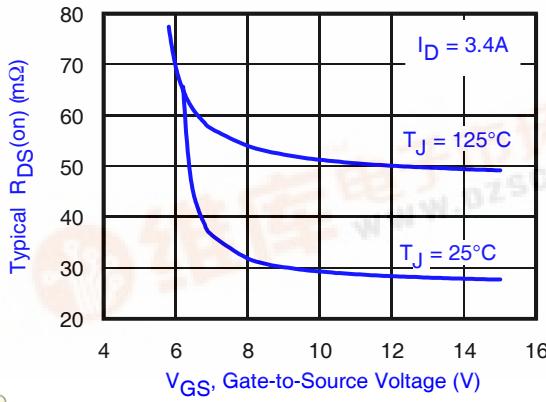


Fig 1. Typical On-Resistance vs. Gate Voltage

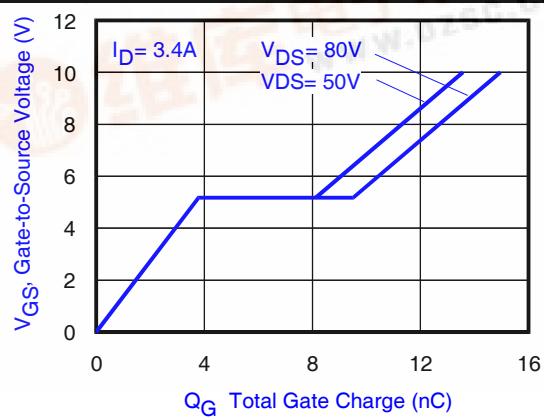


Fig 2. Typical Total Gate Charge vs. Gate-to-Source Voltage

④  $T_C$  measured with thermocouple mounted to top (Drain) of part.

⑤ Repetitive rating; pulse width limited by max. junction temperature.

⑥ Starting  $T_J = 25^\circ\text{C}$ ,  $L = 5.0\text{mH}$ ,  $R_G = 25\Omega$ ,  $I_{AS} = 3.4\text{A}$ .

① Click on this section to link to the appropriate technical paper.

② Click on this section to link to the DirectFET Website.


③ Surface mounted on 1 in. square Cu board, steady state.

**Electrical Characteristic @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

	Parameter	Min.	Typ.	Max.	Units	Conditions
$\text{BV}_{\text{DSS}}$	Drain-to-Source Breakdown Voltage	100	—	—	V	$\text{V}_{\text{GS}} = 0\text{V}, \text{I}_D = 250\mu\text{A}$
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	0.12	—	V/ $^\circ\text{C}$	Reference to $25^\circ\text{C}, \text{I}_D = 1\text{mA}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source On-Resistance	—	28	35	$\text{m}\Omega$	$\text{V}_{\text{GS}} = 10\text{V}, \text{I}_D = 5.7\text{A}$ ①
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	3.0	—	4.9	V	$\text{V}_{\text{DS}} = \text{V}_{\text{GS}}, \text{I}_D = 50\mu\text{A}$
$\Delta \text{V}_{\text{GS(th)}}/\Delta T_J$	Gate Threshold Voltage Coefficient	—	-12	—	$\text{mV}/^\circ\text{C}$	
$\text{I}_{\text{DSS}}$	Drain-to-Source Leakage Current	—	—	20	$\mu\text{A}$	$\text{V}_{\text{DS}} = 100\text{V}, \text{V}_{\text{GS}} = 0\text{V}$
		—	—	250		$\text{V}_{\text{DS}} = 80\text{V}, \text{V}_{\text{GS}} = 0\text{V}, T_J = 125^\circ\text{C}$
$\text{I}_{\text{GSS}}$	Gate-to-Source Forward Leakage	—	—	100	nA	$\text{V}_{\text{GS}} = 20\text{V}$
	Gate-to-Source Reverse Leakage	—	—	-100		$\text{V}_{\text{GS}} = -20\text{V}$
$\text{g}_{\text{fs}}$	Forward Transconductance	7.4	—	—	S	$\text{V}_{\text{DS}} = 10\text{V}, \text{I}_D = 3.4\text{A}$
$\text{Q}_{\text{g}}$	Total Gate Charge	—	14	20	nC	$\text{V}_{\text{DS}} = 50\text{V}$ $\text{V}_{\text{GS}} = 10\text{V}$ $\text{I}_D = 3.4\text{A}$ See Fig. 15
$\text{Q}_{\text{gs1}}$	Pre-V <sub>th</sub> Gate-to-Source Charge	—	3.1	—		
$\text{Q}_{\text{gs2}}$	Post-V <sub>th</sub> Gate-to-Source Charge	—	0.8	—		
$\text{Q}_{\text{gd}}$	Gate-to-Drain Charge	—	4.8	7.2		
$\text{Q}_{\text{godr}}$	Gate Charge Overdrive	—	5.3	—		
$\text{Q}_{\text{sw}}$	Switch Charge ( $\text{Q}_{\text{gs2}} + \text{Q}_{\text{gd}}$ )	—	5.6	—	nC	$\text{V}_{\text{DS}} = 16\text{V}, \text{V}_{\text{GS}} = 0\text{V}$
$\text{Q}_{\text{oss}}$	Output Charge	—	7.2	—		
$\text{R}_{\text{G}}$	Gate Resistance	—	1.0	—		
$\text{t}_{\text{d(on)}}$	Turn-On Delay Time	—	9.2	—		$\text{V}_{\text{DD}} = 50\text{V}, \text{V}_{\text{GS}} = 10\text{V}$ ① $\text{I}_D = 3.4\text{A}$ $\text{R}_{\text{G}} = 6.2\Omega$
$\text{t}_r$	Rise Time	—	5.0	—		
$\text{t}_{\text{d(off)}}$	Turn-Off Delay Time	—	18	—		
$\text{t}_f$	Fall Time	—	5.1	—		
$\text{C}_{\text{iss}}$	Input Capacitance	—	890	—	pF	$\text{V}_{\text{GS}} = 0\text{V}$ $\text{V}_{\text{DS}} = 25\text{V}$ $f = 1.0\text{MHz}$ $\text{V}_{\text{GS}} = 0\text{V}, \text{V}_{\text{DS}} = 1.0\text{V}, f=1.0\text{MHz}$ $\text{V}_{\text{GS}} = 0\text{V}, \text{V}_{\text{DS}} = 80\text{V}, f=1.0\text{MHz}$
$\text{C}_{\text{oss}}$	Output Capacitance	—	180	—		
$\text{C}_{\text{rss}}$	Reverse Transfer Capacitance	—	40	—		
$\text{C}_{\text{oss}}$	Output Capacitance	—	870	—		
$\text{C}_{\text{oss}}$	Output Capacitance	—	100	—		

**Diode Characteristics**

	Parameter	Min.	Typ.	Max.	Units	Conditions
$\text{I}_S$	Continuous Source Current (Body Diode)	—	—	25	A	MOSFET symbol showing the integral reverse p-n junction diode.
$\text{I}_{\text{SM}}$	Pulsed Source Current (Body Diode) ②	—	—	45		
$\text{V}_{\text{SD}}$	Diode Forward Voltage	—	—	1.3		
$\text{t}_{\text{rr}}$	Reverse Recovery Time	—	31	47	ns	$\text{T}_J = 25^\circ\text{C}, \text{I}_F = 3.4\text{A}, \text{V}_{\text{DD}} = 50\text{V}$
$\text{Q}_{\text{rr}}$	Reverse Recovery Charge	—	40	60		

**Notes:**① Pulse width  $\leq 400\mu\text{s}$ ; duty cycle  $\leq 2\%$ .

② Repetitive rating; pulse width limited by max. junction temperature.

### Absolute Maximum Ratings

	Parameter	Max.	Units
P <sub>D</sub> @ T <sub>A</sub> = 25°C	Power Dissipation ①	3.0	W
P <sub>D</sub> @ T <sub>A</sub> = 70°C	Power Dissipation ①	1.4	
P <sub>D</sub> @ T <sub>C</sub> = 25°C	Power Dissipation ④	42	
T <sub>P</sub>	Peak Soldering Temperature	270	°C
T <sub>J</sub>	Operating Junction and Storage Temperature Range	-40 to + 150	

### Thermal Resistance

	Parameter	Typ.	Max.	Units
R <sub>0JA</sub>	Junction-to-Ambient ①⑤	—	58	°C/W
R <sub>0JA</sub>	Junction-to-Ambient ②⑤	12.5	—	
R <sub>0JA</sub>	Junction-to-Ambient ③⑤	20	—	
R <sub>0JC</sub>	Junction-to-Case ④⑤	—	3.0	
R <sub>0J-PCB</sub>	Junction-to-PCB Mounted	1.0	—	


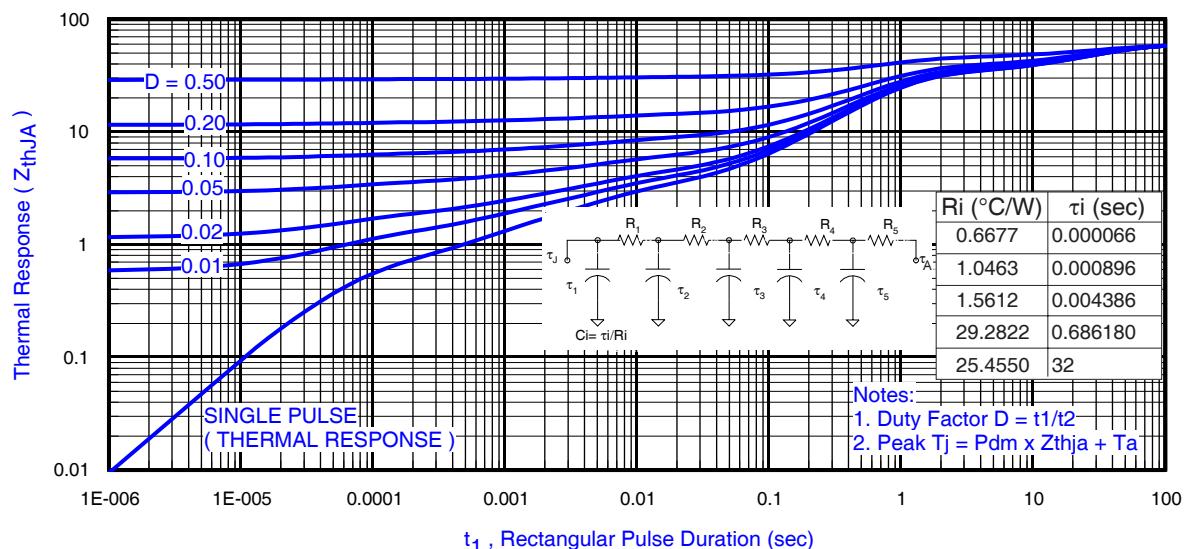


Fig 3. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient ①

#### Notes:

- ① Surface mounted on 1 in. square Cu, steady state.
- ② Used double sided cooling , mounting pad.
- ③ Mounted on minimum footprint full size board with metalized back and with small clip heatsink.

- ④ T<sub>C</sub> measured with thermocouple in contact with top (Drain) of part.
- ⑤ R<sub>0</sub> is measured at T<sub>J</sub> of approximately 90°C.

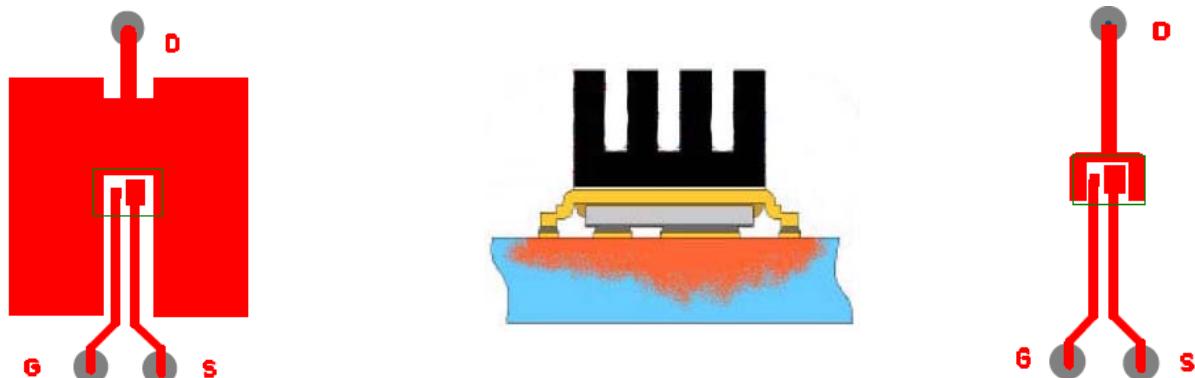


① Surface mounted on 1 in. square Cu board (still air).

③ Mounted to a PCB with small clip heatsink (still air)


③ Mounted on minimum footprint full size board with metalized back and with small clip heatsink (still air)

# IRF6645


International  
Rectifier

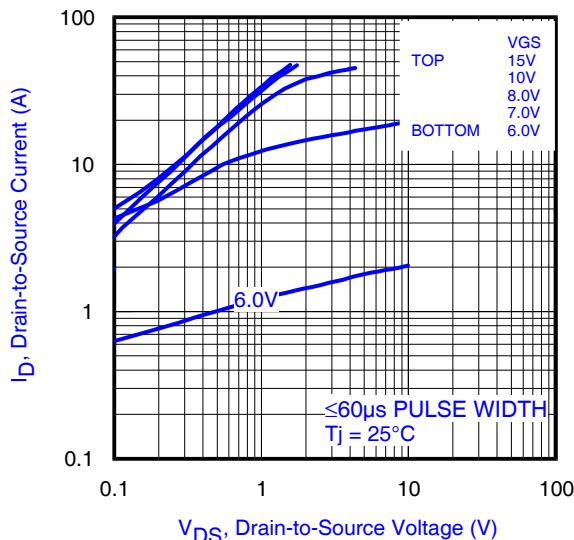


**Fig 4.** Typical Output Characteristics

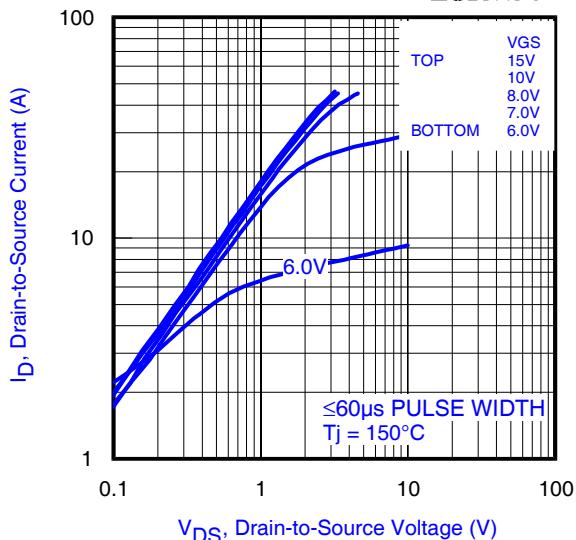


**Fig 5.** Typical Output Characteristics

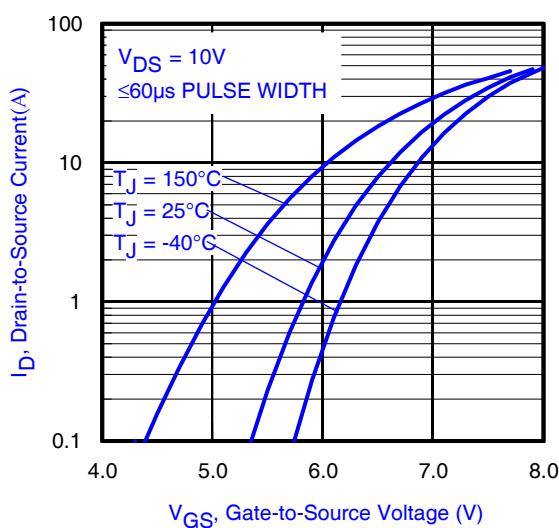


**Fig 6.** Typical Transfer Characteristics

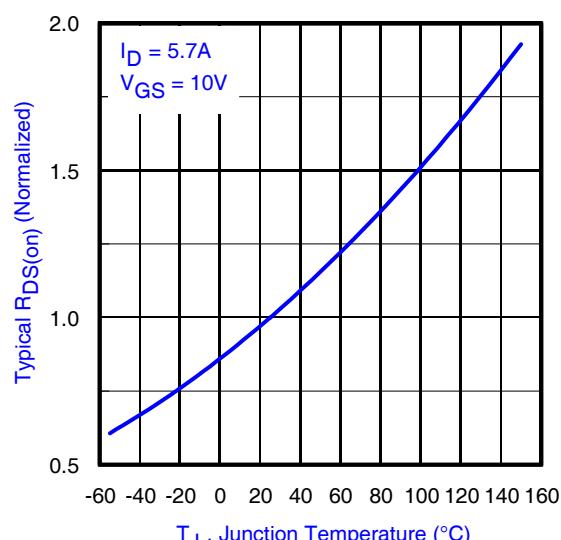


**Fig 7.** Normalized On-Resistance vs. Temperature

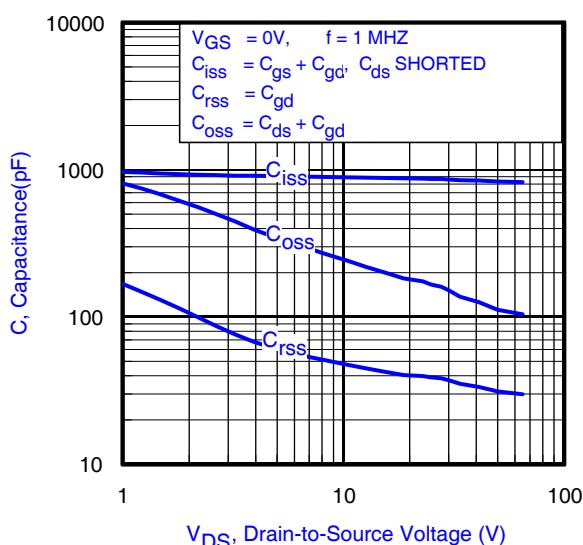


**Fig 8.** Typical Capacitance vs. Drain-to-Source Voltage

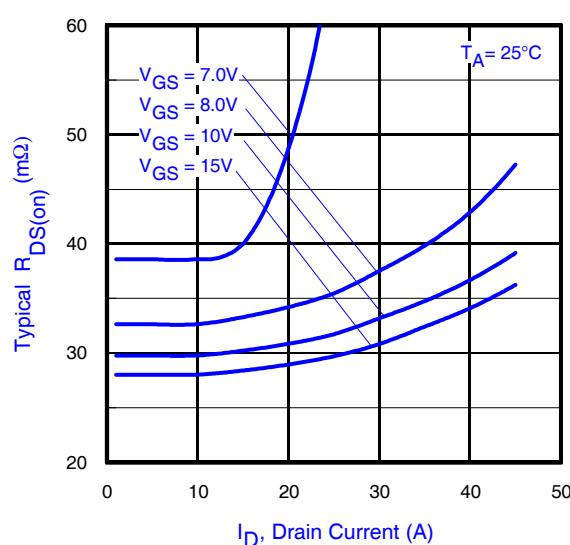


**Fig 9.** Typical On-Resistance vs. Drain Current

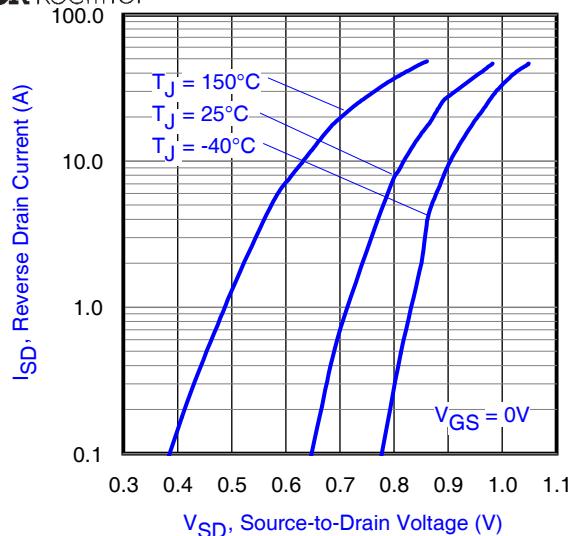


**Fig 10.** Typical Source-Drain Diode Forward Voltage

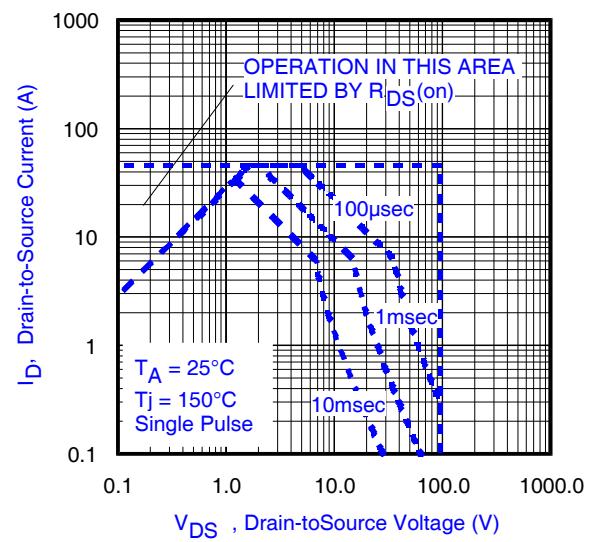


**Fig 11.** Maximum Safe Operating Area

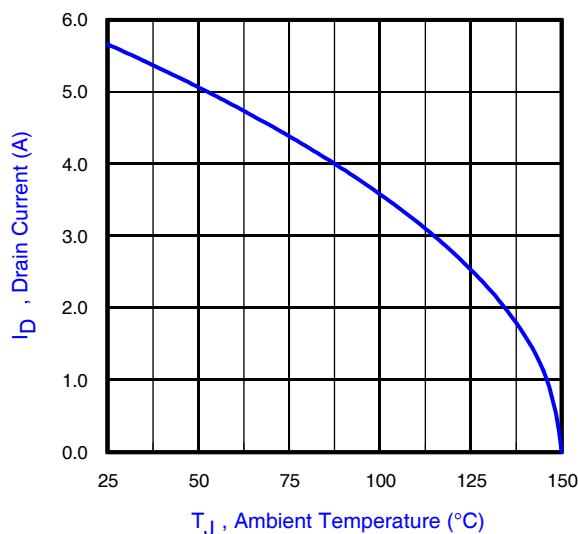

**Fig 12.** Maximum Drain Current vs. Ambient Temperature

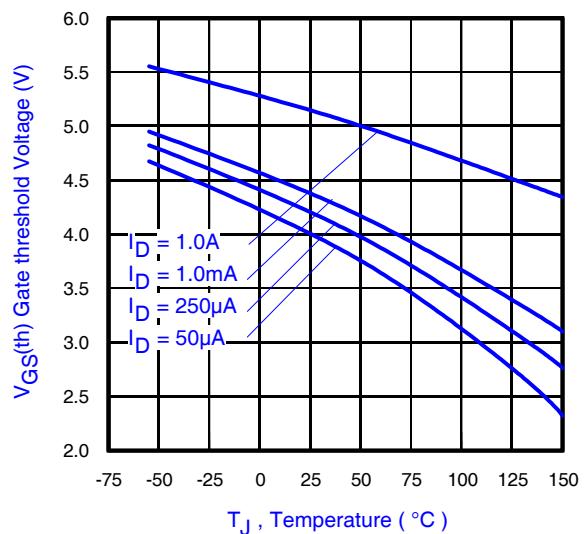


**Fig 13.** Typical Threshold Voltage vs. Junction Temperature

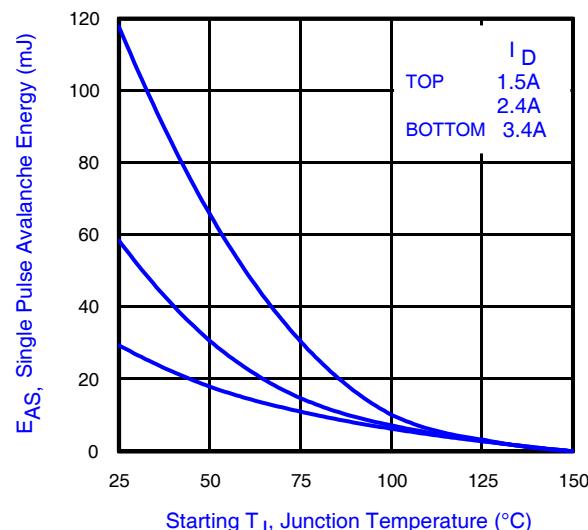


**Fig 14.** Maximum Avalanche Energy vs. Drain Current

# IRF6645


International  
**IR** Rectifier

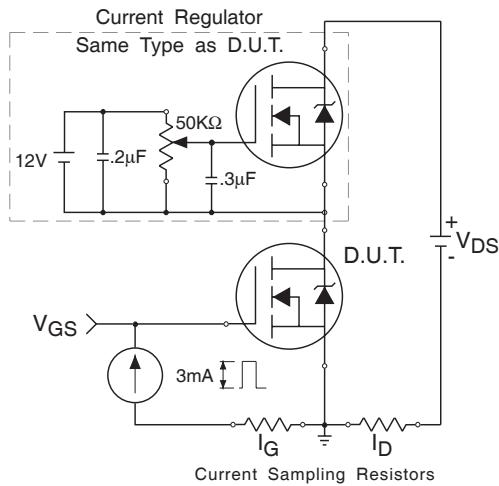


**Fig 15a.** Gate Charge Test Circuit

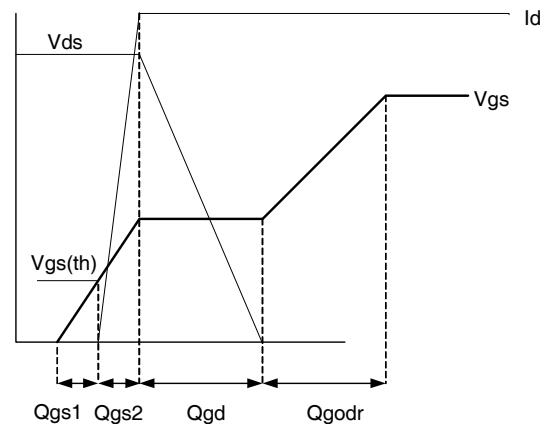


**Fig 15b.** Gate Charge Waveform

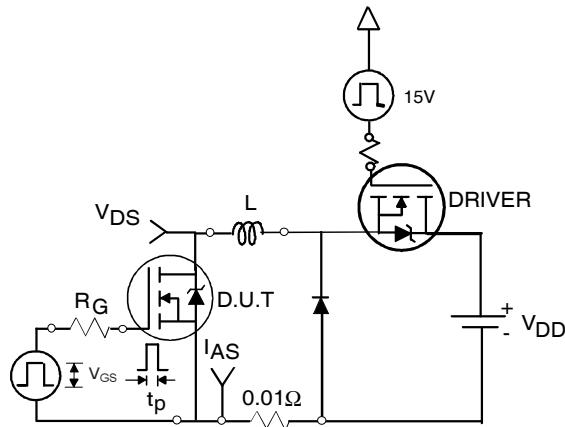


**Fig 16b.** Unclamped Inductive Test Circuit

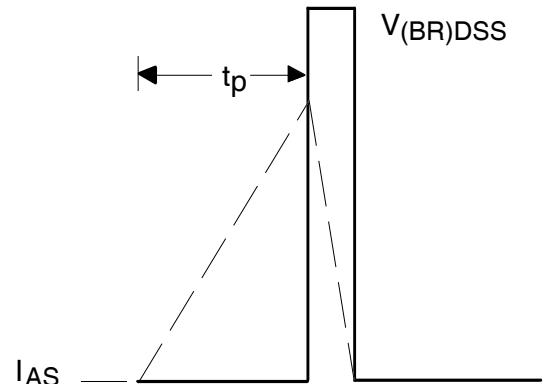


**Fig 16c.** Unclamped Inductive Waveforms

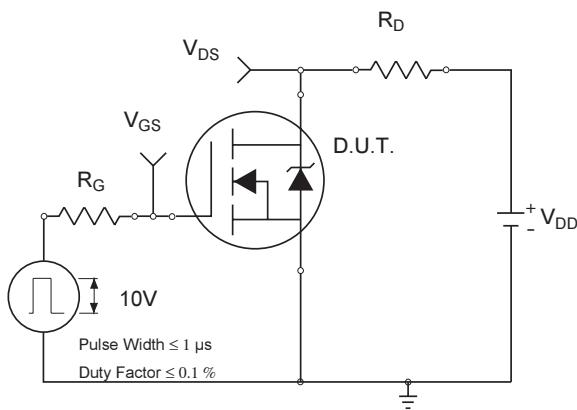

**Fig 17a.** Switching Time Test Circuit

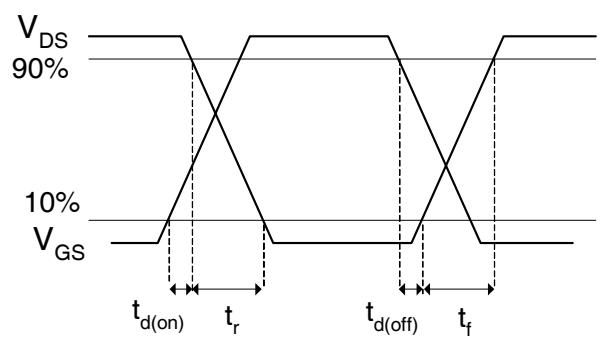


**Fig 17b.** Switching Time Waveforms

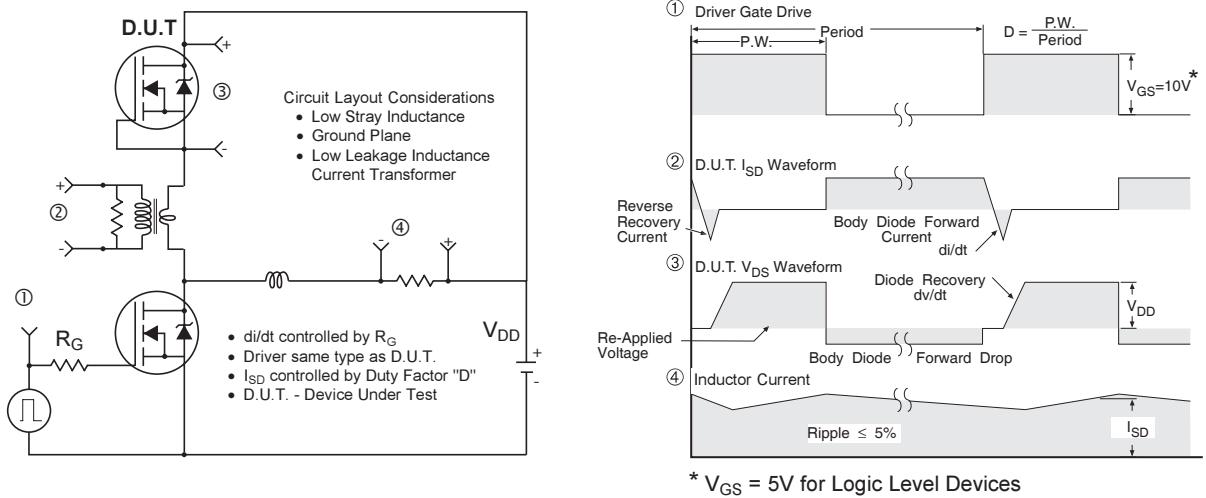

**Fig 18.** Diode Reverse Recovery Test Circuit for N-Channel HEXFET® Power MOSFETs

### DirectFET™ Substrate and PCB Layout, SJ Outline (Small Size Can, J-Designation).

Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET. This includes all recommendations for stencil and substrate designs.

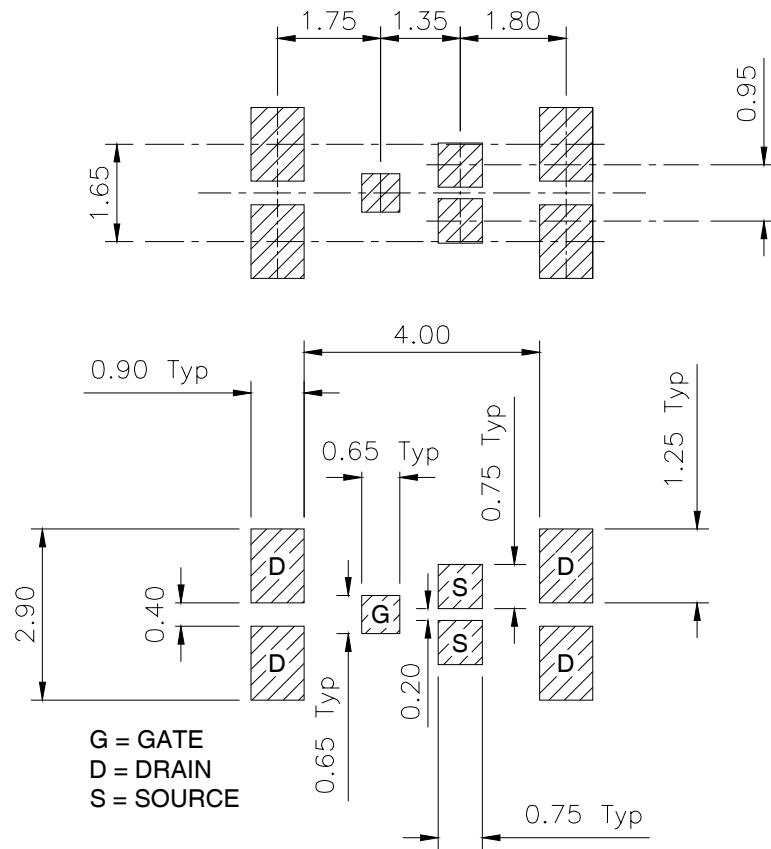


# IRF6645

International  
**IR** Rectifier

## DirectFET™ Outline Dimension, SJ Outline (Small Size Can, J-Designation).


Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET.

This includes all recommendations for stencil and substrate designs.

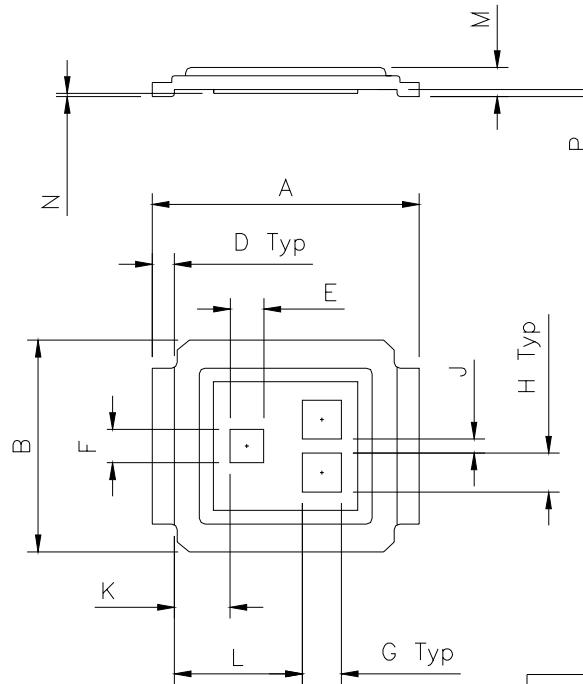


DIMENSIONS				
	METRIC		IMPERIAL	
CODE	MIN	MAX	MIN	MAX
A	4.75	4.85	0.187	0.191
B	3.70	3.95	0.146	0.156
C	2.75	2.85	0.108	0.112
D	0.35	0.45	0.014	0.018
E	0.58	0.62	0.023	0.024
F	0.58	0.62	0.023	0.024
G	0.68	0.72	0.027	0.028
H	0.68	0.72	0.027	0.028
K	0.98	1.02	0.039	0.040
L	2.28	2.32	0.090	0.091
M	0.48	0.58	0.019	0.023
N	0.03	0.08	0.001	0.003
P	0.08	0.17	0.003	0.007

## DirectFET™ Part Marking

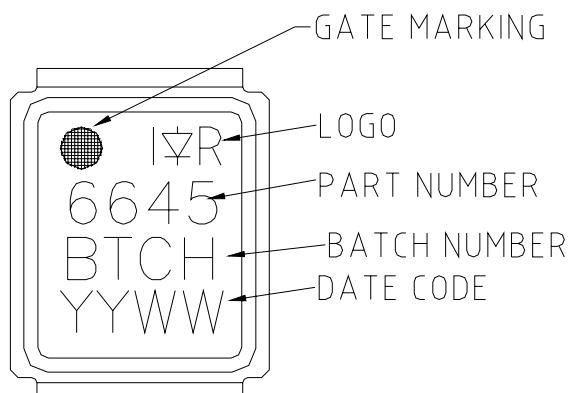


## DirectFET™ Tape & Reel Dimension (Showing component orientation).

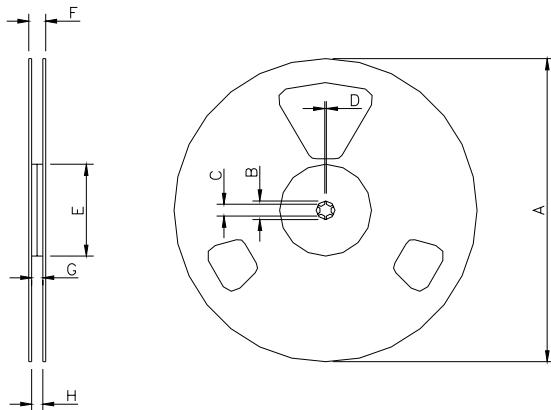

NOTE: Controlling dimensions in mm  
Std reel quantity is 4800 parts. (ordered as IRF6645). For 1000 parts on 7" reel,  
order IRF6645TR1

REEL DIMENSIONS								
CODE	STANDARD OPTION (QTY 4800)		TR1 OPTION (QTY 1000)		METRIC		IMPERIAL	
	METRIC	IMPERIAL	METRIC	IMPERIAL	METRIC	IMPERIAL	METRIC	IMPERIAL
A	330.0	N.C.	12.992	N.C.	177.77	N.C.	6.9	N.C.
B	20.2	N.C.	0.795	N.C.	19.06	N.C.	0.75	N.C.
C	12.8	13.2	0.504	0.520	13.5	12.8	0.53	0.50
D	1.5	N.C.	0.059	N.C.	1.5	N.C.	0.059	N.C.
E	100.0	N.C.	3.937	N.C.	58.72	N.C.	2.31	N.C.
F	N.C.	18.4	N.C.	0.724	N.C.	13.50	N.C.	0.53
G	12.4	14.4	0.488	0.567	11.9	12.01	0.47	N.C.
H	11.9	15.4	0.469	0.606	11.9	12.01	0.47	N.C.

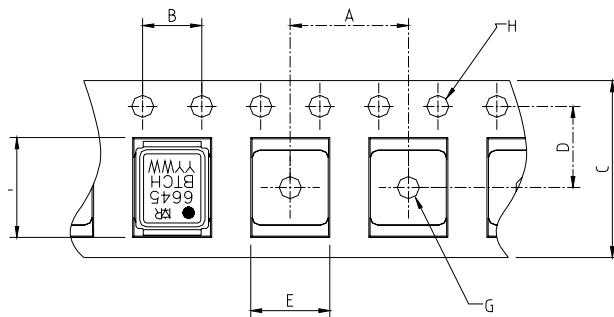

NOTE: CONTROLLING  
DIMENSIONS IN MM

DIMENSIONS		
	METRIC	IMPERIAL
	MIN	MAX
7.90	8.10	0.319
3.90	4.10	0.161
11.90	12.30	0.484
5.45	5.55	0.219
4.00	4.20	0.165
5.00	5.20	0.205
1.50	N.C.	N.C.
1.50	1.60	0.063

Data and specifications subject to change without notice.  
This product has been designed and qualified for the Consumer market.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7903

Visit us at [www.irf.com](http://www.irf.com) for sales contact information.08/05