

FAN4040

Precision Micropower Shunt Voltage Reference

Features

- Fixed 2.500V, 3.300V and 5.00V
- Tolerances to $\pm 0.1\%$ (25°C)
- Low output noise
- Low temperature coefficient to 100ppm/ $^\circ\text{C}$
- Small package
- Extended operating current range
- Extended temperature range

Applications


- Portable equipment
- Disk drives
- Instrumentation
- Audio equipment
- Data acquisition systems

Description

The FAN4040 series of precision shunt references are ideal for space- and cost-sensitive applications. They are available in three output voltages (2.500V, 3.300V and 5.00V) and with four output voltage tolerances (0.1%, 0.2%, 0.5% and 1%). They also have excellent temperature coefficients, to 100ppm/ $^\circ\text{C}$ for the tighter tolerance grades. The FAN4040 series has an extended operating current range, sinking as much as 25mA.

The FAN4040 series is available in SOT-23 package.

Connection Diagrams

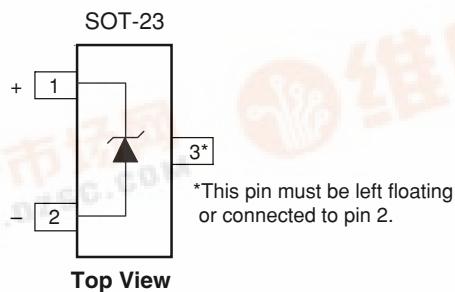

Absolute Maximum Ratings¹

Ratings are over full operating free-air temperature range unless otherwise noted.

Parameter	Min.	Max.	Unit
Continuous cathode current, I_K	-30	30	mA
Power dissipation	See Dissipation Rating Table		
Storage Temperature Range	-65	150	°C
Lead Temperature (Soldering, 10 sec.)		300	°C

Notes:

1. Functional operation under these conditions is not implied. Permanent damage may occur if the device is subjected to conditions outside these ratings.

Recommended Operating Conditions

Parameter		Min.	Max.	Unit
Continuous cathode current, I_K		0.025	25	mA
Operating temperature range in free air, T_A	I Grade	-40	85	°C
	E Grade	-40	125	°C


Dissipation Rating Table

Package	Power Rating $TA \leq 25^\circ\text{C}$	Derating Factor $TA \geq 25^\circ\text{C}$	Power Rating $TA = 70^\circ\text{C}$
SOT23 ¹	306mW	3.0mW/ $^\circ\text{C}$	168mW

Note:

1. It is recommended to connect pin 3 to pin 2 to ensure optimal thermal performance.

Equivalent Schematic

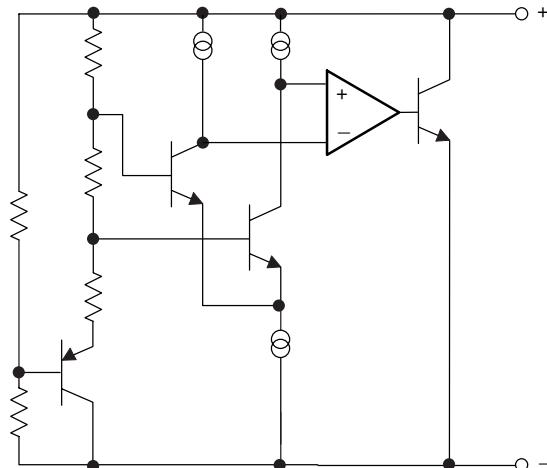

Guaranteed Electrical Characteristics, FAN4040-2.5, Industrial Temperature Range

(TA = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units
			A	B	C	D	
V_R	Reverse Breakdown Voltage	$I_K = 100\mu A$	2.500	2.500	2.500	2.500	V*
TCV_R	Reverse Breakdown Voltage Tolerance	$I_K = 100\mu A$	• ±2.5 ±19	±5.0 ±21	±12 ±29	±25 ±49	mV mV
I_{RMIN}	Minimum Operating Current		• 65	65	65	70	μA
$\Delta V_R/\Delta T$	Reverse Breakdown Voltage Temperature Coefficient	$I_K = 1mA$	• ±100	±100	±100	±150	ppm/°C
$\Delta V_R (\Delta I_K)$	Reverse Breakdown Voltage Change with Operating Current	$I_{RMIN} \leq I_K \leq 1mA$ $1mA \leq I_K \leq 15mA$ $1mA \leq I_K \leq 25mA$	• 1.2 • 8.0 10	1.2 8.0 10	1.2 8.0 10	1.5 10.0 12	mV mV mV*
Z_{KA}	Reverse Dynamic Impedance	$I_K=1mA, f=120Hz,$ $I_{AC}=0.1I_K$		1.0	1.0	1.0	1.3
e_N	Wideband Noise	$I_K=100\mu A,$ $10Hz \leq f \leq 10kHz$		35	35	35	35
ΔV_R	Reverse Breakdown Voltage Long-term Stability	$t=1000hrs, T=25°C,$ $I_K=100\mu A$		120	120	120	120
							ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4040-3.3, Industrial Temperature Range

(TA = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units
			A	B	C	D	
V_R	Reverse Breakdown Voltage	$I_K = 100\mu A$	3.300	3.300	3.300	3.300	V*
TCV_R	Reverse Breakdown Voltage Tolerance	$I_K = 100\mu A$	• ±3.3 ±25	±6.6 ±28	±17 ±38	±33 ±65	mV mV
I_{RMIN}	Minimum Operating Current		• 70	70	70	75	μA
$\Delta V_R/\Delta T$	Reverse Breakdown Voltage Temperature Coefficient	$I_K = 1mA$	• ±100	±100	±100	±150	ppm/°C
$\Delta V_R (\Delta I_K)$	Reverse Breakdown Voltage Change with Operating Current	$I_{RMIN} \leq I_K \leq 1mA$ $1mA \leq I_K \leq 15mA$ $1mA \leq I_K \leq 25mA$	• 1.2 • 10 12	1.2 10 12	1.2 10 12	1.5 13 15	mV mV mV*
Z_{KA}	Reverse Dynamic Impedance	$I_K=1mA, f=120Hz,$ $I_{AC}=0.1I_K$		1.0	1.0	1.0	1.3
e_N	Wideband Noise	$I_K=100\mu A,$ $10Hz \leq f \leq 10kHz$		70	70	70	70
ΔV_R	Reverse Breakdown Voltage Long-term Stability	$t=1000hrs, T=25°C,$ $I_K=100\mu A$		120	120	120	120
							ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4040-5.0, Industrial Temperature Range

(TA = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units	
			A	B	C	D		
V_R	Reverse Breakdown Voltage	$I_K = 100\mu A$	5.00	5.00	5.00	5.00	V*	
TCV_R	Reverse Breakdown Voltage Tolerance	$I_K = 100\mu A$	± 5	± 10	± 24	± 50	mV	
			• ± 40	• ± 45	• ± 60	• ± 100	mV	
I_{RMIN}	Minimum Operating Current		• 65	65	65	70	μA	
$\Delta V_R/\Delta T$	Reverse Breakdown Voltage Temperature Coefficient	$I_K = 1mA$	• ± 100	• ± 100	• ± 100	• ± 150	ppm/°C	
$\Delta V_R (\Delta I_K)$	Reverse Breakdown Voltage Change with Operating Current	$I_{RMIN} \leq I_K \leq 1mA$ $1mA \leq I_K \leq 15mA$ $1mA \leq I_K \leq 25mA$	• 1.2	1.2	1.2	1.5	mV	
			• 8.0	8.0	8.0	10.0	mV	
			10	10	10	12	mV*	
Z_{KA}	Reverse Dynamic Impedance	$I_K=1mA, f=120Hz, I_{AC}=0.1I_K$		1.0	1.0	1.0	1.3	Ω^*
e_N	Wideband Noise	$I_K=100\mu A, 10Hz \leq f \leq 10kHz$		70	70	70	70	μV_{RMS}^*
ΔV_R	Reverse Breakdown Voltage Long-term Stability	$t=1000hrs, T=25^\circ C, I_K=100\mu A$		120	120	120	120	ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4040-2.5, Extended Temperature Range

(TA = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units	
			A	B	C	D		
V_R	Reverse Breakdown Voltage	$I_K = 100\mu A$	2.500	2.500	2.500	2.500	V*	
TCV_R	Reverse Breakdown Voltage Tolerance	$I_K = 100\mu A$	± 2.5	± 5.0	± 12	± 25	mV	
			• ± 25	• ± 30	• ± 35	• ± 49	mV	
I_{RMIN}	Minimum Operating Current		• 65	65	65	70	μA	
$\Delta V_R/\Delta T$	Reverse Breakdown Voltage Temperature Coefficient	$I_K = 1mA$	• ± 100	• ± 100	• ± 100	• ± 150	ppm/°C	
$\Delta V_R (\Delta I_K)$	Reverse Breakdown Voltage Change with Operating Current	$I_{RMIN} \leq I_K \leq 1mA$ $1mA \leq I_K \leq 15mA$ $1mA \leq I_K \leq 25mA$	• 1.5	1.5	1.5	1.5	mV	
			• 10.0	10.0	10.0	10.0	mV	
			10	10	10	12	mV*	
Z_{KA}	Reverse Dynamic Impedance	$I_K=1mA, f=120Hz, I_{AC}=0.1I_K$		1.0	1.0	1.0	1.3	Ω^*
e_N	Wideband Noise	$I_K=100\mu A, 10Hz \leq f \leq 10kHz$		70	70	70	70	μV_{RMS}^*
ΔV_R	Reverse Breakdown Voltage Long-term Stability	$t=1000hrs, T=25^\circ C, I_K=100\mu A$		120	120	120	120	ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4040-3.3, Extended Temperature Range

(TA = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units	
			A	B	C	D		
VR	Reverse Breakdown Voltage	IK = 100µA	3.300	3.300	3.300	3.300	V*	
TCVR	Reverse Breakdown Voltage Tolerance	IK = 100µA	• ±3.3 • ±30	• ±6.6 • ±35	• ±17 • ±42	• ±33 • ±65	mV mV	
IRMIN	Minimum Operating Current		• 70	70	70	75	µA	
ΔVR/ΔT	Reverse Breakdown Voltage Temperature Coefficient	IK = 1mA	• ±100	±100	±100	±150	ppm/°C	
ΔVR (ΔIK)	Reverse Breakdown Voltage Change with Operating Current	IRMIN ≤ IK ≤ 1mA 1mA ≤ IK ≤ 15mA 1mA ≤ IK ≤ 25mA	• 1.5 • 10 • 12	1.5 10 12	1.5 10 12	1.5 13 15	mV mV mV*	
ZKA	Reverse Dynamic Impedance	IK=1mA, f=120Hz, IAC=0.1IK		1.0	1.0	1.0	1.3	Ω*
eN	Wideband Noise	IK=100µA, 10Hz ≤ f ≤ 10kHz		70	70	70	70	µVRMS*
ΔVR	Reverse Breakdown Voltage Long-term Stability	t=1000hrs, T=25°C, IK=100µA		120	120	120	120	ppm*

*Typical.

Guaranteed Electrical Characteristics, FAN4040-5.0, Extended Temperature Range

(TA = 25°C unless otherwise specified, in free air)

The • denotes specifications which apply over the full operating temperature range.

Symbol	Parameter	Conditions	Limits				Units	
			A	B	C	D		
VR	Reverse Breakdown Voltage	IK = 100µA	5.00	5.00	5.00	5.00	V*	
TCVR	Reverse Breakdown Voltage Tolerance	IK = 100µA	• ±5 • ±50	• ±10 • ±60	• ±24 • ±70	• ±50 • ±100	mV mV	
IRMIN	Minimum Operating Current		• 100	100	100	100	µA	
ΔVR/ΔT	Reverse Breakdown Voltage Temperature Coefficient	IK = 1mA	• ±100	±100	±100	±150	ppm/°C	
ΔVR (ΔIK)	Reverse Breakdown Voltage Change with Operating Current	IRMIN ≤ IK ≤ 1mA 1mA ≤ IK ≤ 15mA 1mA ≤ IK ≤ 25mA	• 1.5 • 10 • 10	1.5 10 10	1.5 10 10	1.5 15 12	mV mV mV*	
ZKA	Reverse Dynamic Impedance	IK=1mA, f=120Hz, IAC=0.1IK		1.0	1.0	1.0	1.3	Ω*
eN	Wideband Noise	IK=100µA, 10Hz ≤ f ≤ 10kHz		70	70	70	70	µVRMS*
ΔVR	Reverse Breakdown Voltage Long-term Stability	t=1000hrs, T=25°C, IK=100µA		120	120	120	120	ppm*

*Typical.


Mechanical Dimensions

SOT-23 Package

Symbol	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	.035	.044	.89	1.12	
A1	.0004	.004	.01	.10	
B	.012	.020	.30	.50	
c	.003	.008	.08	.20	
D	.110	.120	2.80	3.04	
E	.047	.055	1.20	1.40	
e	.037 BSC		.95 BSC		
e1	.075 BSC		1.90 BSC		
H	.083	.104	2.10	2.64	
L	.021 REF		.54 REF		
S	.016 Nom		.395 Nom		

Notes:

1. Dimensions are inclusive of plating.
2. Dimensions are exclusive of mold flash & metal burr.
3. Comply to JEDEC TO-236.
4. This drawing is for matrix leadframe only.

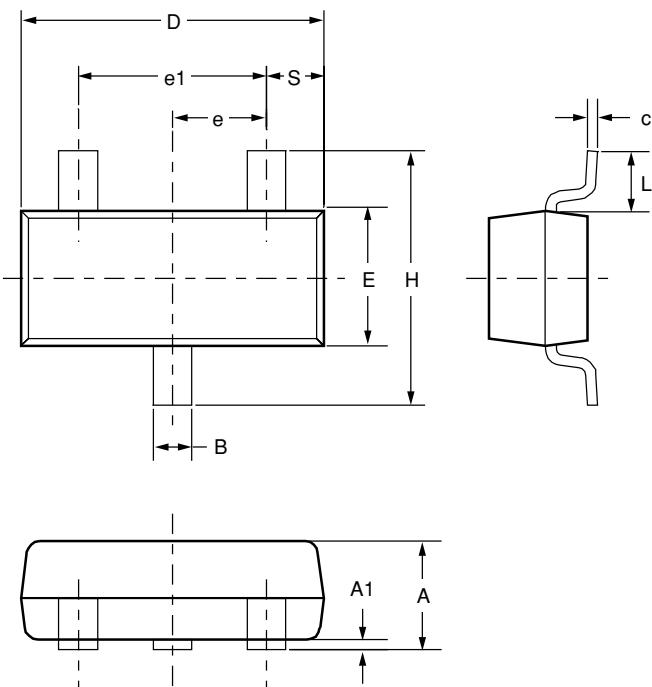

Ordering Information

Example: FAN4040DIS325X ('X' denotes Tape and Reel)

FAN4040	D	I	S3	25
Grade		Temperature		Voltage
0.1% = A*		-40°C to 85°C – I		2.5V = 25
0.2% = B		-40°C to 125°C – E		3.3V = 33
0.5% = C				5.0V = 5
1.0% = D				

* 'A' grade is a special order. Please contact factory for availability.

SOT-23 Package Marking Information

Only 3 fields of marking are possible on an SOT-23. This table gives the meaning of these fields.

Example: F2A

F	2	A
Voltage		Grade
2.5V = 2		0.1% = A
3.3V = 3		0.2% = B
5.0V = 5		0.5% = C
		1.0% = D

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.