





FMMD2838

SOT23 SILICON PLANAR HIGH SPEED
SWITCHING COMMON CATHODE DIODE PAIR


ISSUE 2 – NOVEMBER 1996

FMMD2838

DIODE PIN CONNECTION

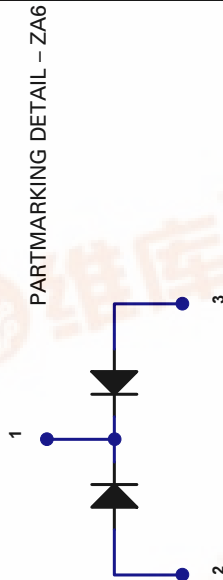


SOT23



DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	2.67	3.05	0.105	0.120
B	1.20	1.40	0.047	0.055
C	–	1.10	–	0.043
D	0.37	0.53	0.0145	0.021
F	0.085	0.15	0.0033	0.0059
G	NOM 1.9		NOM 0.075	
K	0.01	0.10	0.0004	0.004
L	2.10	2.50	0.0825	0.0985
N	NOM 0.95		NOM 0.37	

Package Details

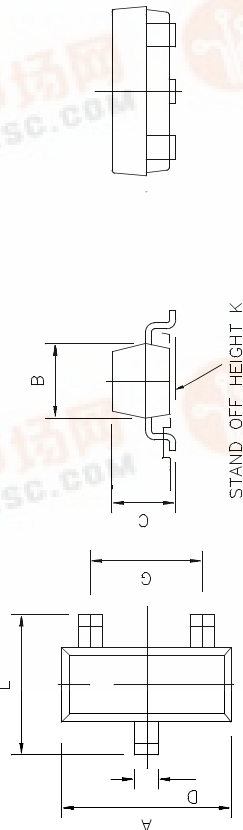

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Breakdown Voltage ($I_R=100\mu A$)	$V_{(BR)}$	75	V
Average Rectified Forward Current †	$I_{F(AV)}$	100	mA
Repetitive Peak Forward Surge Current	I_{FRM}	200	mA
Power Dissipation at $T_{amb} = 25^\circ C$	P_{Tot}	330	mW
Operating and Storage Temperature Range	T_J, T_{stg}	-55 to +150	$^\circ C$

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ C$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Forward Voltage	V_F		1.0	V	$I_F=10mA$
			1.0	V	$I_F=50mA$
			1.2	V	$I_F=100mA$
Reverse Current	I_R		100	nA	$V_R=30V$
Recovery Time *	t_{rr}		6	ns	$I_F=I_R=10mA, I_R(REC)=1.0mA$
Diode Capacitance	C_d		4	pF	$V_R=0, f=1MHz$

*For switching test circuit diagram see page

†Over any 20ms period

Spice parameter data is available upon request for this device

ZETEX

Zetex plc.
Fields New Road, Chadderton, Oldham, OL98NP, United Kingdom.
Telephone: 0161627 5105 (Sales), 0161627 4963 (General Enquiries)
Facsimile: 0161627 5467

Zetex GmbH
Prosselsweg 30
881827 Munchen
Germany
Telephone: (089) 430 90 29
Fax: (089) 439 37 64

Zetex Inc.
87 Modular Avenue
Commack NY11725
U.S.A.
Telephone: (516) 5437100
Fax: (516) 8647630

Zetex (Asia) Ltd.
3510 Metroplaza, Tower 2
Hing Fong Road, Kwai Fong
Hong Kong
Telephone: 2610 0611
Fax: 2425 0494

These are supported by
agents and distributors in
major countries worldwide

© Zetex plc 1995

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.


ZETEX

查询FMMD2838供应商

捷多邦, 专业PCB打样工厂, 24小时加急出货


**SOT23 SILICON PLANAR HIGH SPEED
SWITCHING COMMON CATHODE DIODE PAIR**

FMD2838



PARTMARKING DETAIL - ZA6

Package Details



STAND OFF HEIGHT K

ABSOLUTE MAXIMUM RATINGS:

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Forward Voltage	V_F		1.0 1.0 1.2	V V V	$I_F=10\text{mA}$ $I_F=50\text{mA}$ $I_F=100\text{mA}$
Reverse Current	I_R		100	nA	$V_R=30\text{V}$
Recovery Time*	t_{rr}		6	ns	$I_F=I_R=10\text{mA}$, $I_{R(REC)}=1.0\text{mA}$
Diode Capacitance	C_d		4	pF	$V_R=0$, $f=1\text{MHz}$

+Over any 20ms period

Spice parameter data is available upon request for this device



Zetex (Asia) Ltd.
3510 Metropola, Tower 2
Hing Fong Road, Kwai Fong
Hong Kong
Telephone: 2610 0611
Fax: 2425 0494

These are supported by agents and distributors in major countries worldwide

©Zetex plc 1995

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or relied upon for any purpose other than for the purpose of the contract. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

ZETEX