
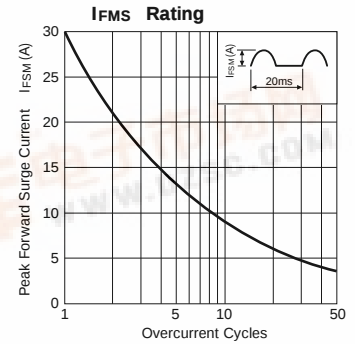






Fast-Recovery Rectifier Diodes

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)										Others	
	V _{RM} (V)	I _{F(AV)} (A) With Heatsink	I _{FSM} (A)	T _J (°C)	T _{stg} (°C)	V _F (V)		I _R (μA)	I _R (H) (μA)	t _{rr} ① (μs)		t _{rr} ② (μs)		R _{th} (j-c)	Mass	Fig	
		50Hz Half-cycle Sinewave Single Shot			max per element	I _F (A)	V _R =V _{RM} max per element	V _R =V _{RM} , Ta=100°C max per element		I _F /I _{RP} (mA)		I _F /I _{RP} (mA)	(°C/W)	(g)			
FMU-12S, R	200	5.0	30	-40 to +150		1.5	2.5	50	500	0.4	100/100	0.18	100/200	4.0	2.1	Ⓐ	
FMU-14S, R	400																
FMU-16S, R	600																
FMU-21S, R	100	10.0	40			1.5	5.0	50	500	0.4	100/100	0.18	100/200	4.0	2.1		
FMU-22S, R	200																
FMU-24S, R	400																
FMU-26S, R	600	20.0	80			1.5	10.0	50	500	0.4	100/100	0.18	100/200	2.0	5.5	Ⓑ	
FMU-32S, R	200																
FMU-34S, R	400																
FMU-36S, R	600																




FMU-1 series



FMU-2 series

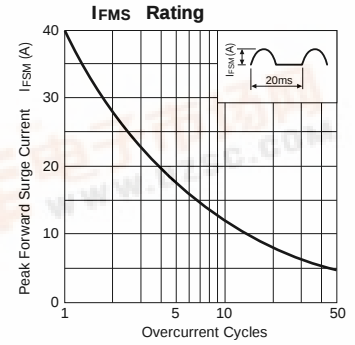

FMU-3 series

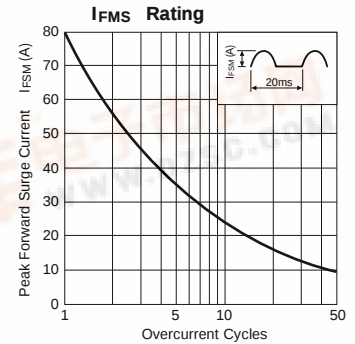

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

Fig. (A)




Fig. (B)

