



# FR251G THRU FR257G

## GLASS PASSIVATED JUNCTION FAST SWITCHING RECTIFIER


Reverse Voltage - 50 to 1000 Volts

Forward Current - 2.5 Amperes

### Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0 utilizing Flame retardant epoxy molding compound
- Glass passivated junction in R-3 package
- 2.5 ampere operation at  $T_A=55^\circ\text{C}$  with no thermal runaway
- Fast switching for high efficiency

### R-3

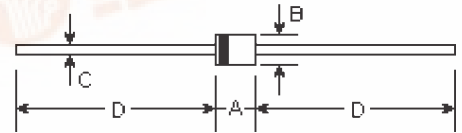

### Mechanical Data

- **Case:** Molded plastic, R-3
- **Terminals:** Axial leads, solderable per MIL-STD-202, method 208
- **Polarity:** Band denotes cathode
- **Mounting Position:** Any
- **Weight:** 0.021 ounce, 0.60 gram

DIM	DIMENSIONS				Note
	inches		mm		
	Min.	Max.	Min.	Max.	
A	0.138	0.161	3.50	4.10	
B	0.138	0.161	3.50	4.10	φ
C	0.040	0.043	1.0	1.10	φ
D	1.000	-	25.40	-	

### Maximum Ratings and Electrical Characteristics

Ratings at  $25^\circ\text{C}$  ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.


	Symbols	FR 251G	FR 252G	FR 253G	FR 254G	FR 255G	FR 256G	FR 257G	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	$I_{(AV)}$	2.5							Amps
Peak forward surge current, $I_{FSM}$ (Surge): 8.3mS single half sine-wave superimposed on rated load (MIL-STD-750D 4066 method)	$I_{FSM}$	70.0							Amps
Maximum forward voltage @2.5A, $25^\circ\text{C}$	$V_F$	1.3							Volts
Maximum DC reverse current, @ rated reverse voltage	$I_R$	5.0 300.0							$\mu\text{A}$
Reverse recovery time (Note 1)	$T_{rr}$	150			250		500		nS
Typical junction capacitance (Note 2)	$C_J$	35.0							$\mu\text{F}$
Typical thermal resistance (Note 3)	$R_{\theta(JA)}$	22.0							$^\circ\text{C/W}$
Operating and storage temperature range	$T_J, T_{STG}$	-55 to +150							$^\circ\text{C}$

Notes:

(1) Reverse recovery test conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_T=0.25\text{A}$

(2) Measured at 1.0MHz and applied reverse voltage of 4.0 volts

(3) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

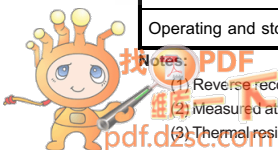

# RATINGS AND CHARACTERISTIC CURVES

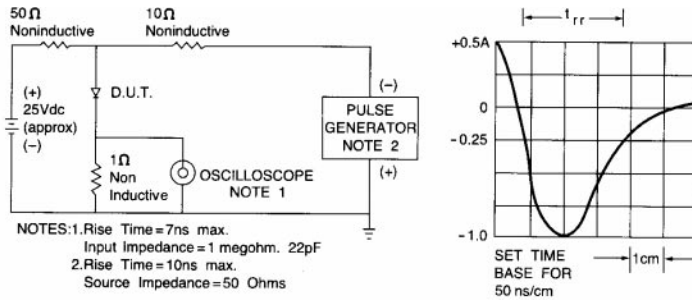


Fig. 1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

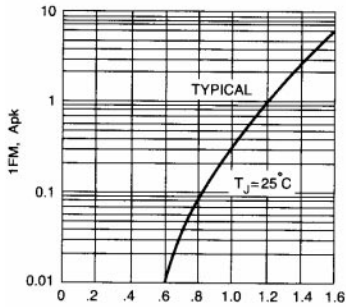


Fig. 2 - FORWARD CHARACTERISTICS

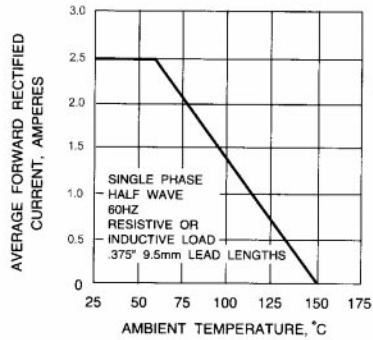


Fig. 3 - FORWARD CURRENT DERATING CURVE

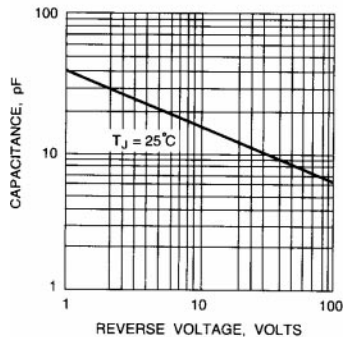


Fig. 5 - PEAK FORWARD SURGE CURRENT

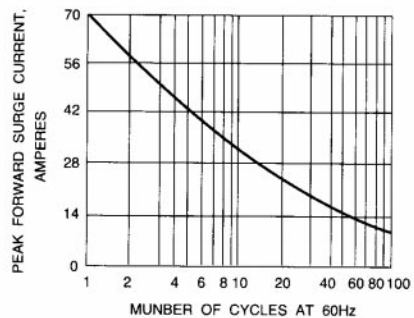


Fig. 4 - TYPICAL JUNCTION CAPACITANCE vs. REVERSE VOLTAGE