



# FRA801G THRU FRA807G

## 8.0 AMPS. Glass Passivated Fast Recovery Rectifiers



Voltage Range  
50 to 1000 Volts  
Current  
8.0 Amperes



### Features

- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability

### Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Terminals: Leads solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: As marked
- ✧ High temperature soldering guaranteed: 260°C/10 seconds .16", (4.06mm) from case.
- ✧ Mounting position: Any
- ✧ Weight: 2.24 grams

### TO-220A

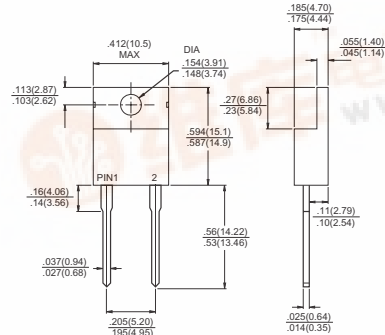

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

| Type Number  | Symbol          | FRA 801G    | FRA 802G | FRA 803G | FRA 804G | FRA 805G | FRA 806G | FRA 807G | Units        |
|--|-----------------|-------------|----------|----------|----------|----------|----------|----------|--------------|
| Maximum Recurrent Peak Reverse Voltage   | $V_{RRM}$       | 50          | 100      | 200      | 400      | 600      | 800      | 1000     | V            |
| Maximum RMS Voltage  | $V_{RMS}$       | 35          | 70       | 140      | 280      | 420      | 560      | 700      | V            |
| Maximum DC Blocking Voltage  | $V_{DC}$        | 50          | 100      | 200      | 400      | 600      | 800      | 1000     | V            |
| Maximum Average Forward Rectified Current @ $T_C = 55^\circ C$                                     | $I_{(AV)}$      | 8.0         |          |          |          |          |          |          | A            |
| Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method) | $I_{FSM}$       | 150         |          |          |          |          |          |          | A            |
| Maximum Instantaneous Forward Voltage @ 8.0A   | $V_F$           | 1.3         |          |          |          |          |          |          | V            |
| Maximum DC Reverse Current @ $T_C=25^\circ C$ at Rated DC Blocking Voltage @ $T_C=125^\circ C$     | $I_R$           | 5.0<br>100  |          |          |          |          |          |          | uA<br>uA     |
| Maximum Reverse Recovery Time ( Note 2 )   | $T_{rr}$        | 150         |          |          | 250      |          | 500      |          | nS           |
| Typical Junction Capacitance ( Note 1 ) $T_J=25^\circ C$   | $C_j$           | 60          |          |          |          |          |          |          | pF           |
| Typical Thermal Resistance (Note 3)  | $R_{\theta JC}$ | 3.0         |          |          |          |          |          |          | $^\circ C/W$ |
| Operating and Storage Temperature Range  | $T_J, T_{STG}$  | -65 to +150 |          |          |          |          |          |          | $^\circ C$   |

Notes: 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.

2. Reverse Recovery Test Conditions:  $I_F=0.5A, I_R=1.0A, I_{RR}=0.25A$

3. Thermal Resistance from Junction to Case, with Heatsink size 2" x 3" x 0.25" Al-Plate



## RATINGS AND CHARACTERISTIC CURVES (FRA801G THRU FRA807G)

FIG. 1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM


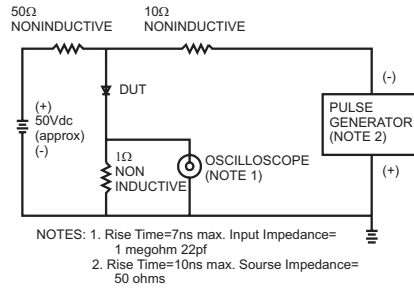


FIG. 2- MAXIMUM FORWARD CURRENT DERATING CURVE

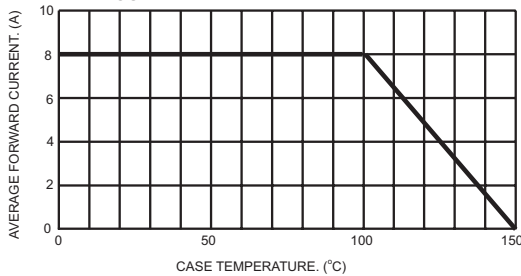


FIG. 3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

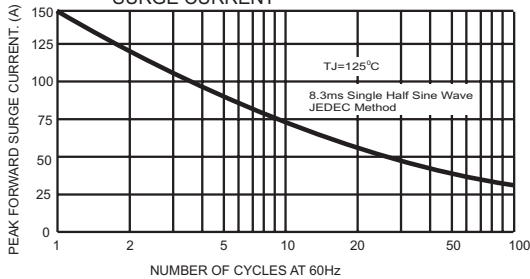


FIG. 4- TYPICAL JUNCTION CAPACITANCE

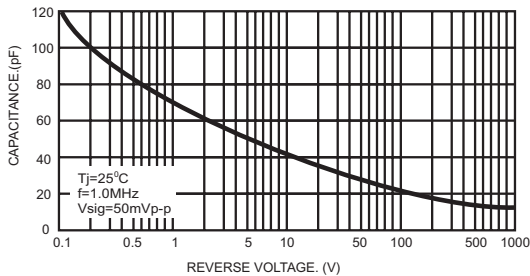


FIG. 5- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

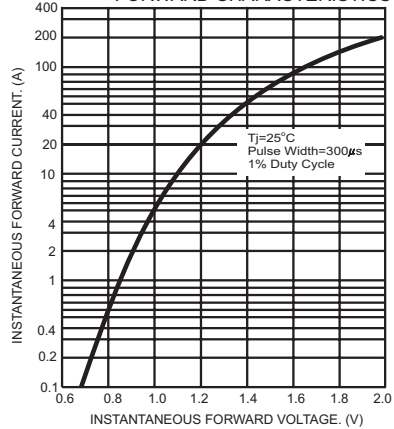


FIG. 6- TYPICAL REVERSE CHARACTERISTICS

