


# 30Amp Schottky Barrier Rectifier

## FST3080 — FST30100

查询FST30100供应商

通多邦 专业PCB打样工厂 24小时加急出货

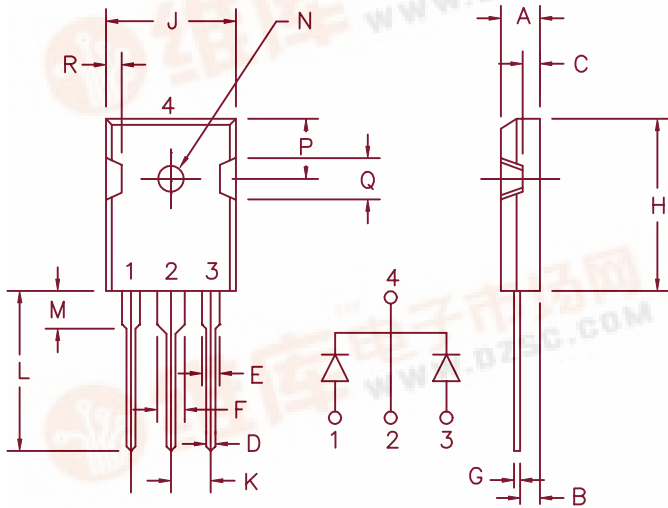

Similar to TO-247AD

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.185	.209	4.70	5.31	
B	.087	.102	2.21	2.59	
C	.059	.098	1.50	2.49	
D	.040	.055	1.02	1.40	
E	.079	.094	2.01	2.39	
F	.118	.133	3.00	3.38	
G	.016	.031	.410	0.78	
H	.819	.883	20.80	22.4	
J	.627	.650	15.93	16.5	
K	.215	—	5.46	—	Typ.
L	.790	.810	20.07	20.6	
M	.157	.180	3.99	4.57	
N	.139	.144	3.53	3.66	Dia.
P	.255	.300	6.48	7.62	
Q	.170	.210	4.32	5.33	
R	.080	.110	2.03	2.79	

Microsemi Catalog Number

Repetitive Peak Reverse Voltage

Transient Peak Reverse Voltage

FST3080  
FST3090  
FST30100

80V  
90V  
100V

80V  
90V  
100V

- Schottky Barrier Rectifier
- Guard ring for reverse protection
- Low power loss, high efficiency
- High surge capacity
- VRRM 80 to 100 Volts

### Electrical Characteristics

Average Forward Current per pkg.  
Average Forward Current per leg  
Maximum Surge Current per leg  
Max. Peak Forward Voltage per leg  
Max. Peak Forward Voltage per leg  
Max. Peak Reverse Current per leg  
Max. Peak Reverse Current per leg  
Typical Junction Capacitance per leg

$I_{F(AV)}$  30Amps  
 $I_{F(AV)}$  15Amps  
 $I_{FSM}$  350 Amps  
 $V_{FM}$  0.65 Volts  
 $V_{FM}$  0.85 Volts  
 $I_{RM}$  15 mA  
 $I_{RM}$  500  $\mu$ A  
 $C_j$  550 pF

$T_C = 155^\circ\text{C}$ , square wave,  $R_{\theta JC} = 0.9^\circ\text{C/W}$   
 $T_C = 155^\circ\text{C}$ , square wave,  $R_{\theta JC} = 1.8^\circ\text{C/W}$   
8.3ms, half sine,  $T_J = 175^\circ\text{C}$   
 $I_{FM} = 15\text{A}$ ,  $T_J = 175^\circ\text{C}^*$   
 $I_{FM} = 15\text{A}$ ,  $T_J = 25^\circ\text{C}^*$   
 $V_{RRM}$ ,  $T_J = 125^\circ\text{C}^*$   
 $V_{RRM}$ ,  $T_J = 25^\circ\text{C}$   
 $V_R = 5.0\text{V}$ ,  $T_J = 25^\circ\text{C}$


\*Pulse test: Pulse width 300  $\mu$ sec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range  
Operating junction temp range  
Max thermal resistance per leg  
Max thermal resistance per pkg.  
Mounting Torque  
Weight

$T_{STG}$   
 $T_J$   
 $R_{\theta JC}$   
 $R_{\theta JC}$

$-55^\circ\text{C}$  to  $175^\circ\text{C}$   
 $-55^\circ\text{C}$  to  $175^\circ\text{C}$   
 $1.8^\circ\text{C/W}$   
 $0.9^\circ\text{C/W}$   
10 inch pounds maximum (4-40 screw)  
.22 ounces (6.36 grams) typical



COLORADO

800 Hoyt Street  
Broomfield, CO. 80020  
PH: (303) 469-2161  
FAX: (303) 466-3775

2-3-00 Rev. 2

# FST3080 — FST30100

Figure 1  
Typical Forward Characteristics — Per Leg

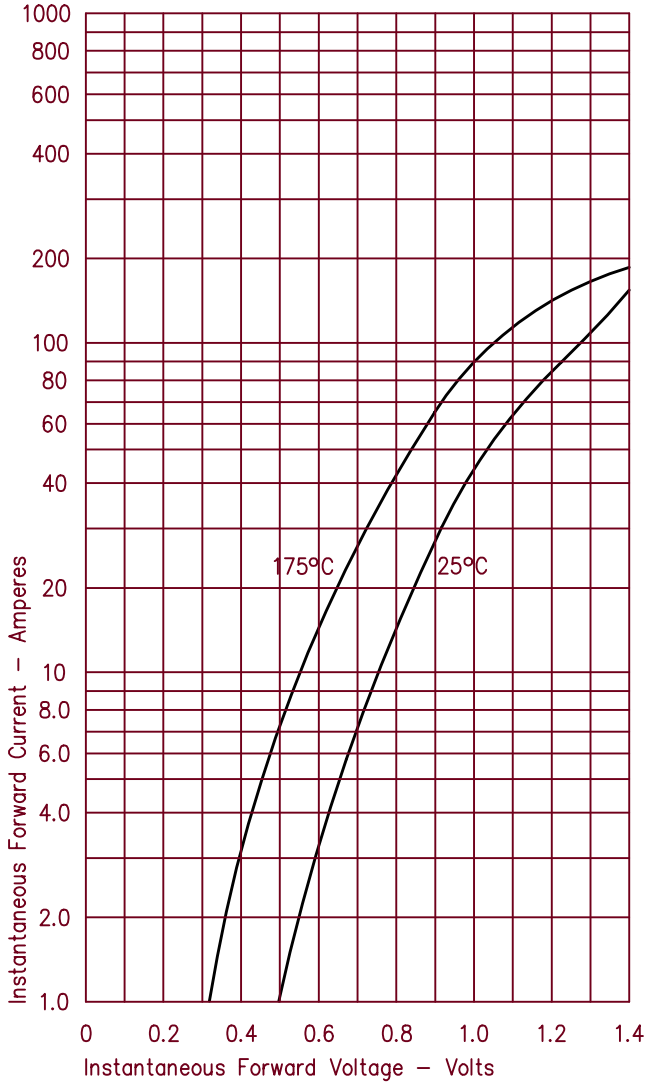


Figure 3  
Typical Junction Capacitance — Per Leg

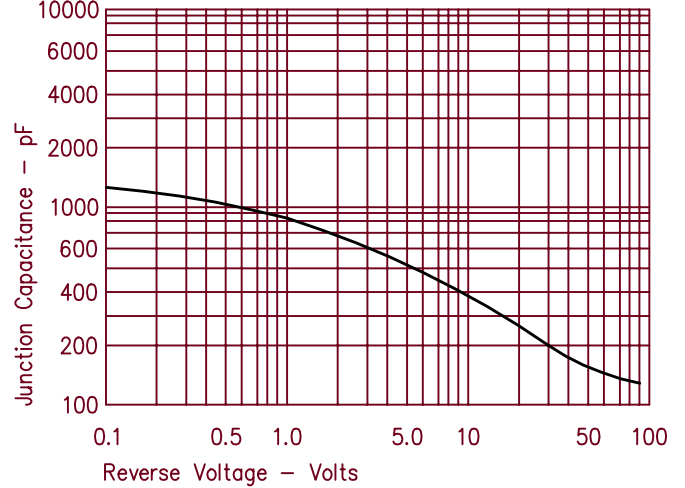


Figure 4  
Forward Current Derating — Per Leg

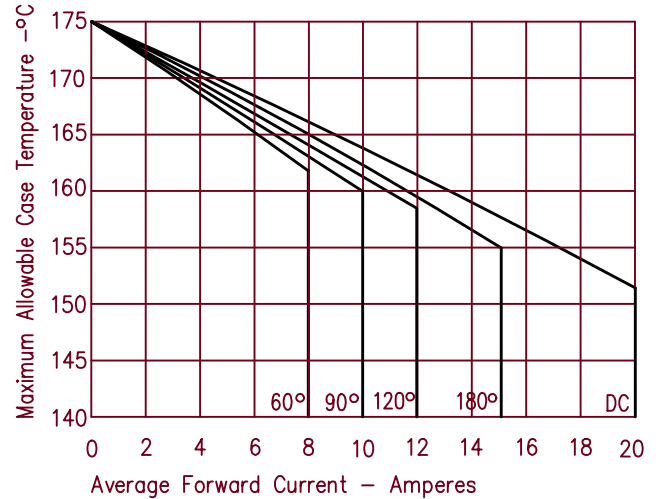


Figure 2  
Typical Reverse Characteristics — Per Leg

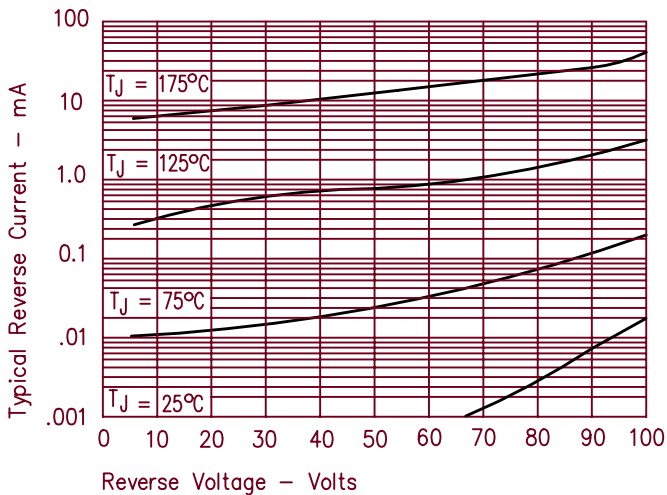


Figure 5  
Maximum Forward Power Dissipation — Per Leg

