


FXO-32F

Miniature Clock Crystal Oscillator

Features

- Ideal for use as an image sensor clock for compact video cameras.
- Lower noise and lower current for reduced power consumption.
- This crystal oscillator has a built-in C-MOS IC with tri-state function.

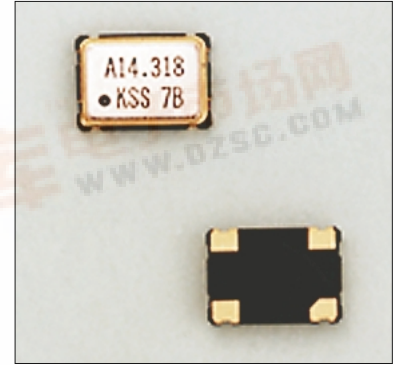


Specifications

Item	Type	FXO-32F	FXO-32FL
Frequency Range		8.0~32.0MHz	
Standard Frequency		14.31818, 17.734476, 28.375, 28.63636MHz *1	
Frequency Stability		±30×10 ⁻⁶	
Operating Temperature Range		-10~+60°C	
Storage Temperature Range		-20~+80°C	
Supply Voltage		5V±5%	3V±5% *2
Current		12mA MAX.	8mA MAX.
Load		15pF (2TTL)	15pF (1TTL)
Output Level		V _{OH} : 0.9×V _{DD} MIN. V _{OL} : 0.5V MAX.	
Output Symmetry		40~60% (VT=1/2V _{DD})	
Rise Time/Fall Time		12ns MAX.	16ns MAX.
Start-up Time		3ms MAX.	
Vibration		10~55Hz Ampulitude 1.5mm, Cycle 2 minute, 3 direction, 2 hour each	
Shock		1000G	
Weight		0.2g	
Application		for Audio-Visual Equipment	

*1 Please inquire about frequencies other than the above.
 *2 3.3V supply model also available.

* Taping item packaging : one unit 3,000 pcs or 1,000 pcs

Outline

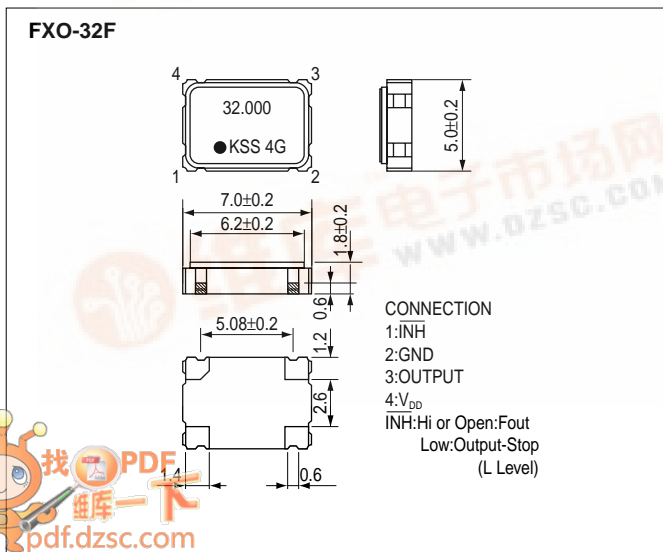

Land Pattern(reference)

