



## MOS FET Relays

**G3VM-353H**

### Analog-switching MOS FET Relay with SPST-NC (Single-pole, Single-throw, Normally Closed) Contacts

- New models in 350-V load voltage series with SPST-NC contacts and a 6-pin SOP package.
- Continuous load current of 120 mA.
- Dielectric strength of 1,500 Vrms between I/O.



**NEW**

**Note:** The actual product is marked differently from the image shown here.

### ■ Application Examples

- Broadband systems
- Measurement devices
- Data loggers
- Amusement machines



### ■ List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per stick	Number per tape
SPST-NC	Surface-mounting terminals	350 VAC	G3VM-353H	75	---
			G3VM-353H(TR)	---	2,500

### ■ Dimensions

**Note:** All units are in millimeters unless otherwise indicated.


#### G3VM-353H

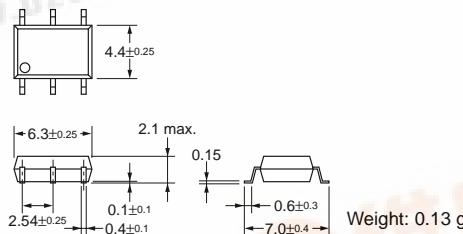

**Note:** The actual product is marked differently from the image shown here.


### ■ Terminal Arrangement/Internal Connections (Top View)

#### G3VM-353H



### ■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

#### G3VM-353H




## ■ Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	Rating	Unit	Measurement Conditions
Input	LED forward current	I <sub>F</sub>	50	mA	
	Repetitive peak LED forward current	I <sub>FP</sub>	1	A	100 µs pulses, 100 pps
	LED forward current reduction rate	Δ I <sub>F</sub> /°C	-0.5	mA/°C	Ta ≥ 25°C
	LED reverse voltage	V <sub>R</sub>	5	V	
	Connection temperature	T <sub>j</sub>	125	°C	
Output	Output dielectric strength	V <sub>OFF</sub>	350	V	
	Continuous load current	I <sub>O</sub>	120	mA	
			120		
			240		
	ON current reduction rate	Δ I <sub>ON</sub> /°C	-1.2	mA/°C	Ta ≥ 25°C
			-1.2		
			-2.4		
	Connection temperature	T <sub>j</sub>	125	°C	
	Dielectric strength between input and output (See note 1.)	V <sub>I-O</sub>	1,500	Vrms	AC for 1 min
Operating temperature		T <sub>a</sub>	-40 to +85	°C	With no icing or condensation
Storage temperature		T <sub>stg</sub>	-55 to +125	°C	With no icing or condensation
Soldering temperature (10 s)		---	260	°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

### Connection Diagram

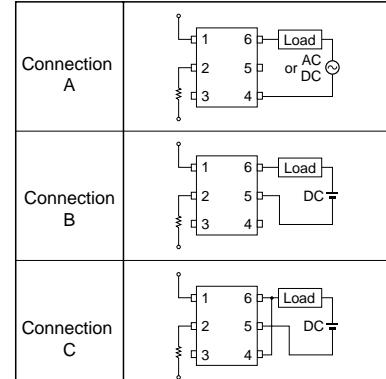

## ■ Electrical Characteristics (Ta = 25°C)

Item		Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V <sub>F</sub>	1.0	1.15	1.3	V	I <sub>F</sub> = 10 mA
	Reverse current	I <sub>R</sub>	---	---	10	µA	V <sub>R</sub> = 5 V
	Capacity between terminals	C <sub>T</sub>	---	30	---	pF	V = 0, f = 1 MHz
	Trigger LED forward current	I <sub>FT</sub>	---	1.0	3.0	mA	I <sub>OFF</sub> = 10 µA
Output	Maximum resistance with output ON	R <sub>ON</sub>	---	15	25	Ω	I <sub>O</sub> = 120 mA
			---	8	14	Ω	I <sub>O</sub> = 120 mA
			---	4	---	Ω	I <sub>O</sub> = 240 mA
	Current leakage when the relay is open	I <sub>LEAK</sub>	---	---	1.0	µA	V <sub>OFF</sub> = 350 V, I <sub>F</sub> = 5 mA
Capacity between I/O terminals		C <sub>I-O</sub>	---	0.8	---	pF	f = 1 MHz, Vs = 0 V
Insulation resistance		R <sub>I-O</sub>	1,000	---	---	MΩ	V <sub>I-O</sub> = 500 VDC, RoH ≤ 60%
Turn-ON time		t <sub>ON</sub>	---	---	1.0	ms	I <sub>F</sub> = 5 mA, R <sub>L</sub> = 200 Ω, V <sub>DD</sub> = 20 V (See note 2.)
Turn-OFF time		t <sub>OFF</sub>	---	---	3.0	ms	

## ■ Recommended Operating Conditions


Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Output dielectric strength	V <sub>DD</sub>	---	---	280	V
Operating LED forward current	I <sub>F</sub>	5	---	25	mA
Continuous load current	I <sub>O</sub>	---	---	120	mA
Operating temperature	T <sub>a</sub>	-20	---	65	°C

## ■ Engineering Data

### Load Current vs. Ambient Temperature

G3VM-353H

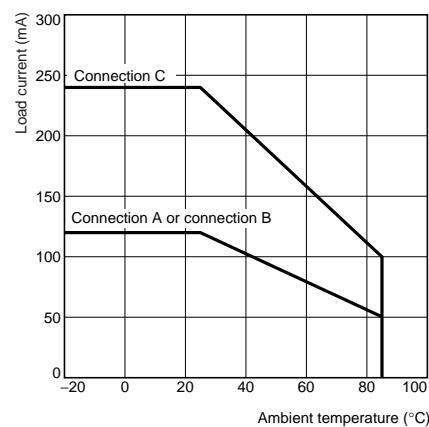

## ■ Safety Precautions

Refer to page 6 for precautions common to all G3VM models.

Note: 2. Turn-ON and Turn-OFF Times

