



DATA SHEET

GBJ4A~GBJ4K

GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER

VOLTAGE - 50 to 800 Volts CURRENT - 4.0 Amperes



Recognized File #E228882

GBJ


Unit: inch (mm)

FEATURES

- Plastic material has Underwriters Laboratory Flammability Classification 94V-O
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- Surge overload rating: 150 Amperes peak
- High temperature soldering guaranteed:
260°C/10 seconds/.375"(9.5mm) lead length at 5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: Reliable low cost construction utilizing molded plastic technique
 Terminals: Leads solderable per MIL-STD-202, Method 208
 Mounting position: Any
 Mounting torque: 5 in. lb. Max.
 Weight: 0.15 ounce, 4.0 grams

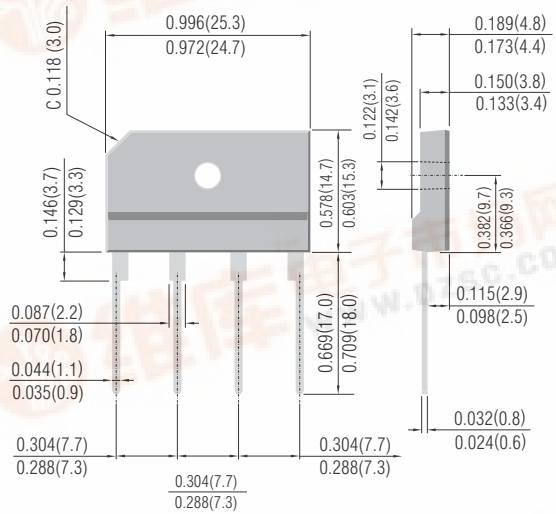

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz.
 For Capacitive load derate current by 20%.

	GBJ4A	GBJ4B	GBJ4D	GBJ4G	GBJ4J	GBJ4K	UNIT
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	V
Maximum RMS Input Voltage	35	70	140	280	420	560	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	V
Maximum Average Forward $T_C=100^\circ\text{C}$ Rectified Output Current	4.0						A
I^2t Rating for fusing ($t < 8.3\text{ms}$)	127						A^2sec
Peak Forward Surge Current single sine-wave superimposed on rated load (JEDEC method)	150						A _{pk}
Maximum Instantaneous Forward Voltage Drop per element at 2.0A	1.0						V _{pk}
Maximum Reverse Leakage at rated $T_A=25^\circ$	5						μA
DC Blocking Voltage per element $T_C=100^\circ\text{C}$	500						μA
Typical Thermal Resistance per leg(Note 2) $R_{\theta JA}$	8.6						$^\circ\text{C} / \text{W}$
Typical Thermal Resistance per leg(Note 3) $R_{\theta JC}$	3.1						$^\circ\text{C} / \text{W}$
Operating and Storage Temperature Range, T_J, T_{STG}	-55 to +150						$^\circ\text{C}$

NOTES:

1. Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw.
2. Units Mounted in free air, no heatsink, P.C.B at 0.375"(9.5mm) lead length with 0.5 x 0.5"(12 x 12mm)copper pads.
3. Units Mounted on a 2.6 x 1.4" x 0.06" thick (6.5 x 3.5 x 0.15cm) AL plate.





RATING AND CHARACTERISTIC CURVES

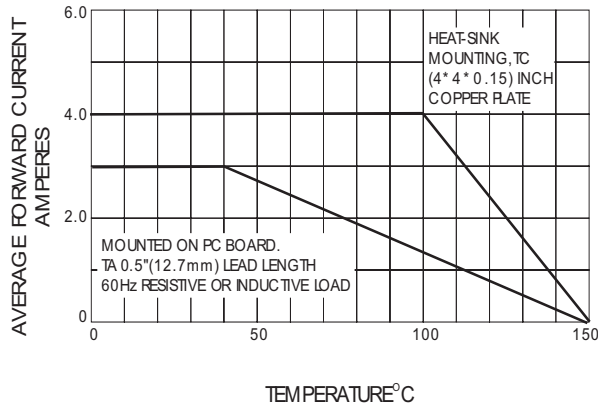


Fig. 1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

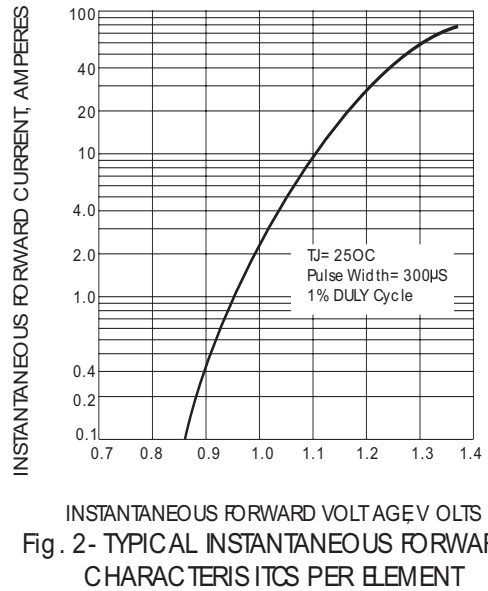


Fig. 2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER ELEMENT

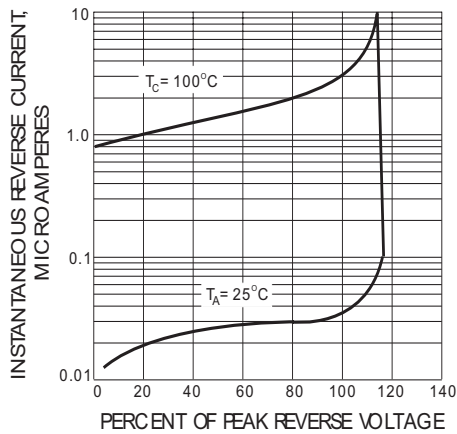


Fig. 3- TYPICAL REAK REVERSE CHARACTERISTICS

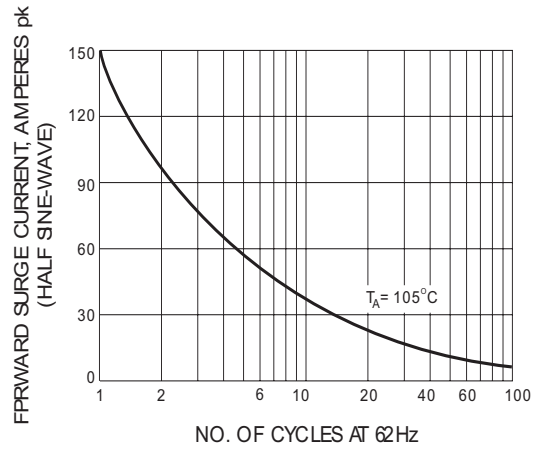


Fig. 4- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

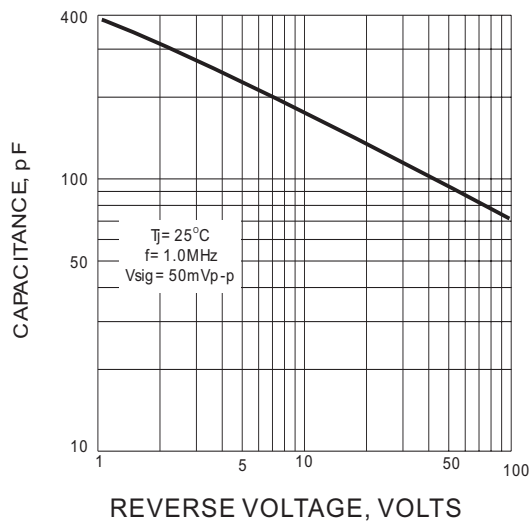


Fig.5- TYPICAL JUNCTION CAPACITANCE PER ELEMENT