


SKiiP 432GH120-4D

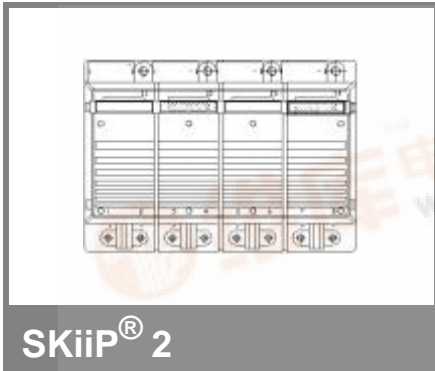

4-pack - integrated intelligent Power System

Power section

SKiiP 432GH120-4D


Features

- SKiiP technology inside
- CAL diode technology
- Integrated current sensor
- Integrated temperature sensor
- Integrated heat sink
- IEC 60721-3-3 (humidity) class 3K3/IE32 (SKiiP® 2 System)
- IEC 60068-1 (climate) 40/125/56
- UL recognized file no. E63532


- 1) with assembly of suitable MKP capacitor per terminal (SEMIKRON type is recommended)
- 8) AC connection busbars must be connected by the user; copper busbars available on request

Absolute Maximum Ratings		$T_s = 25^\circ\text{C}$ unless otherwise specified	
Symbol	Conditions	Values	Units
IGBT			
V_{CES}	Operating DC link voltage	1200	V
$V_{CC}^{1)}$		900	V
V_{GES}		± 20	V
I_C	$T_s = 25 (70)^\circ\text{C}$	400 (300)	A
Inverse diode			
$I_F = -I_C$	$T_s = 25 (70)^\circ\text{C}$	400 (300)	A
I_{FSM}	$T_j = 150^\circ\text{C}$, $t_p = 10\text{ ms}$; sin.	2880	A
I^2t (Diode)	Diode, $T_j = 150^\circ\text{C}$, 10 ms	41	kA^2s
T_j , (T_{stg})		- 40 (- 25) ... + 150 (125)	$^\circ\text{C}$
V_{isol}	AC, 1 min. (mainterminals to heat sink)	3000	V


Characteristics		$T_s = 25^\circ\text{C}$ unless otherwise specified							
Symbol	Conditions	min.	typ.	max.	Units				
IGBT									
V_{CEsat}	$I_C = 350\text{ A}$, $T_j = 25 (125)^\circ\text{C}$		2,6 (3,1)	3,1	V				
V_{CEO}	$T_j = 25 (125)^\circ\text{C}$		1,2 (1,3)	1,5 (1,6)	V				
r_{CE}	$T_j = 25 (125)^\circ\text{C}$		3,8 (5)	4,5 (5,8)	$\text{m}\Omega$				
I_{CES}	$V_{GE} = 0\text{ V}$, $V_{CE} = V_{CES}$, $T_j = 25 (125)^\circ\text{C}$		(20)	0,8	mA				
$E_{on} + E_{off}$	$I_C = 350\text{ A}$, $V_{CC} = 600\text{ V}$ $T_j = 125^\circ\text{C}$, $V_{CC} = 900\text{ V}$			105 185	mJ mJ				
$R_{CC'} + EE'$	terminal chip, $T_j = 125^\circ\text{C}$		0,25		$\text{m}\Omega$				
L_{CE}	top, bottom		7,5		nH				
C_{CHC}	per phase, AC-side		2,8		nF				
Inverse diode									
$V_F = V_{EC}$	$I_F = 300\text{ A}$, $T_j = 25 (125)^\circ\text{C}$		2,1 (1,9)	2,6	V				
V_{TO}	$T_j = 25 (125)^\circ\text{C}$		1,3 (1)	1,4 (1,1)	V				
r_T	$T_j = 25 (125)^\circ\text{C}$		2,5 (3)	3,4 (3,9)	$\text{m}\Omega$				
E_{rr}	$I_C = 350\text{ A}$, $V_{CC} = 600\text{ V}$ $T_j = 125^\circ\text{C}$, $V_{CC} = 900\text{ V}$			12 15	mJ mJ				
Mechanical data									
M_{dc}	DC terminals, SI Units	6		8	Nm				
M_{ac}	AC terminals, SI Units	13		15	Nm				
w	SKiiP® 2 System w/o heat sink		3,5		kg				
w	heat sink		8,5		kg				
Thermal characteristics (P16 heat sink; 275m^3/h); "r" reference to temperature sensor									
$R_{th(j-s)I}$	per IGBT			0,064	K/W				
$R_{th(j-s)D}$	per diode			0,188	K/W				
$R_{th(s-a)}$	per module			0,033	K/W				
Z_{th}	R_i (mK/W) (max. values)			$\tau_{th}(s)$					
	1	2	3	4	1	2	3	4	
$Z_{th(j-r)I}$		7	50	8	0	1	0,13	0,001	1
$Z_{th(j-r)D}$		21	144	23	0	1	0,13	0,001	1
$Z_{th(r-a)}$		1,6	22	7	2,4	494	165	20	0,03

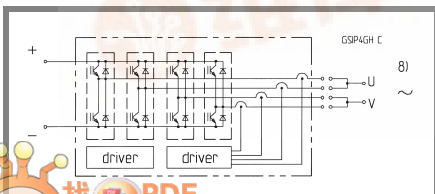

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee, expressed or implied is made regarding delivery, performance or suitability.



SKiiP 432GH120-4D



SKiiP[®] 2

Absolute Maximum Ratings		$T_a = 25\text{ °C}$ unless otherwise specified	
Symbol	Conditions	Values	Units
V_{S1}	stabilized 15 V power supply	18	V
V_{S2}	unstabilized 24 V power supply	30	V
V_{iH}	input signal voltage (high)	15 + 0,3	V
dv/dt	secondary to primary side	75	kV/ μ s
V_{isolIO}	input / output (AC, r.m.s., 2s)	3000	Vac
V_{isol12}	output 1 / output 2 (AC, r.m.s., 2s)	1500	Vac
f_{sw}	switching frequency	20	kHz
f_{out}	output frequency for $I=I_C$; sin.	1	kHz
T_{op} (T_{stg})	operating / storage temperature	- 40 ... + 85	°C

4-pack - integrated intelligent Power System

4-pack integrated gate driver

SKiiP 432GH120-4D


Gate driver features

- Two separate and independent "GB"-type driver
- CMOS compatible inputs
- Wide range power supply
- Integrated circuitry to sense phase current, heat sink temperature and DC-bus voltage (option)
- U-option is integrated on left driver, (DC terminals at bottom; refer to case drawing)
- Short circuit protection
- Over current protection
- Over voltage protection (option)
- Power supply protected against under voltage
- Interlock of top/bottom switch
- Isolation by transformer
- Fibre optic interface (option)
- IEC 60068-1 (climate) 25/85/56

Characteristics		$(T_a = 25\text{ °C})$			
Symbol	Conditions	min.	typ.	max.	Units
V_{S1}	supply voltage stabilized	14,4	15	15,6	V
V_{S2}	supply voltage non stabilized	20	24	30	V
I_{S1}	$V_{S1} = 15\text{ V}$	$210+320*f/f_{max}+1,3*(I_{AC}/A)$			mA
I_{S2}	$V_{S2} = 24\text{ V}$	$160+220*f/f_{max}+1,0*(I_{AC}/A)$			mA
V_{iT+}	input threshold voltage (High)	12,3			V
V_{iT-}	input threshold voltage (Low)	4,6			V
R_{IN}	input resistance	10			k Ω
$t_{d(on)IO}$	input-output turn-on propagation time	1,5			μ s
$t_{d(off)IO}$	input-output turn-off propagation time	1,4			μ s
$t_{pERRRESET}$	error memory reset time	9			μ s
t_{TD}	top / bottom switch : interlock time	3,3			μ s
$I_{analogOUT}$	8 V corresponds to max. current of 15 V supply voltage (available when supplied with 24 V)	400			A
$I_{Vs1outmax}$	output current at pin 12/14	50			mA
I_{A0max}	output current at pin 12/14	5			mA
V_{OI}	logic low output voltage	0,6			V
V_{OH}	logic high output voltage	30			V
I_{TRIPSC}	over current trip level ($I_{analog OUT} = 10\text{ V}$)	500			A
I_{TRIPLG}	ground fault protection	120			A
T_{tp}	over temperature protection	110			°C
U_{DCTRIP}	trip level of U_{DC} -protection ($U_{analog OUT} = 9\text{ V}$); (option)	900			V

For electrical and thermal design support please use SEMISEL.
Access to SEMISEL is via SEMIKRON website <http://www.semikron.com>.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee, expressed or implied is made regarding delivery, performance or suitability.

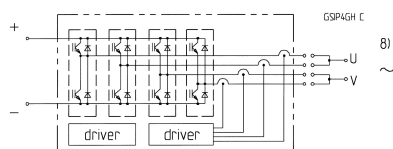

Case S 5