

## LED Lamp


GL3□□44 series

## GL3□□44 series

ø3mm(T-1), Cylinder Type,  
Colorless Transparency LED  
Lamps for Backlight/Indicator


## ■ Outline Dimensions

(Unit : mm)

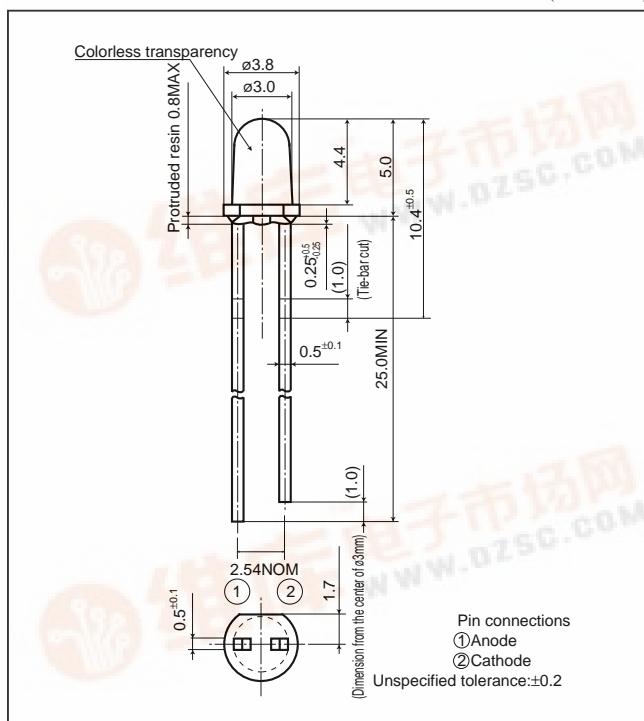

## ■ Radiation Diagram

(Ta=25°C)

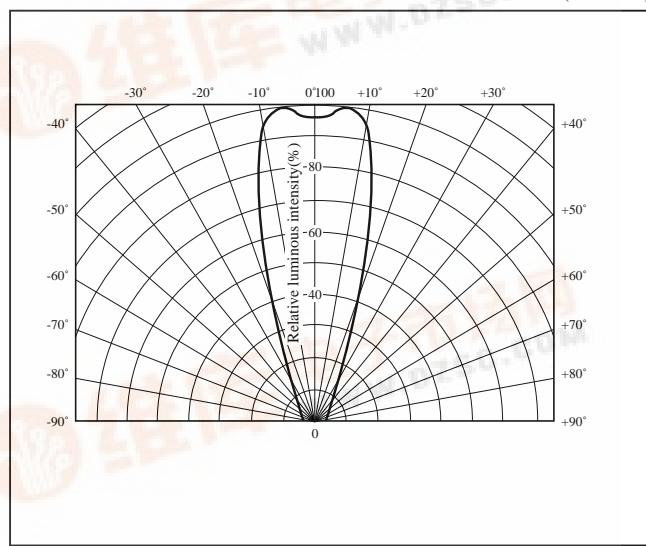

## ■ Absolute Maximum Ratings

(Ta=25°C)

Model No.	Radiation color	Radiation material	Power dissipation P (mW)	Forward current If (mA)	Peak forward current If <sup>*1</sup> (mA)	Derating factor (mA/°C)		Reverse voltage V <sub>R</sub> (V)	Operating temperature T <sub>opr</sub> (°C)	Storage temperature T <sub>stg</sub> (°C)	Soldering temperature T <sub>sol</sub> <sup>*2</sup> (°C)
						DC	Pulse				
GL3PR44	Red	GaP	23	10	50	0.13	0.67	5	-25 to +85	-25 to +100	260
GL3HD44	Red	GaAsP on GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL3HS44	Sunset orange	GaAsP on GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL3HY44	Yellow	GaAsP on GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL3EG44	Yellow-green	GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260
GL3KG44	Green	GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260

\*1 Duty ratio=1/10, Pulse width=0.1ms

\*2 5s or less(At the position of 1.6mm or more from the bottom face of resin package)

## ■ Electro-optical Characteristics

(Ta=25°C)

Lens type	Model No.	Forward voltage V <sub>F</sub> (V)		Peak emission wavelength λ <sub>p</sub> (nm)		Luminous intensity I <sub>V</sub> (med) TYP		Spectrum radiation bandwidth Δλ(nm) TYP		Reverse current I <sub>R</sub> (μA) MAX		Terminal capacitance C <sub>t</sub> (pF) TYP		Page for characteristics diagrams
		TYP	MAX	TYP	TYP	I <sub>V</sub> (med) TYP	I <sub>F</sub> (mA)	Δλ(nm) TYP	I <sub>F</sub> (mA)	I <sub>R</sub> (μA) MAX	V <sub>R</sub> (V)	(MHz)		
Colorless transparency	GL3PR44	1.9	2.3	695	5	12	5	100	5	10	4	55	1	→
	GL3HD44	2.0	2.8	635	20	110	20	35	20	10	4	20	1	→
	GL3HS44	2.0	2.8	610	20	100	20	35	20	10	4	15	1	→
	GL3HY44	2.0	2.8	585	20	100	20	30	20	10	4	35	1	→
	GL3EG44	2.1	2.8	565	20	130	20	30	20	10	4	35	1	→
	GL3KG44	2.1	2.8	555	20	60	20	25	20	10	4	40	1	→







(Notice) In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

(Notice) Please refer to the "Device Specification Sheets" for the latest information on the device.









# LED Lamp Characteristics Diagrams

## PR series

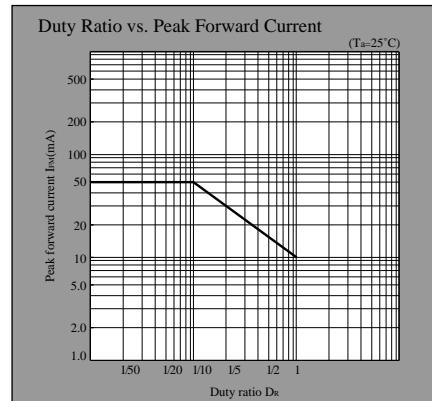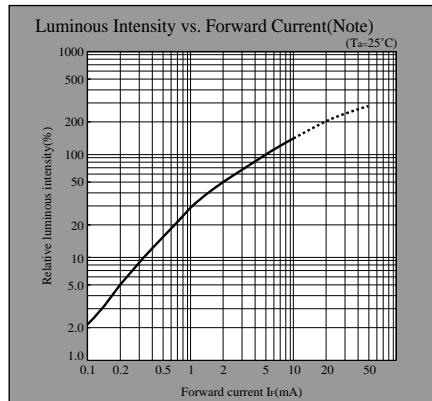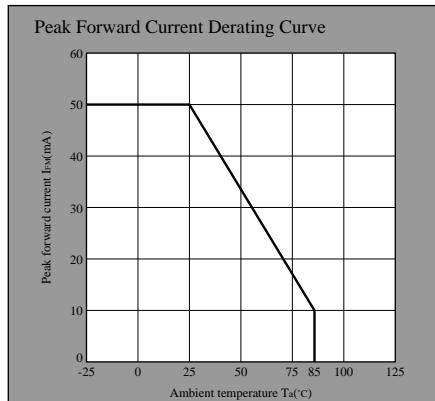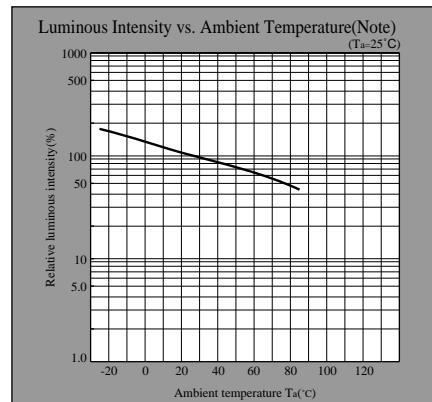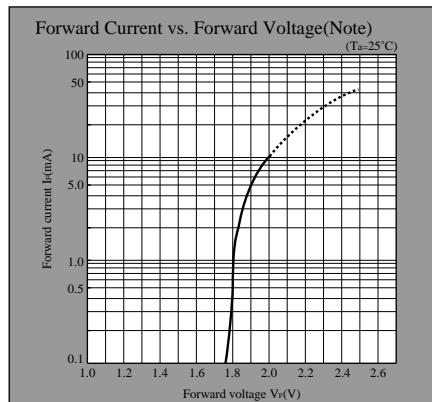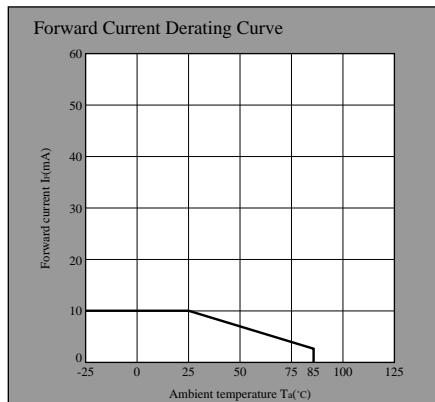

## HD series

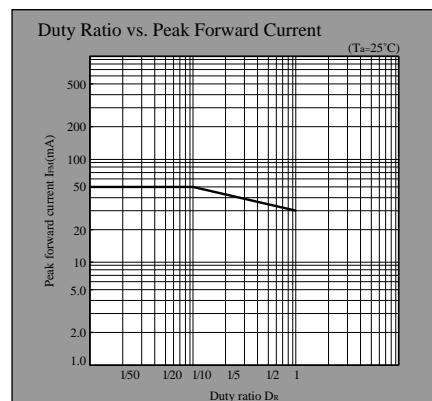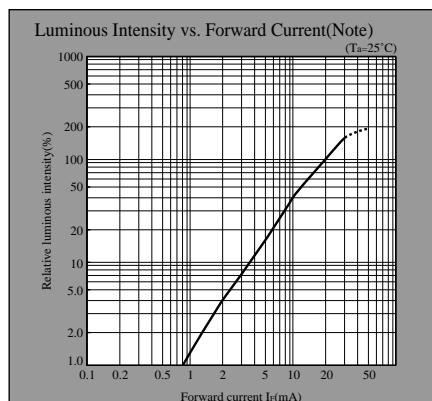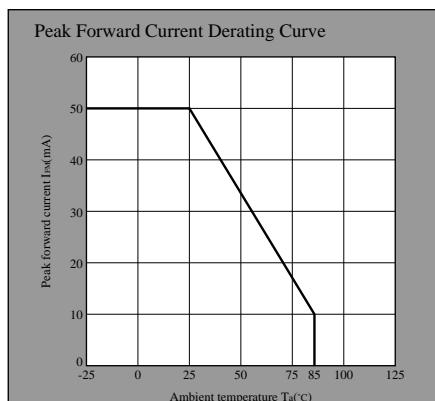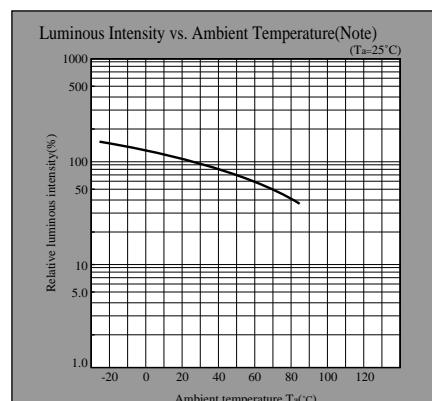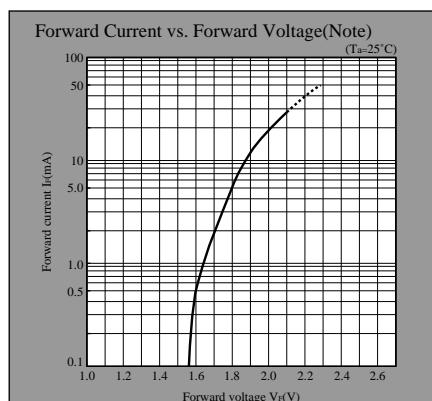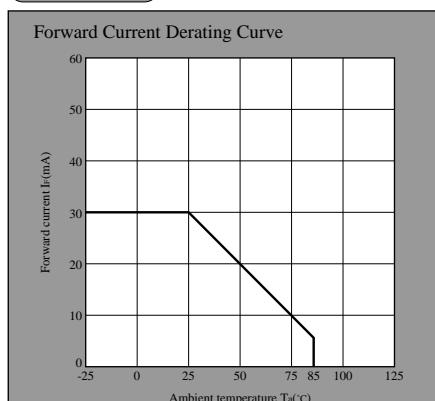







Note) Characteristics shown in diagrams are typical values. (not assurance value)

(Notice) ● In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.







(Note) ● Data for the characteristics in these diagrams is typical. (Ambient temperature: 25°C, forward current: 10 mA, reverse voltage: 100 mA)

# LED Lamp Characteristics Diagrams

## HS series

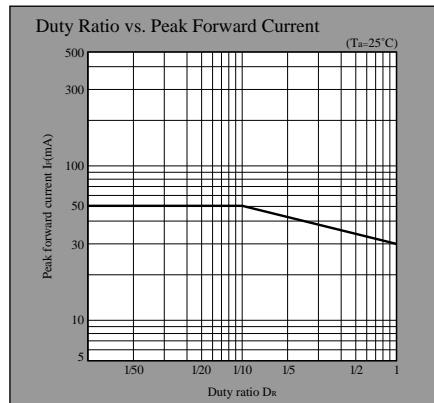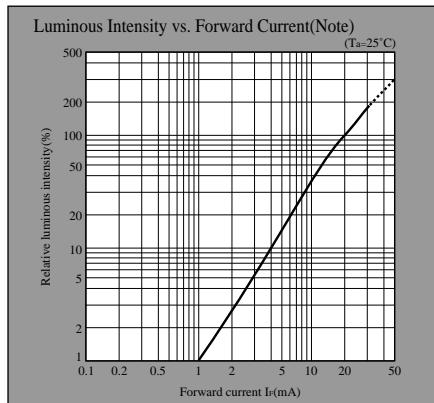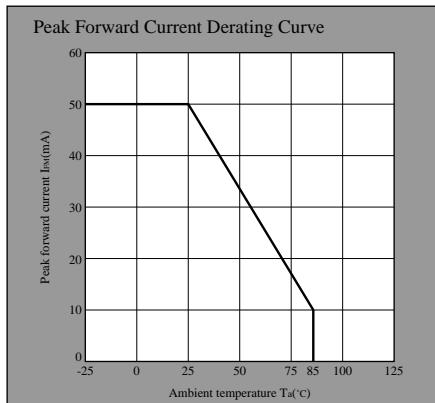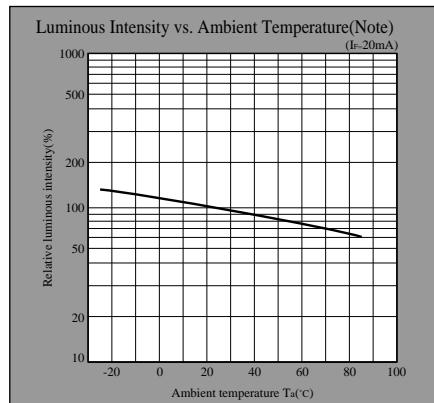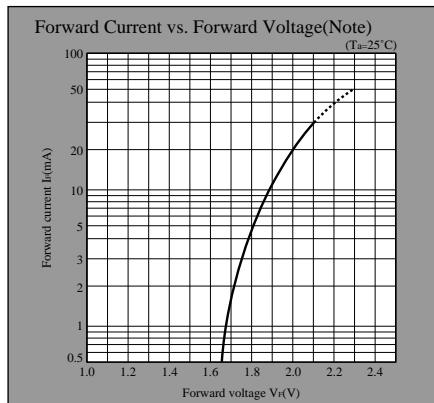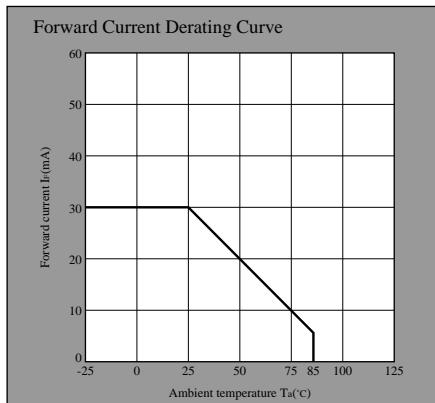

## HY series

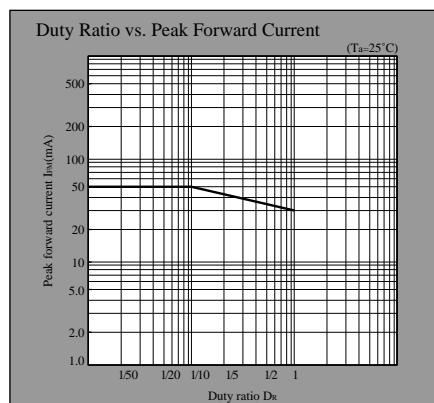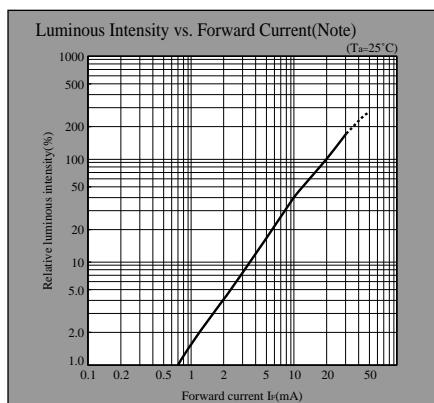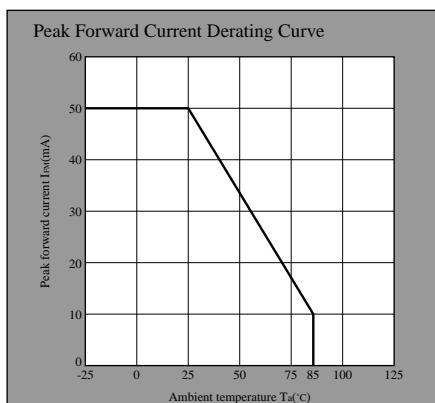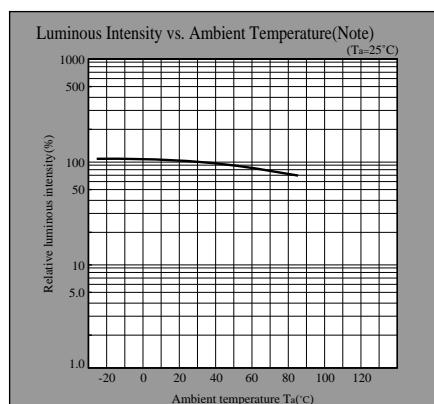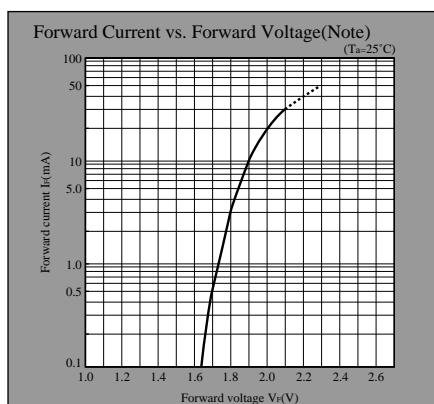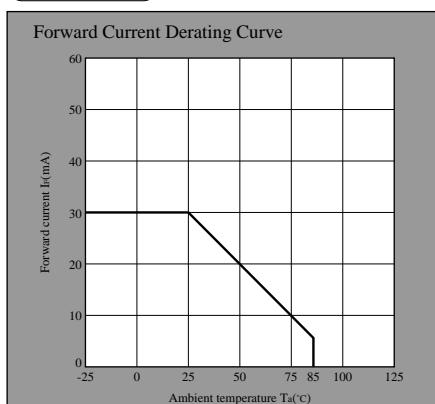


Note) Characteristics shown in diagrams are typical values. (not assurance value)

(Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.


(Notice) • Due to the characteristics of the device, it is recommended to use it at a maximum ambient temperature of 40°C. Use under the "over-temperature protection" function.

# LED Lamp Characteristics Diagrams

## EG series

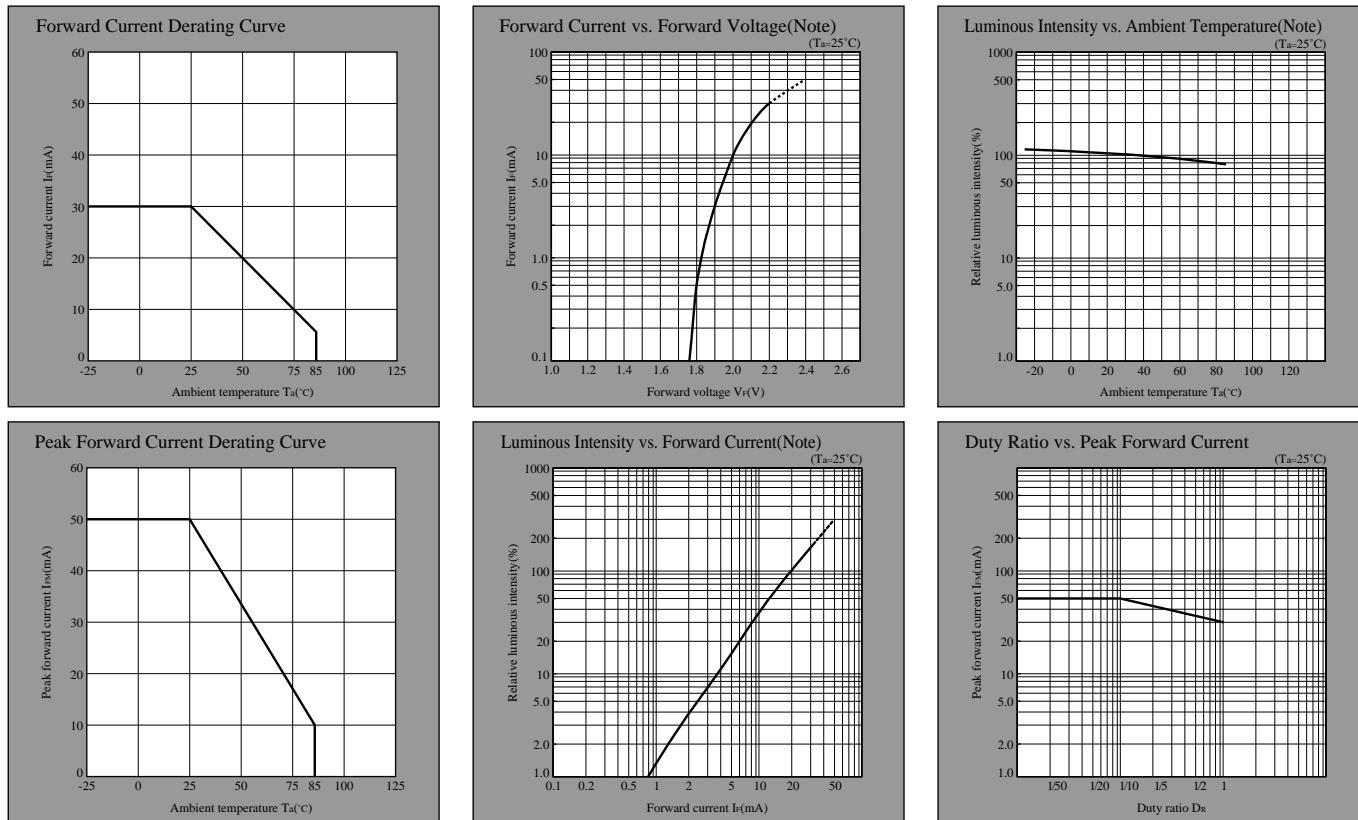

## KG series

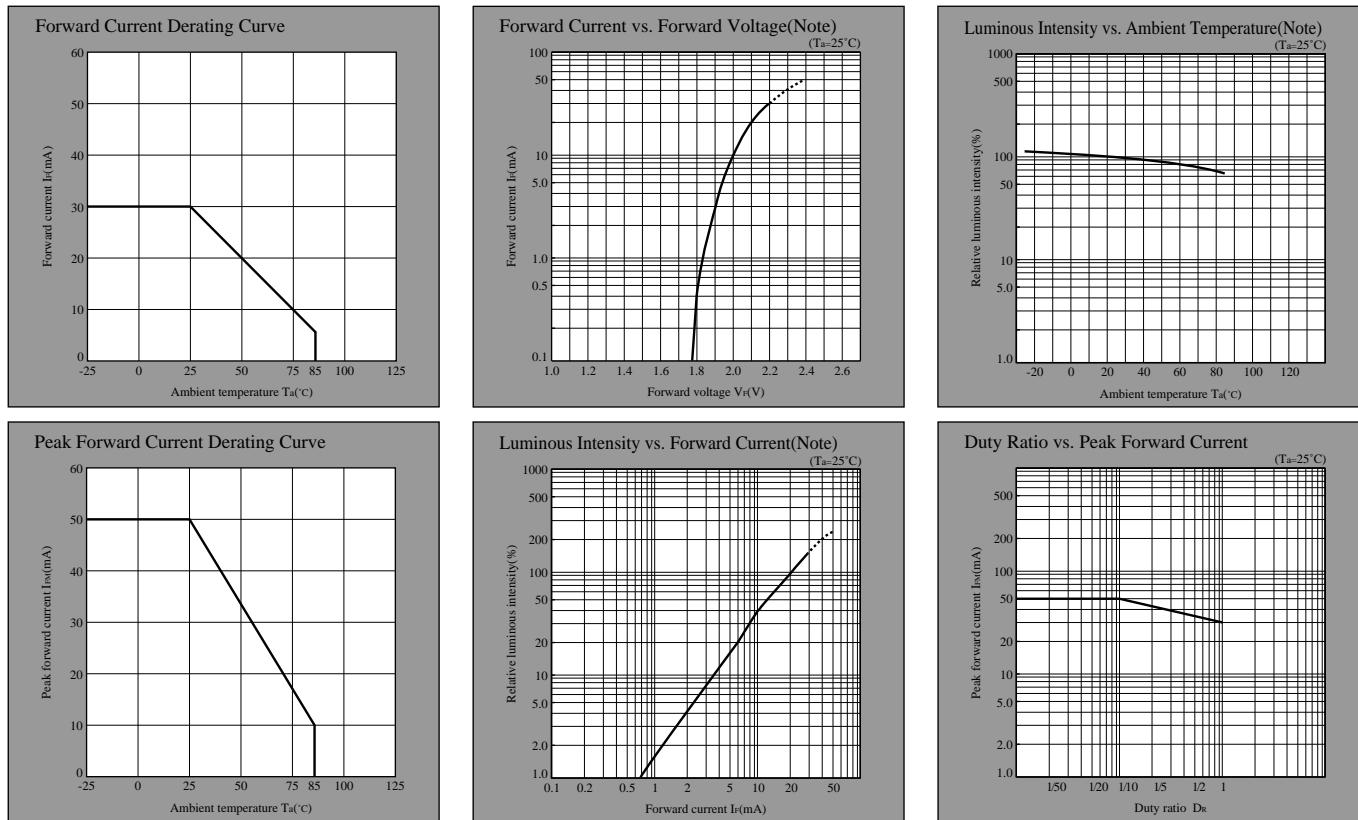

Note) Characteristics shown in diagrams are typical values. (not assurance value)

(Notice) 

- In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

(Note) 

- Peak forward current  $I_{fs}$  is the maximum current that can be sustained for a short time period (typically 1 second) at a specified ambient temperature  $T_a$  and forward voltage  $V_f$ .