

LED Lamp


GL6EG26T/GL6EG27T

GL6EG26T/GL6EG27T

5.8X4.6mm, Oval Type(with Tie-bar),
Colored/Colorless Transparency, Wide
Viewing Angle LED Lamps for Outdoor Use


■ Outline Dimensions

(Unit : mm)

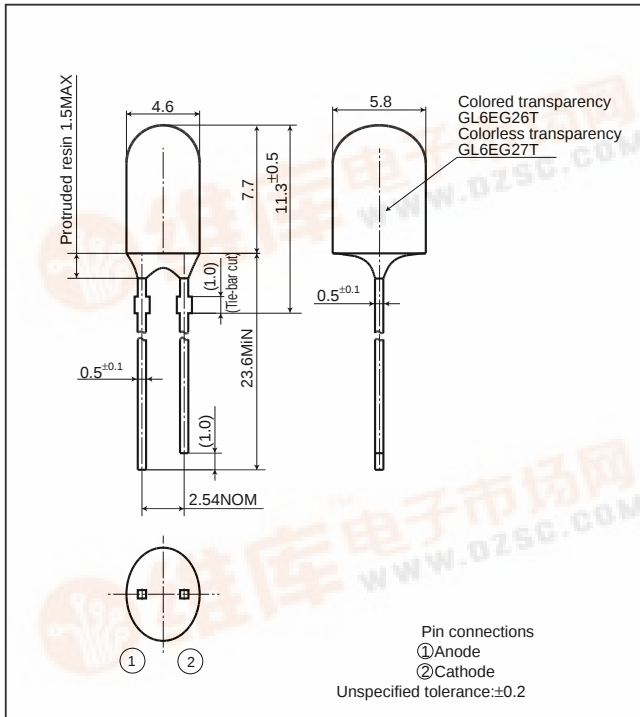

■ Radiation Diagram

(Ta=25°C)

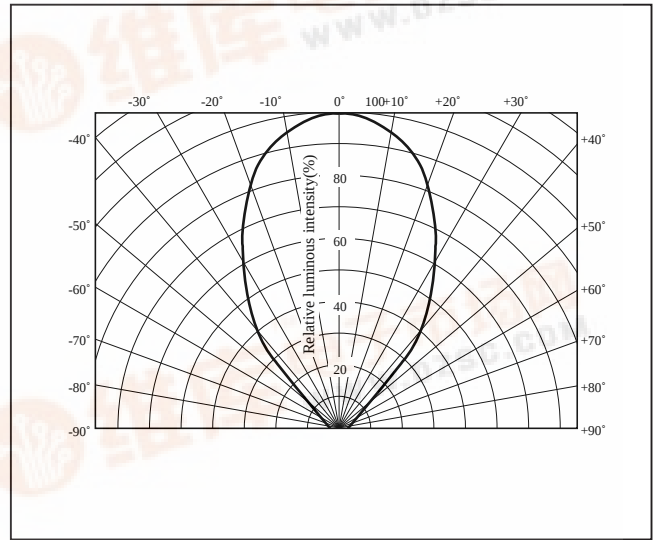

■ Absolute Maximum Ratings

(Ta=25°C)

Model No.	Radiation color	Radiation material	Power dissipation P (mW)	Forward current I _F (mA)	Peak forward current I _{FM} *1 (mA)	Derating factor (mA/°C)		Reverse voltage V _R (V)	Operating temperature T _{opr} (°C)	Storage temperature T _{stg} (°C)	Soldering temperature T _{sol} *2 (°C)
						DC	Pulse				
GL6EG26T GL6EG27T	Yellow-green	GaP	84	30	50	0.40	0.67	5	-25 to +85	-25 to +100	260

*1 Duty ratio=1/10, Pulse width=0.1ms

*2 5s or less(At the position of 1.6mm or more from the bottom face of resin package)







■ Electro-optical Characteristics

(Ta=25°C)

Lens type	Model No.	Forward voltage V _F (V)		Peak emission wavelength λ _p (nm)		Luminous intensity I _v (mcd)		Spectrum radiation bandwidth Δλ(nm)		Reverse current I _R (μA)		Terminal capacitance C _t (pF)		Page for characteristics diagrams
		TYP	MAX	TYP	I _F (mA)	TYP	I _F (mA)	TYP	I _F (mA)	MAX	V _R (V)	TYP	(MHz)	
Colored transparency	GL6EG26T	2.1	2.8	565	20	140	20	30	20	10	4	35	1	→
Colorless transparency	GL6EG27T													







LED Lamp Characteristics Diagrams

EG series

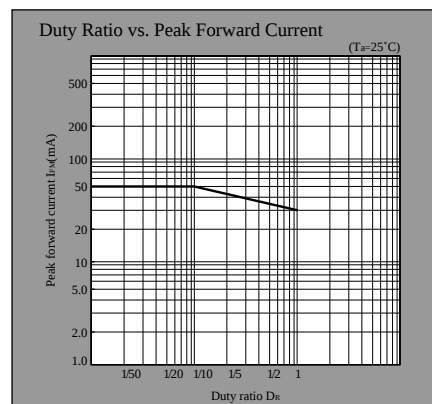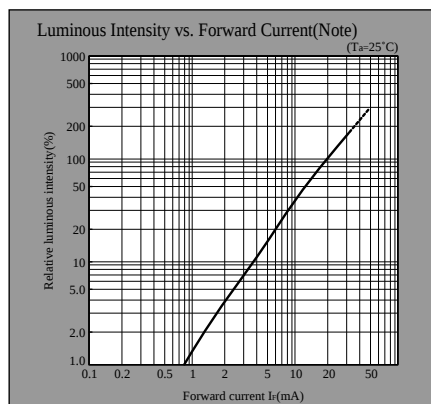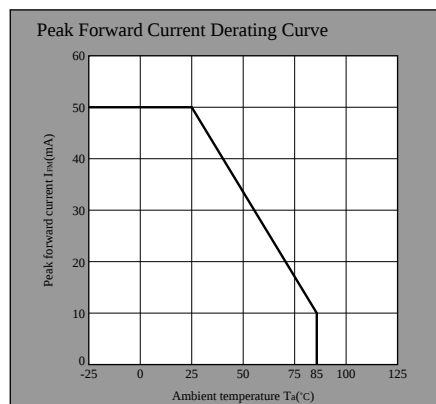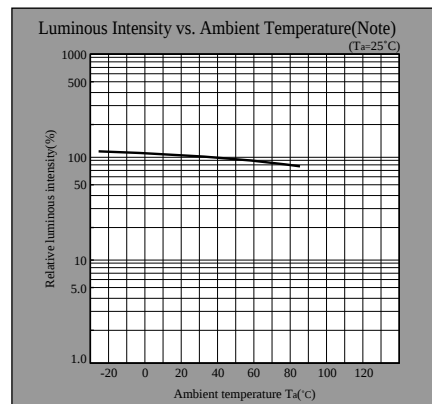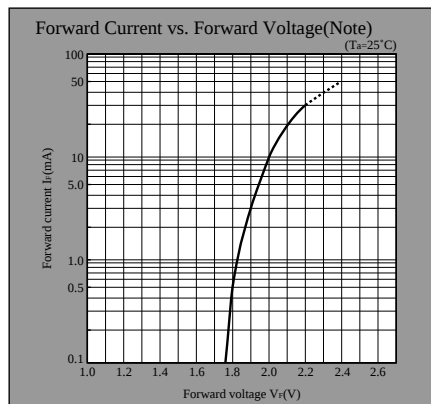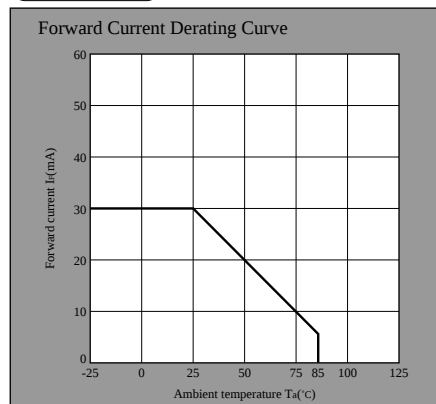

Note) Characteristics shown in diagrams are typical values. (not assurance value)

KG series

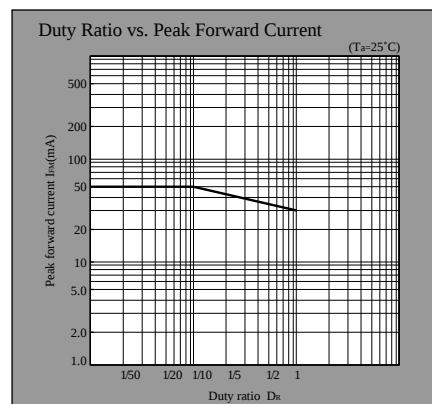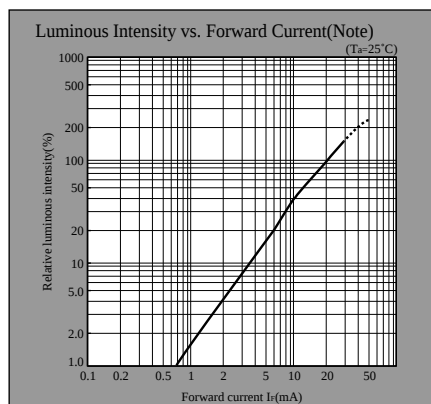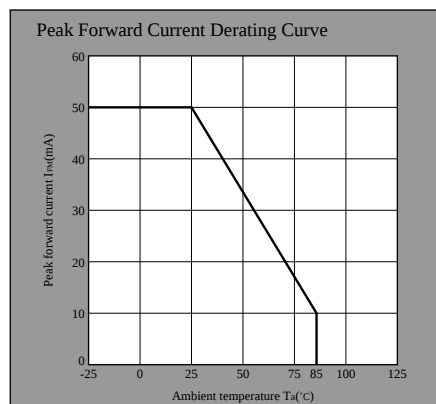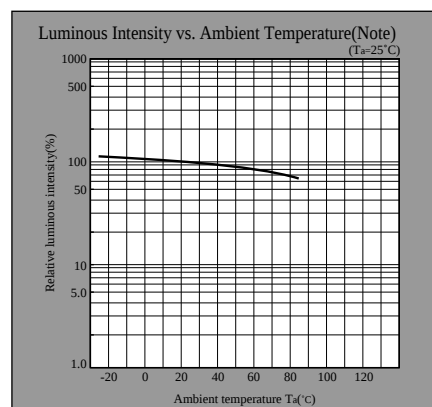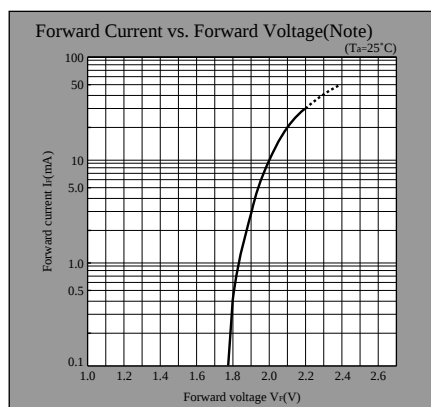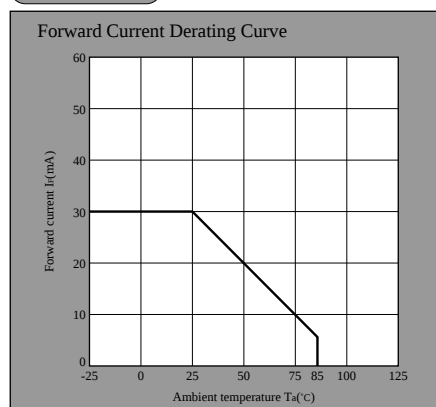

Note) Characteristics shown in diagrams are typical values. (not assurance value)