

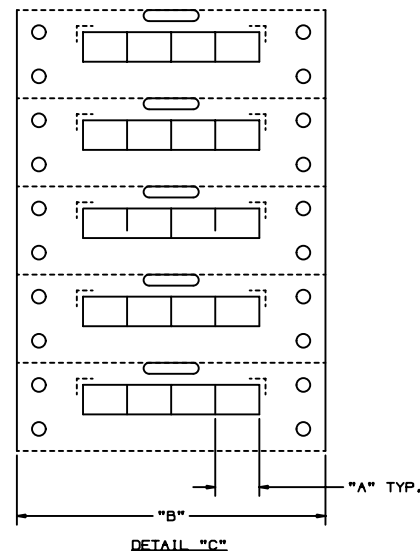
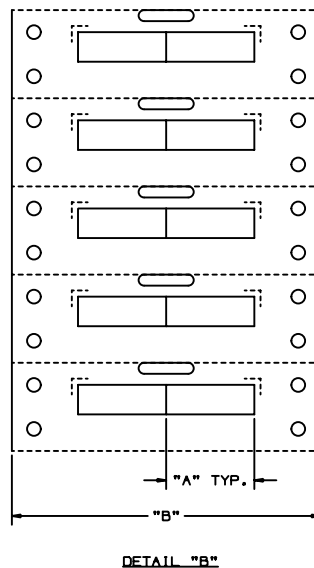


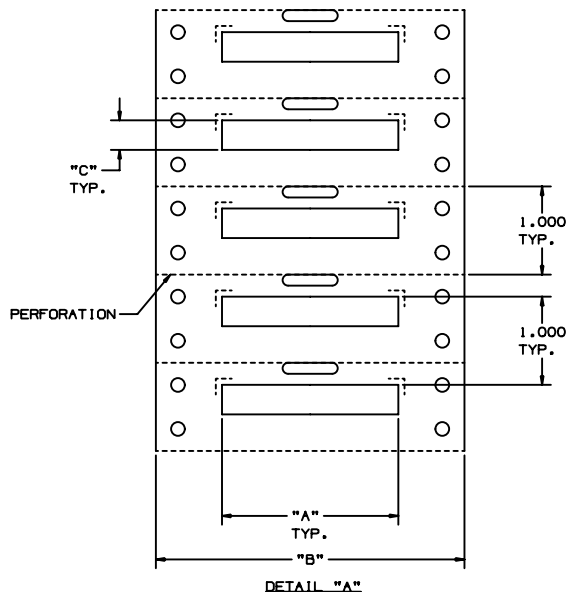

FINISHED PRODUCT
UNWIND DIRECTION
AWAY FROM LID OF BOX

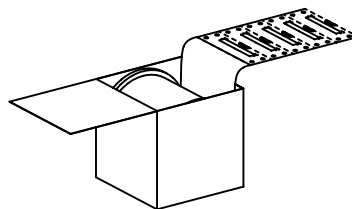

PART NUMBER	SEE DETAIL	"A"	"B"	"C"	MARKER ACROSS	TUBING COLOR
H200X034F1T	A	2.00	3.50	0.335	1	WHITE
H100X034F1T	B	1.00	3.50	0.335	2	WHITE
H050X034F1T	C	0.50	3.50	0.335	4	WHITE
H150X034F1T	A	1.50	3.50	0.335	1	WHITE
H075X034F1T	B	0.75	3.50	0.335	2	WHITE
H200X034F2T	A	2.00	3.50	0.335	1	YELLOW
H100X034F2T	B	1.00	3.50	0.335	2	YELLOW
H050X034F2T	C	0.50	3.50	0.335	4	YELLOW
H200X034F1T-B	A	2.00	3.50	0.335	1	WHITE
H100X034F1T-B	B	1.00	3.50	0.335	2	WHITE
H050X034F1T-B	C	0.50	3.50	0.335	4	WHITE

NOTE:
1. SEE MFG. DRAWING NO: A61183.

000472FK_C10220_HNUMX034F×T_00.PRT									
PANDUIT CORP. TINLEY PARK, ILLINOIS									
H***X034F** OPTIMUM COMPUTER PRINTABLE HEAT SHRINK MARKERS									
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.XX) ± .031 (1.000) ± .010 (.XX) ± .031 (1.000) ± .010									
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION									
SCALE NTS									
DATE 9-29-04									
GMHS									
C10220									
C									
REV DATE BY CHK DESCRIPTION ECN - R CUST SUP QM5H									