

**HCC40106B
HCF40106B**

HEX SCHMITT TRIGGERS

- SCHMITT-TRIGGER ACTION WITH NO EXTERNAL COMPONENTS
- HYSTERESIS VOLTAGE (TYP.) 0.9V AT $V_{DD} = 5V$, 2.3V AT $V_{DD} = 10V$ AND 3.5V AT $V_{DD} = 15V$
- NOISE IMMUNITY GREATER THAN 50%
- NO LIMIT ON INPUT RISE AND FALL TIME
- LOW V_{DD} TO V_{SS} CURRENT DURING SLOW INPUT RAMP
- STANDARDIZED SYMMETRICAL OUTPUT CHARACTERISTICS
- QUIESCENT CURRENT SPECIFIED AT 20V FOR HCC DEVICE
- 5V, 10V, AND 15V PARAMETRIC RATINGS
- INPUT CURRENT OF 100nA AT 18V AND 25°C FOR HCC DEVICE
- 100% TESTED FOR QUIESCENT CURRENT
- MEETS ALL REQUIREMENTS OF JEDEC TENTATIVE STANDARD N° 13A, "STANDARD SPECIFICATIONS FOR DESCRIPTION OF "B" SERIES CMOS DEVICES"




DESCRIPTION

The **HCC40106B** (extended temperature range) and **HCF40106B** (intermediate temperature range) are monolithic integrated circuits, available in 14-lead dual in-line plastic or ceramic package and plastic micropackage.


The **HCC/HCF40106B** consists of six Schmitt-trigger circuits. Each circuit functions as an inverter with Schmitt-trigger action on the input. The trigger switches at different points for positive and negative-going signals. The difference between the positive-going voltage (V_P) and the negative-going voltage (V_N) is defined as hysteresis voltage (V_H).

PIN CONNECTIONS

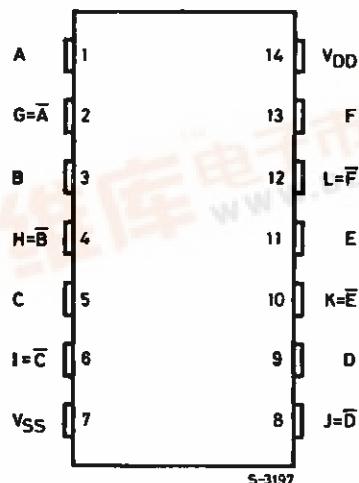

HCC/HCF40106B

FUNCTIONAL DIAGRAM

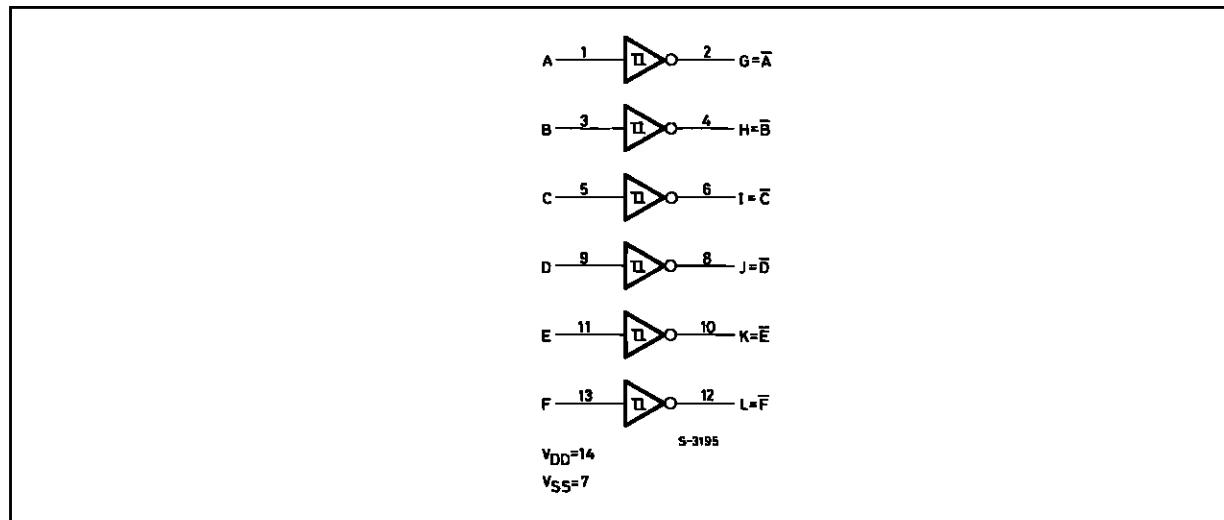

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{DD}^*	Supply Voltage : HCC Types HCF Types	– 0.5 to + 20 – 0.5 to + 18	V
V_i	Input Voltage	– 0.5 to V_{DD} + 0.5	V
I_i	DC Input Current (any one input)	± 10	mA
P_{tot}	Total Power Dissipation (per package) Dissipation per Output Transistor for T_{op} = Full Package-temperature Range	200 100	mW
T_{op}	Operating Temperature : HCC Types HCF Types	– 55 to + 125 – 40 to + 85	°C
T_{stg}	Storage Temperature	– 65 to + 150	°C


Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for external periods may affect device reliability.

* All voltage values are referred to V_{SS} pin voltage.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Value	Unit
V_{DD}	Supply Voltage : HCC Types HCF Types	3 to 18 3 to 15	V
V_i	Input Voltage	0 to V_{DD}	V
T_{op}	Operating Temperature : HCC Types HCF Types	– 55 to + 125 – 40 to + 85	°C

LOGIC DIAGRAM

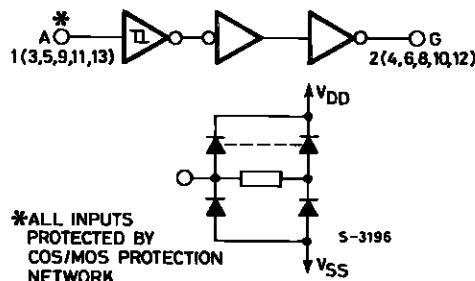

STATIC ELECTRICAL CHARACTERISTICS (over recommended operating conditions)

Symbol	Parameter	Test Conditions				Value						Unit	
		V _I (V)	V _O (V)	I _O (μA)	V _{DD} (V)	T _{Low} *		25°C			T _{High} *		
						Min.	Max.	Min.	Typ.	Max.	Min.	Max.	
I _L	Quiescent Current	0/ 5		5		1		0.02	1		30		μA
		0/10		10		2		0.02	2		60		
		0/15		15		4		0.02	4		120		
		0/20		20		20		0.04	20		600		
	HCF Types	0/ 5		5		4		0.02	4		30		
		0/10		10		8		0.02	8		60		
		0/15		15		16		0.02	16		120		
		0/ 5	< 1	5	4.95		4.95				4.95		
V _{OH}	Output High Voltage	0/10	< 1	10	9.95		9.95				9.95		V
		0/15	< 1	15	14.95		14.95				14.95		
		5/10	< 1	5		0.05			0.05		0.05		
V _{OL}	Output Low Voltage	10/0	< 1	10		0.05			0.05		0.05		V
		15/0	< 1	15		0.05			0.05		0.05		
				5	2.2	3.6	2.2	2.9	3.6	2.2	3.6		
V _P	Positive Trigger Threshold Voltage			10	4.6	7.1	4.6	5.9	7.1	4.6	7.1		V
				15	6.8	10.8	6.8	8.8	10.8	6.8	10.8		
				5	0.9	2.8	0.9	1.9	2.8	0.9	2.8		
V _N	Negative Trigger Threshold Voltage			10	2.5	5.2	2.5	3.9	5.2	2.5	5.2		V
				15	4	7.4	4	5.8	7.4	4	7.4		
				5	0.3	1.6	0.3	0.9	1.6	0.3	1.6		
V _H	Hysteresis Voltage			10	1.2	3.4	1.2	2.3	3.4	1.2	3.4		V
				15	1.6	5	1.6	3.5	5	1.6			

* T_{Low}= - 55°C for HCC device : - 40°C for HCF device.

* T_{High}= + 125°C for HCC device : + 85°C for HCF device.

HCC/HCF40106B

STATIC ELECTRICAL CHARACTERISTICS (continued)

Symbol	Parameter	Test Conditions				Value						Unit		
		V_I (V)	V_o (V)	$ I_{Io} $ (μ A)	V_{DD} (V)	T_{Low}^*		25°C			T_{High}^*			
						Min.	Max.	Min.	Typ.	Max.	Min.	Max.		
I_{OH}	Output Drive Current	HCC Types	0/ 5	2.5		5	- 2		- 1.6	- 3.2		- 1.15	mA	
			0/ 5	4.6		5	- 0.64		- 0.51	- 1		- 0.36		
			0/10	9.5		10	- 1.6		- 1.3	- 2.6		- 0.9		
			0/15	13.5		15	- 4.2		- 3.4	- 6.8		- 2.4		
	HCF Types		0/ 5	2.5		5	- 1.53		- 1.36	- 3.2		- 1.1		
			0/ 5	4.6		5	- 0.52		- 0.44	- 1		- 0.36		
			0/10	9.5		10	- 1.3		- 1.1	- 2.6		- 0.9		
			0/15	13.5		15	- 3.6		- 3.0	- 6.8		- 2.4		
I_{OL}	Output Sink Current	HCC Types	0/ 5	0.4		5	0.64		0.51	1		0.36	mA	
			0/10	0.5		10	1.6		1.3	2.6		0.9		
			0/15	1.6		15	4.2		3.4	6.8		2.4		
	HCF Types		0/ 5	0.4		5	0.52		0.44	1		0.36		
			0/10	0.5		10	1.3		1.1	2.6		0.9		
			0/15	1.5		15	3.6		3.0	6.8		2.9		
I_{IH}, I_{IL}^{**}	Input Leakage Current	HCC Types	0/18	Any Input	18		± 0.1		$\pm 10^{-5}$	± 0.1		± 1	μ A	
		HCF Types	0/15		15		± 0.3		$\pm 10^{-5}$	± 0.3		± 1		
C_I	Input Capacitance		Any Input						5	7.5			p	

* $T_{Low} = - 55^\circ\text{C}$ for HCC device : $- 40^\circ\text{C}$ for HCF device.


* $T_{High} = + 125^\circ\text{C}$ for HCC device : $+ 85^\circ\text{C}$ for HCF device.

DYNAMIC ELECTRICAL CHARACTERISTICS ($T_{amb} = 25^\circ\text{C}$, $C_L = 50\text{pF}$, $R_L = 200\text{k}\Omega$, typical temperature coefficient for all V_{DD} values is $0.3\%/\text{ }^\circ\text{C}$, all input rise and fall time = 20ns)


Symbol	Parameter	Test Conditions			Value			Unit	
		V_{DD} (V)	Min.	Typ.	Max.				
t_{PLH}, t_{PHL}	Propagation Delay Time		5			140	280	ns	
			10			70	140		
			15			60	120		
t_{THL}, t_{TLH}	Transition Time		5			100	200	ns	
			10			50	100		
			15			40	80		

HYSTERESIS DEFINITION, CHARACTERISTICS AND TEST SETUP


(a) Definition of V_P , V_N and V_H .

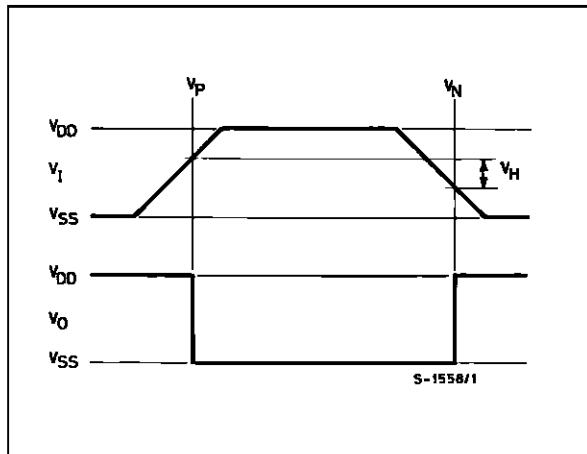


(b) Transfer Characteristic of 1 of 6 gates.

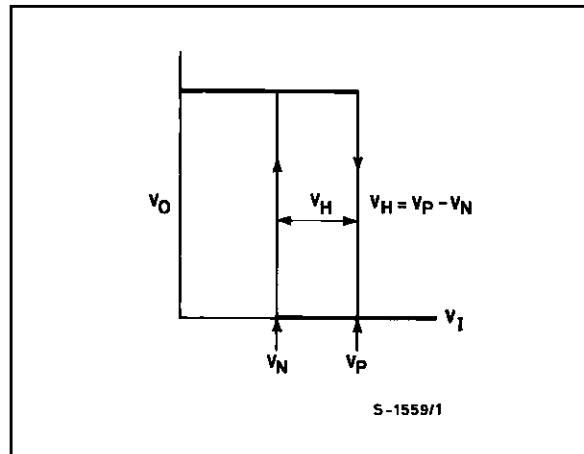



(c) Test Setup.

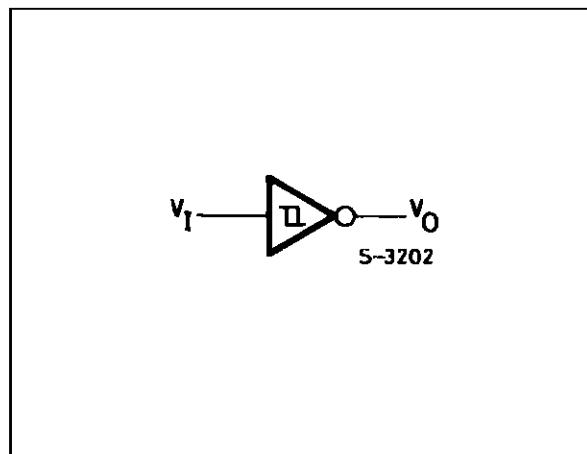

Input and Output Characteristics.

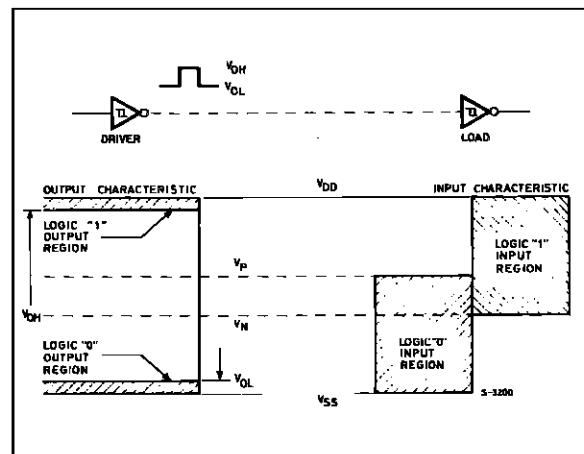



Typical Current Voltage Transfer Characteristics, and Test Circuit.

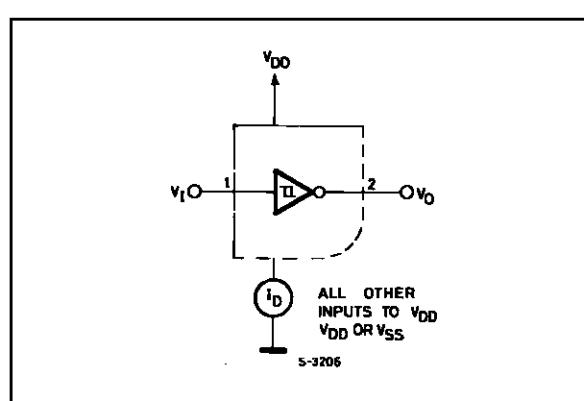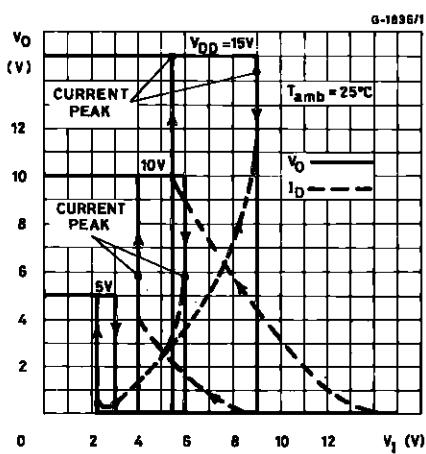


HCC/HCF40106B

HYSTERESIS DEFINITION, CHARACTERISTICS AND TEST SETUP


Typical Voltage Transfer Characteristics vs. Temperature, and Test Circuit.

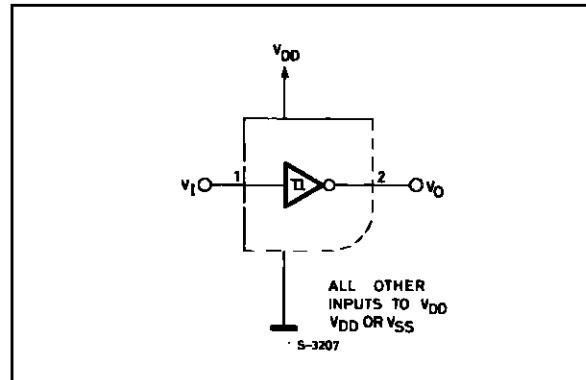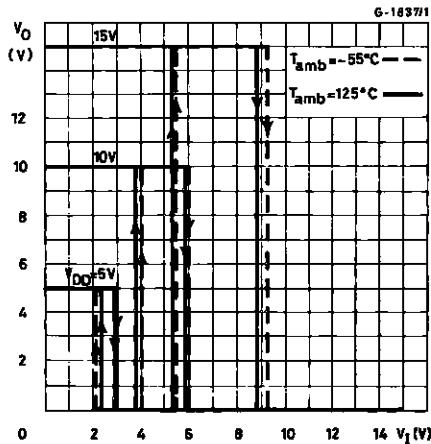


Typical Transition Time vs. Load Capacitance.

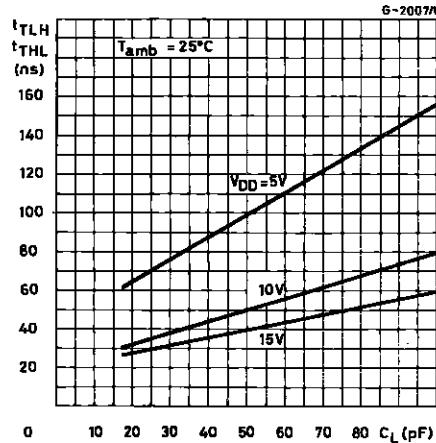


Output High (source) Current Characteristics.

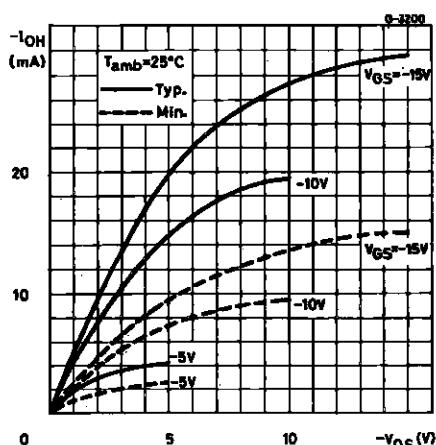

Output Low (sink) Current Characteristics.

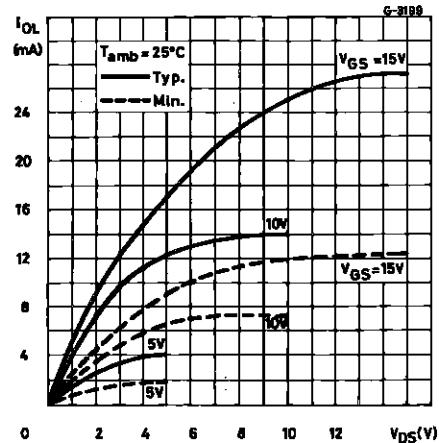


Typical Propagation Delay Time vs. Load Capacitance.

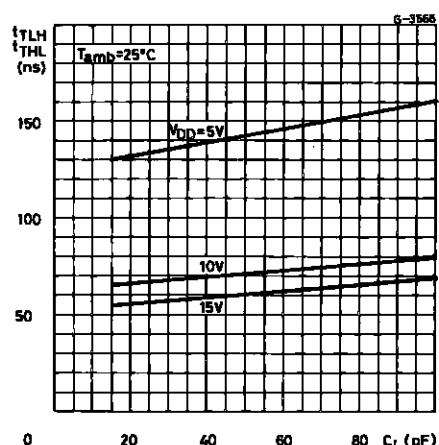


HCC/HCF40106B


Typical Trigger Threshold Voltage vs. Supply Voltage.

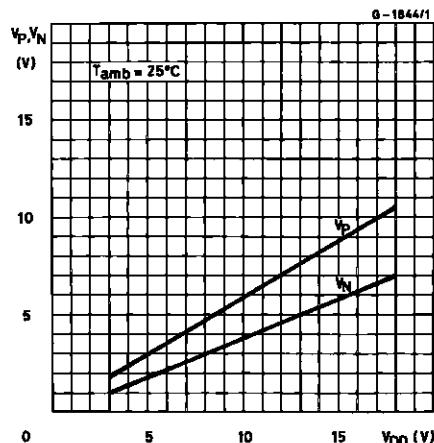


Typical Power Dissipation per Trigger vs. Input Frequency.

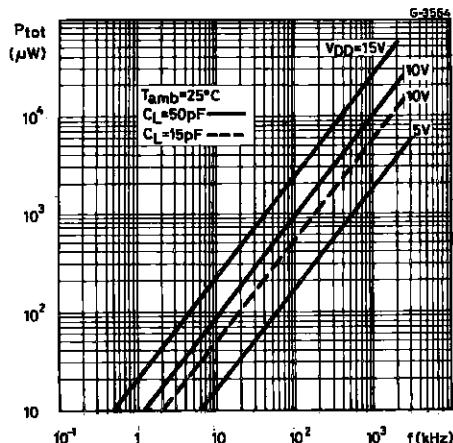

Typical per Cent Hysteresis vs. Supply Voltage.

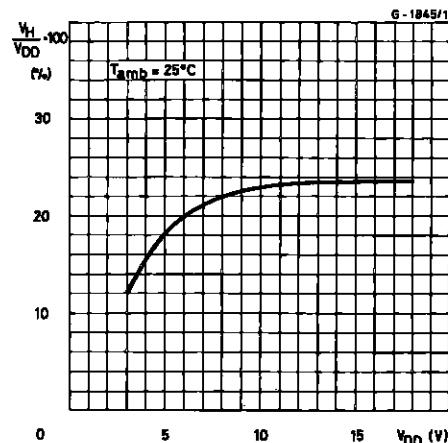


Typical Power Dissipation per Trigger vs. Input Frequency.

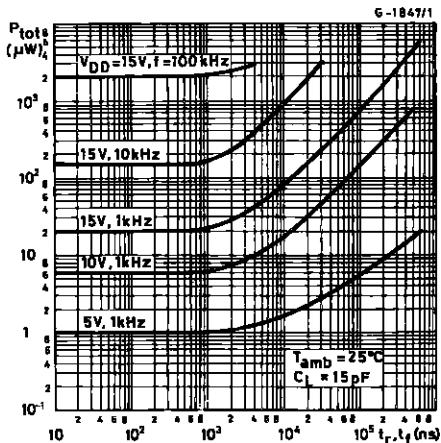


TYPICAL APPLICATIONS

ASTABLE MULTIVIBRATOR.

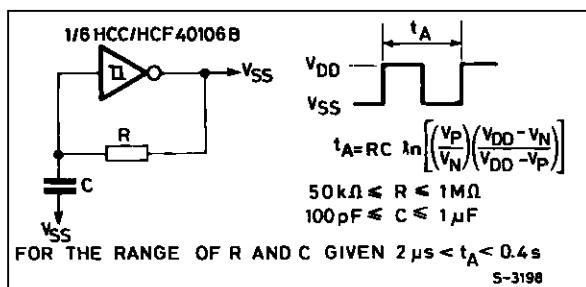


MONOSTABLE MULTIVIBRATOR.

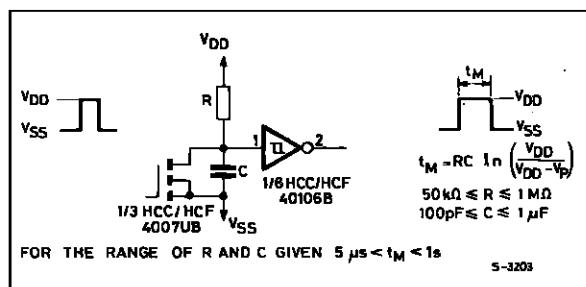

HCC/HCF40106B


TYPICAL APPLICATIONS (continued)

WAVE SHAPER.

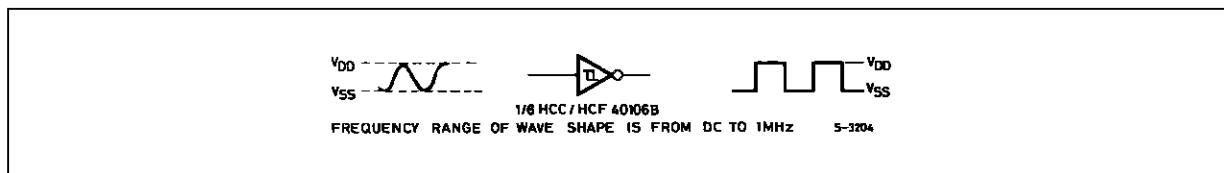


TEST CIRCUITS


Quiescent Device Current.

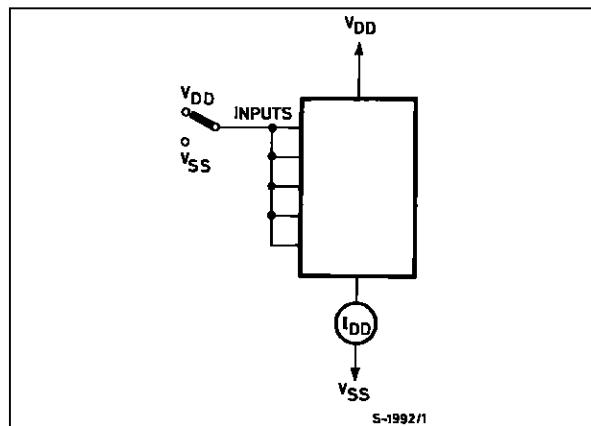

Dynamic Power Dissipation.

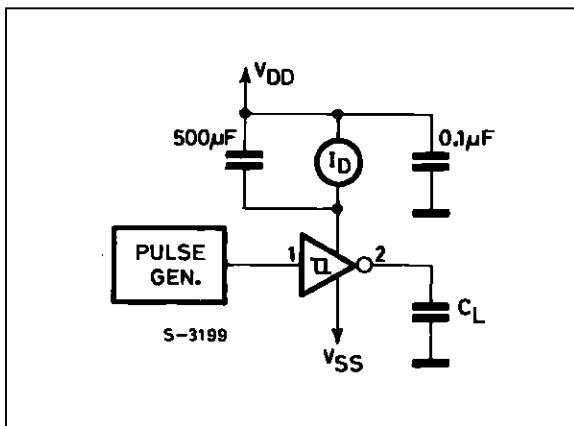


Input Current .

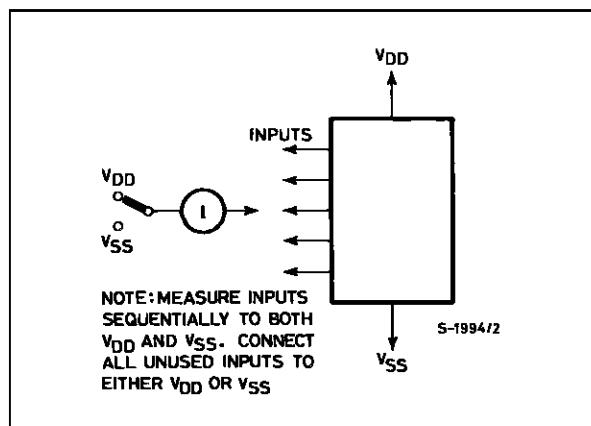

Plastic DIP14 MECHANICAL DATA


DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
a1	0.51			0.020		
B	1.39		1.65	0.055		0.065
b		0.5			0.020	
b1		0.25			0.010	
D			20			0.787
E		8.5			0.335	
e		2.54			0.100	
e3		15.24			0.600	
F			7.1			0.280
I			5.1			0.201
L		3.3			0.130	
Z	1.27		2.54	0.050		0.100

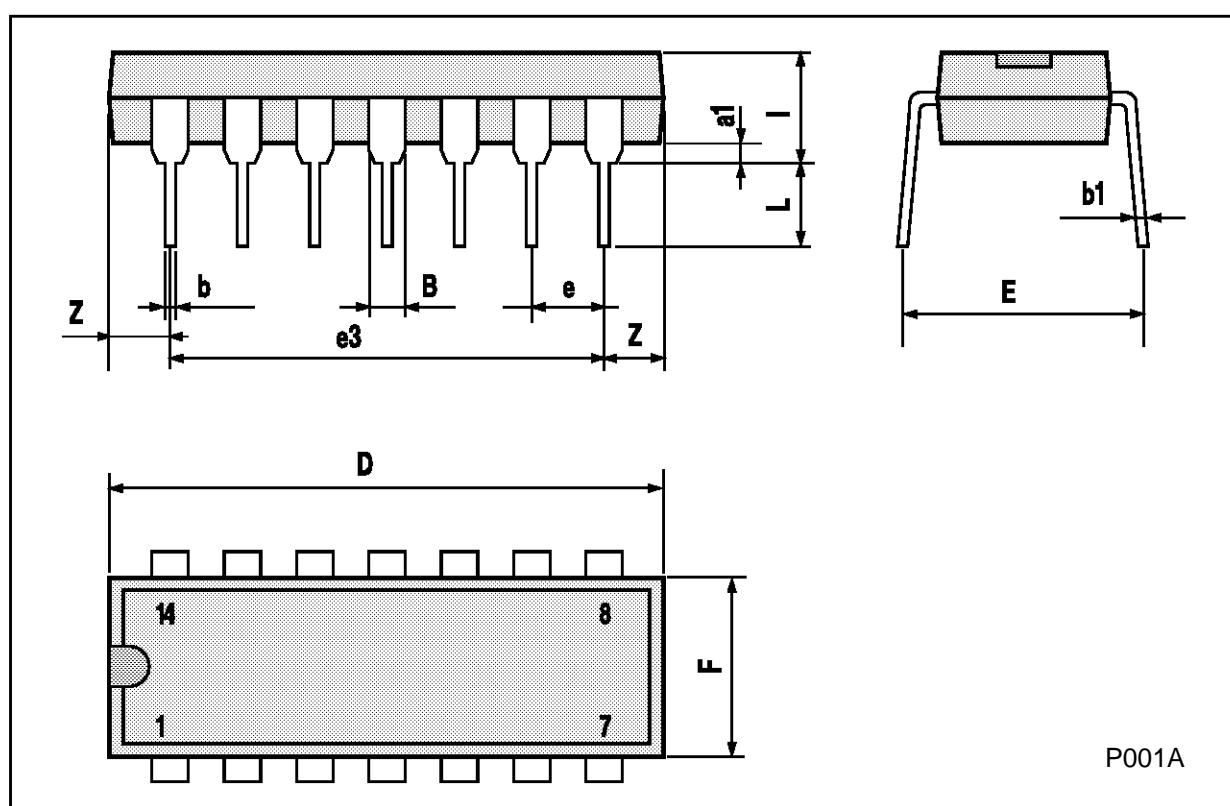

HCC/HCF40106B


Ceramic DIP14/1 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			20			0.787
B			7.0			0.276
D		3.3			0.130	
E	0.38			0.015		
e3		15.24			0.600	
F	2.29		2.79	0.090		0.110
G	0.4		0.55	0.016		0.022
H	1.17		1.52	0.046		0.060
L	0.22		0.31	0.009		0.012
M	1.52		2.54	0.060		0.100
N			10.3			0.406
P	7.8		8.05	0.307		0.317
Q			5.08			0.200

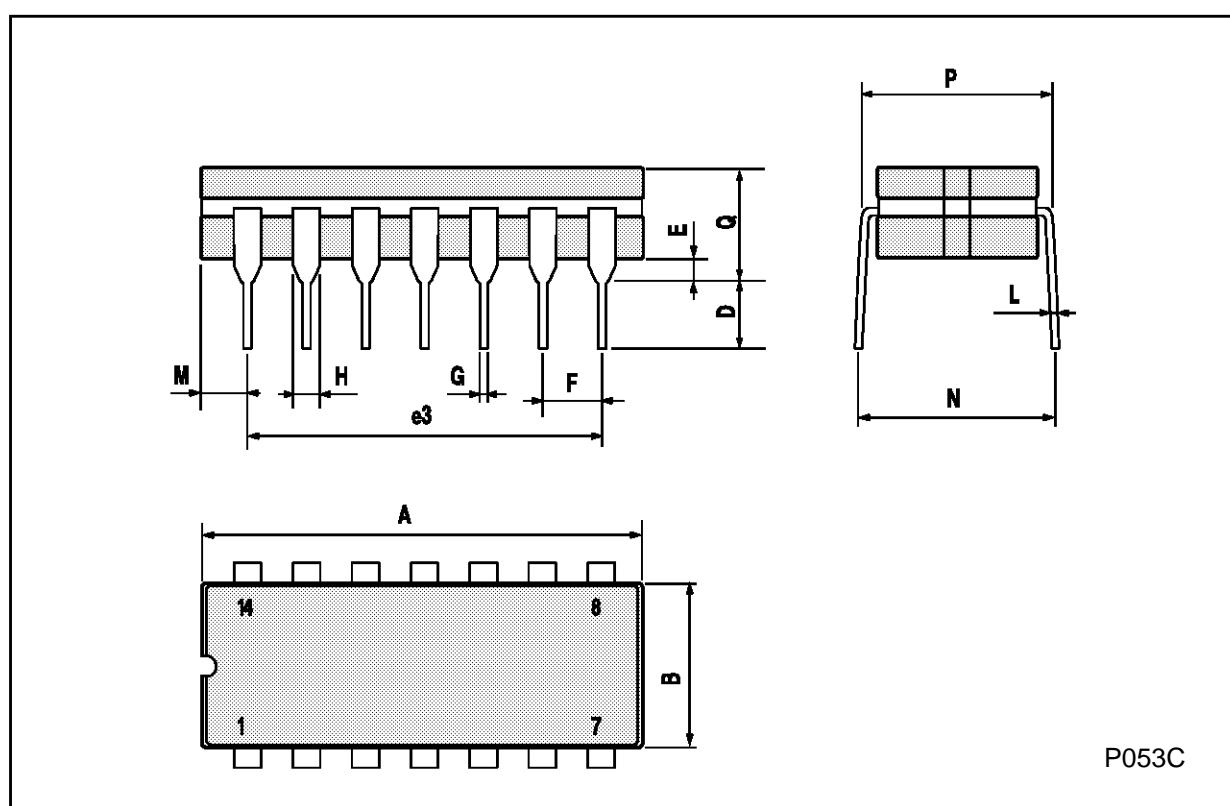

SO14 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			1.75			0.068
a1	0.1		0.2	0.003		0.007
a2			1.65			0.064
b	0.35		0.46	0.013		0.018
b1	0.19		0.25	0.007		0.010
C		0.5			0.019	
c1	45° (typ.)					
D	8.55		8.75	0.336		0.344
E	5.8		6.2	0.228		0.244
e		1.27			0.050	
e3		7.62			0.300	
F	3.8		4.0	0.149		0.157
G	4.6		5.3	0.181		0.208
L	0.5		1.27	0.019		0.050
M			0.68			0.026
S	8° (max.)					

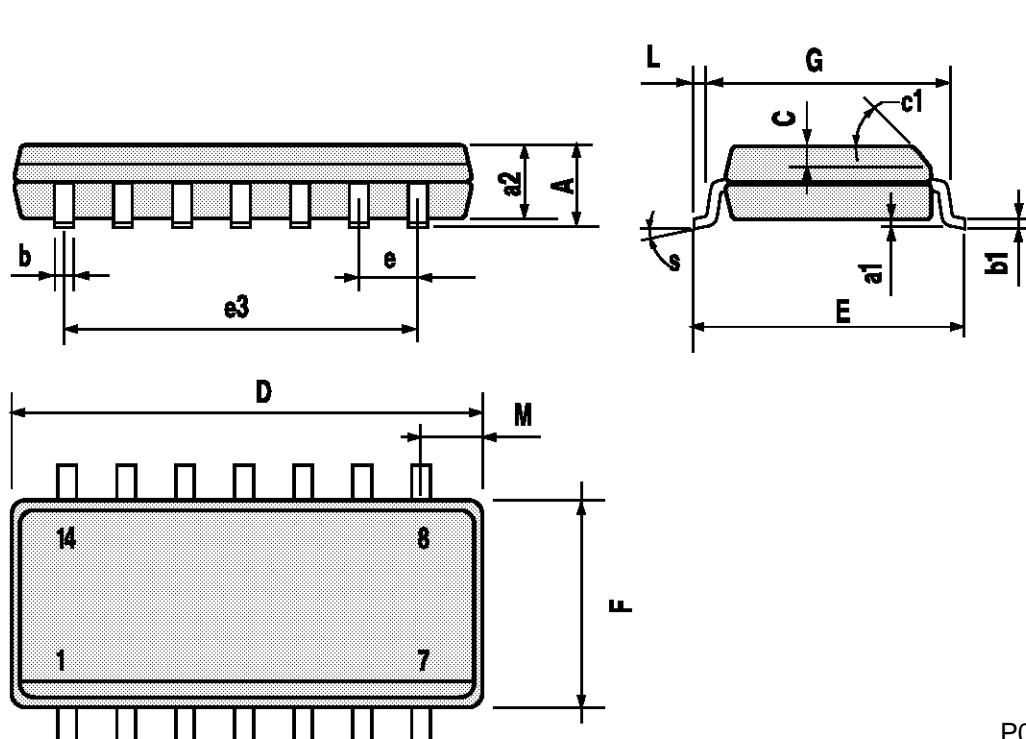


P013G

HCC/HCF40106B

PLCC20 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	9.78		10.03	0.385		0.395
B	8.89		9.04	0.350		0.356
D	4.2		4.57	0.165		0.180
d1		2.54			0.100	
d2		0.56			0.022	
E	7.37		8.38	0.290		0.330
e		1.27			0.050	
e3		5.08			0.200	
F		0.38			0.015	
G			0.101			0.004
M		1.27			0.050	
M1		1.14			0.045	

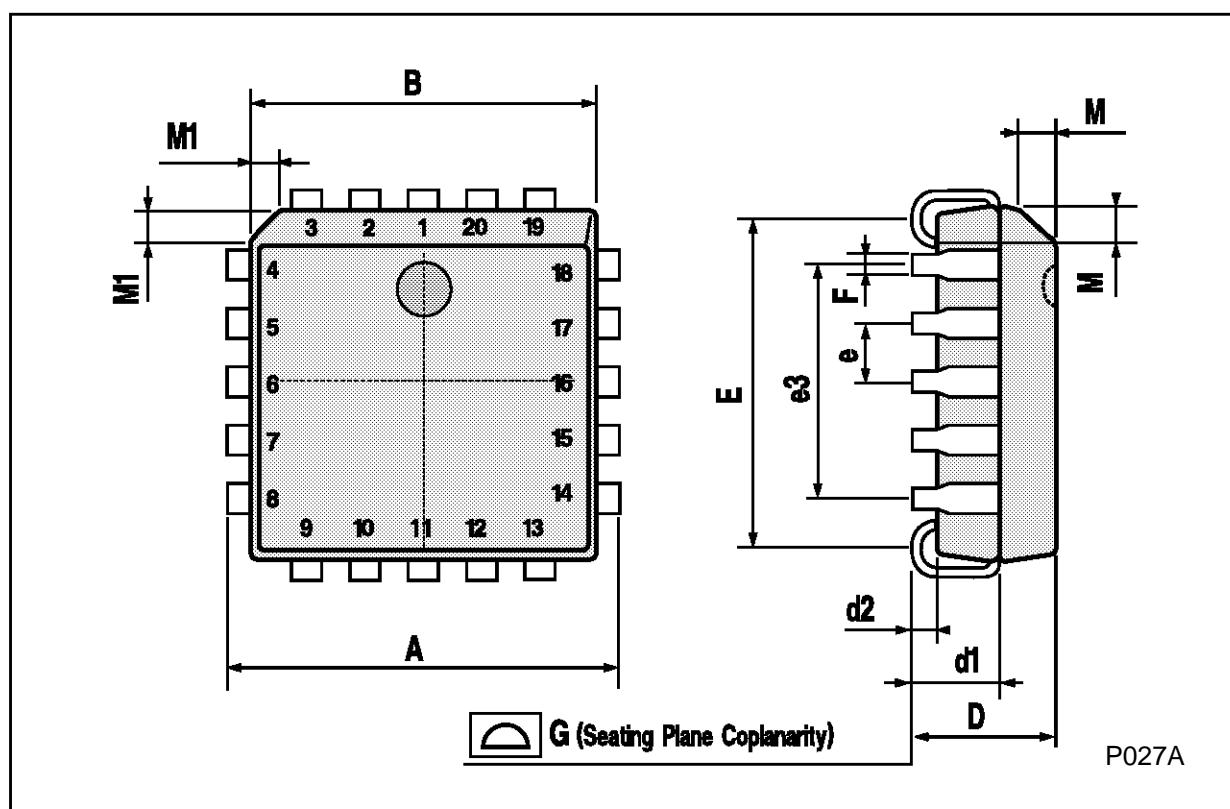

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES
Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A