

Ceramic High Pass Filter

NEW!
HFCN-740

900 to 2800 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	7W max. at 25°C


*Passband rating, derate linearly to 3W at 100°C ambient.

Pin Connections

RF IN	1**
RF OUT	3**
GROUND	2,4

**RF IN & RF OUT can be interchanged


Outline Drawing

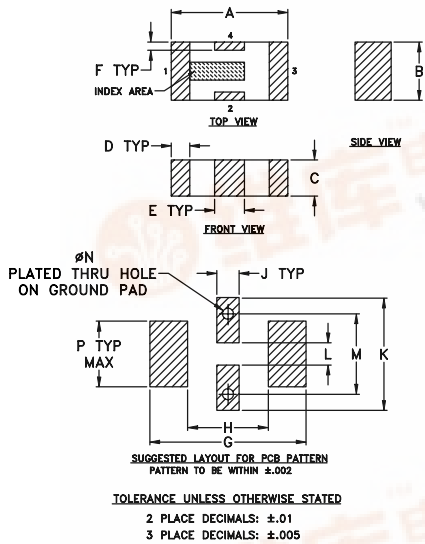

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	wt
.126	.063	.037	.020	.032	.009	.169	.087	.024	.122	.024	.087	.012	.071	grams
3.20	1.60	0.94	0.51	0.81	0.23	4.29	2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

Demo Board MCL P/N: TB-270 Suggested PCB Layout (PL-137)

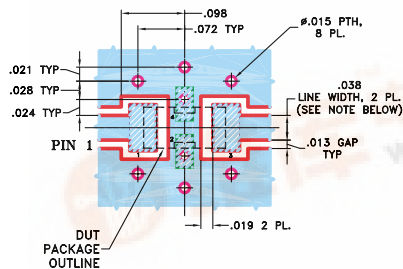

Features

- low cost
- small size
- 7 sections
- temperature stable
- dc block in/out, breakdown voltage, 1kV typ.
- excellent power handling, 7W

Applications

- sub-harmonic rejection and dc blocking
- transmitters/receivers
- lab use



BLUE CELL™

CASE STYLE: FV1206


Model	Price	Qty.
HFCN-740	\$1.99	(10-49)
HFCN-740D	\$2.49	(10-49)

High Pass Filter Electrical Specifications¹ (T_{AMB}=25°C)


MODEL NO.	STOP BAND (MHz)		f _{CO} , MHz Nom. Typ.	PASSBAND (MHz)		VSWR Typ. Frequency (MHz) 1.5:1	POWER INPUT (W)	NO. OF SECTIONS
	(loss>40 dB)	(loss>20 dB)		(loss<1.3 dB) Max.	(loss<2 dB) Typ.			
HFCN-740	430	550	740	900-2200	780-2800	20:1	7	7

1. For Applications requiring DC voltage to be applied to the Input or output, use HFCN-740D (DC Resistance to ground is 100 Mohms min.)

typical frequency response


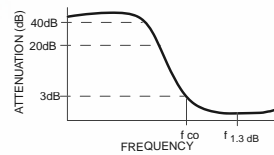


schematic

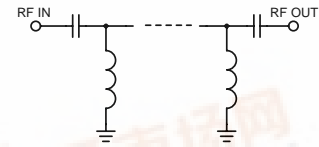

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.00	94.42	1737.18
435.00	44.43	66.82
575.00	19.61	17.22
780.00	1.77	1.52
900.00	1.03	1.47
1500.00	0.50	1.07
1900.00	0.62	1.62
2200.00	0.94	2.27
3000.00	2.57	4.45
4000.00	5.72	8.47

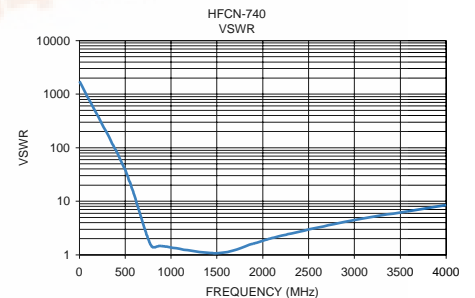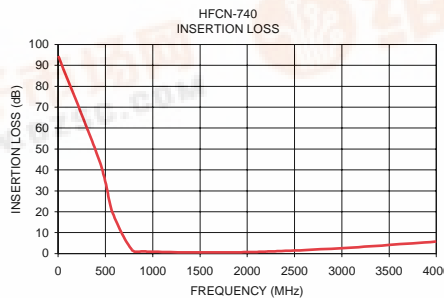

designers kit available

Kit No.	No. of Units in Kit	Description	Price \$ per Kit
K1-HFCN	40	5 of each: HFCN-650,-740,-1200,-1500,-1760,-2000,-2275,-2700	79.95

