

PRODUCT NUMBER: HML1213

DESCRIPTION: L2160 ELEMENT LINEARIMAGE SENSOR

ISSUE DATE: 24/05/1993

REVISED DATA: 24/04/1996

\*THIS SPECIFICATION ARE SUBJECT TO BE CHANGED  
WITHOUT NOTICE.

### **HUALON MICROELECTRONICS CORPORATION**

NO 1,R&D 4 TH RD. SCIENCE-BASED INDUSTRIAL PARK

HSIN-CHU CITY , TAIWAN .R.O.C

TEL:(02)25377811,25628813 FAX:(02)25313241

(03)5774945,5783221 (03) 5789569



# HML1213


## L2160 ELEMENTS LINEAR IMAGE SENSOR

### GENERAL DESCRIPTION

◆The HML1213 is a low dark current and high sensitive linear image sensor with 2160 elements of sensor which can read 8 line/mm (200DPI) across a B4 size paper.  
The sensor size is 14μm × 14μm on 14μm pitch. The device is operated by 12V power supply and 5V pulse of clock.  
The package is 22 pin cerdip which is made by high quality ceramic sealing with optical glass window.

### APPLICATIONS


- ◆ bar code reader.
- ◆ spectrum analyzer.
- ◆ Fax scanner.

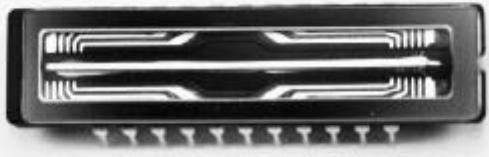

### FEATURES

- ◆ 2160'1 elements of image sensor.
- ◆ sensor size 14mm × 14mm on 14mm pitch.
- ◆ operation frequency(typical) : 0.5MHZ.
- ◆ responsivity : 31 V/(lux· sec)
- ◆ 2 phase clocking.
- ◆ 12V DC power, 5V pulse clocking.
- ◆ Peak wavelength spectral response : 570nm.

### CIRCUIT DIAGRAM

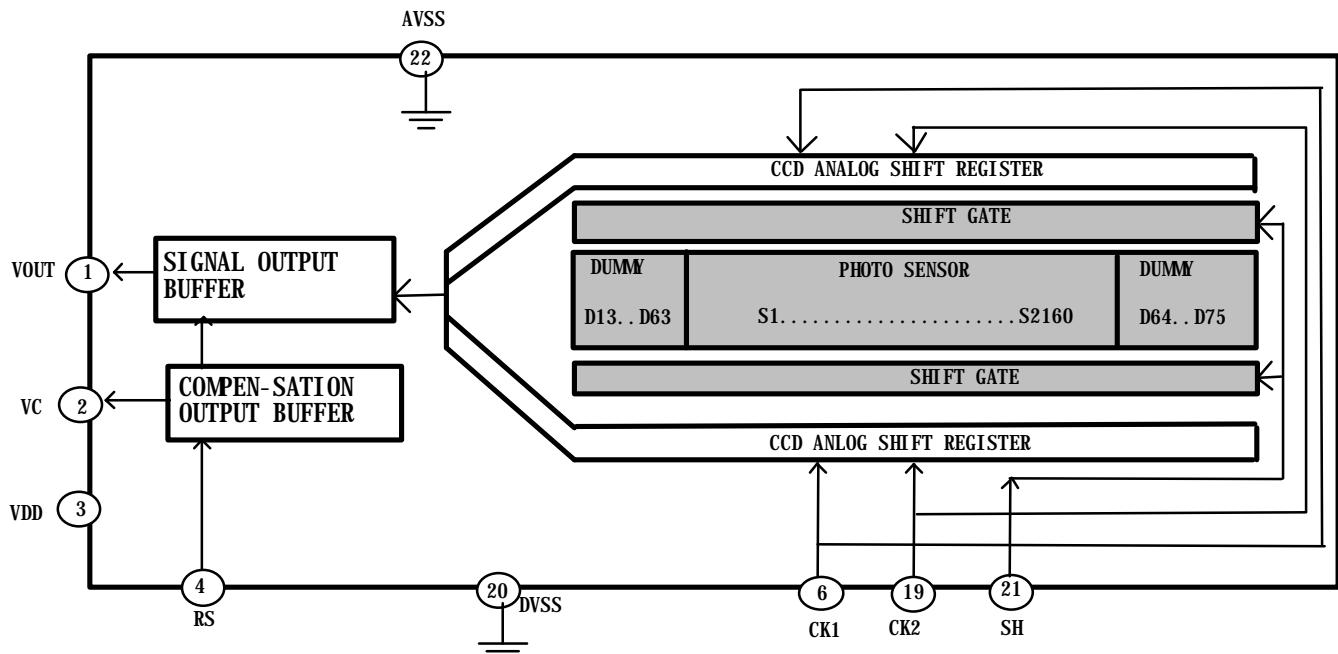




# HML1213

## L2160 ELEMENTS LINEAR IMAGE SENSOR

### PIN ASSIGNMENT

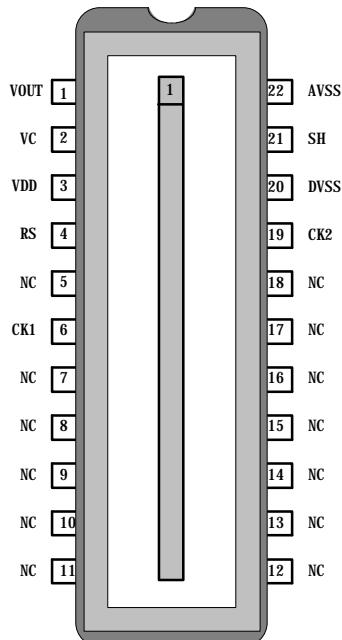

PIN DESCRIPTION	
Name	Description
VO	Signal output
VC	Compensation output
VDD	DC power supply
CK1	Clock phase 1
CK2	Clock phase 2
RS	Reset gate
SH	Shift gate
AVSS	Analog ground
DVSS	Digital ground
NC	Nonconnection

### ABSOLUTE MAXIMUM RATINGS

Parameter	Rating		
	Min	Max	Unit
Operating temperature	-25	+60	°C
Storage temperature	-40	+80	°C
Operating humidity	35%	80%	at 40°C
Storage humidity	20%	90%	at 40°C
Clock pulse voltage	-0.2	Vdd	V
Shift pulse voltage	-0.2	Vdd	V
Reset pulse voltage	-0.2	Vdd	V
Power supply voltage	-0.2	+13	V

**HML1213****L2160 ELEMENTS LINEAR IMAGE SENSOR****OPTICAL /ELECTRICAL CHARACTERISTICS**Temperature=25°C, Vdd=12V,CK1(CK2,RS,SH ) =5V pulse, f<sub>CK</sub>=0.25MHZ, f<sub>RS</sub>=0.5MHZ,Tint =10ms

,Load resistance=100KΩ,Light source = 3200°K halogen lamp+ CM500( infrared IR cutoff filter)

CHARACTERISTIC	SYMBOL	MIN	TYP	MAX	UNIT	NOTE
Responsivity	R	25	31	37	V/lx•sec	
Dynamic range	DR	---	1800	---		1
Saturation Voltage	Vsat	1.5	1.8	---	V	2
Saturation exposure	SE	---	0.036	---	lx•sec	2
Total transfer efficiency	TTE	92	96	---	%	
Output impedance	Z	---	450	---	Ω	
DC power dissipation	P	---	72	180	mW	
Photorespons non-uniformity	PRNU1	---	---	10	%	3
Photorespons non-uniformity	PRNU2	---	---	10	%	3
Register imbalance	RI	---	---	4	%	4
Dark signal voltage	DS	---	1	5	mV	5
Dark signal non-uniformity	DSNU	---	---	5	mV	6
Output DC level	Vo	4.5	---	6.6	V	7
Compensation DC level	Vc	4.5	---	6.6	V	7
DC mismatch voltage	MDC	---	---	500	mV	7

**NOTE:****1:Dynamic range (DR) :**

Dynamic range is defined as

$$DR = \frac{V_{SAT}}{DS}$$

i DS is proportional to Tint (integration time )

**2:Saturation voltage (Vsat) and Saturation exposure(SE) :**

Vsat is defined as the minimum saturation output voltage of all effective pixels.


And the exposure is defined as saturation exposure SE.



**HML1213**

**L2160 ELEMENTS LINEAR IMAGE SENSOR**

### **3:Photorespons nonuniformity (PRNU) :**

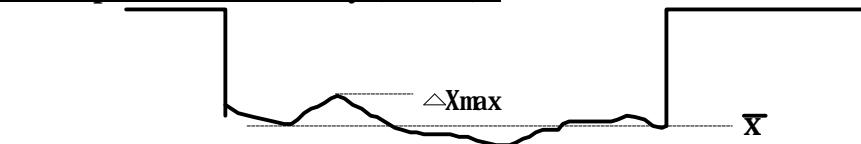

$$PRNU1 \text{ is defined as } PRNU1 = \frac{\Delta X_{\max}}{\bar{X}} \times 100\%$$

$\bar{X}$  is average of total output signal,

$\Delta X_{\max}$  is the maximum deviation from  $\bar{X}$

$$PRNU2 \text{ is defined as } PRNU2 = \frac{\Delta X_{next}}{\bar{X}} \times 100\%$$

$\Delta X_{next}$  is maximum difference of next pixel

### **4:Register Imbalance (RI) :**

RI is defined as follows

$$RI = \frac{\sum_{n=1}^{2159} |X_n - X_{n+1}|}{2159 \times \bar{X}} \times 100\%$$

Where  $X_n$  and  $X_{n+1}$  are output signal of each pixel .

$\bar{X}$  is average of total output signal.

### **5:Dark signal voltage (DS) :**

Dark signal is defined as average dark signal voltage of all effective pixels under room temperature 25°C, and integration time 10ms.

### **6:Dark signal nonuniformity (DSNU) :**

The DSNU is defined as the different dark voltage between the peak voltage and average voltage under room temperature 25°C and integration time 10ms.

peak dark signal






# HML1213

## L2160 ELEMENTS LINEAR IMAGE SENSOR

### 7:Output DC level (Vo) :

Output DC level and Compensation DC level are defined as

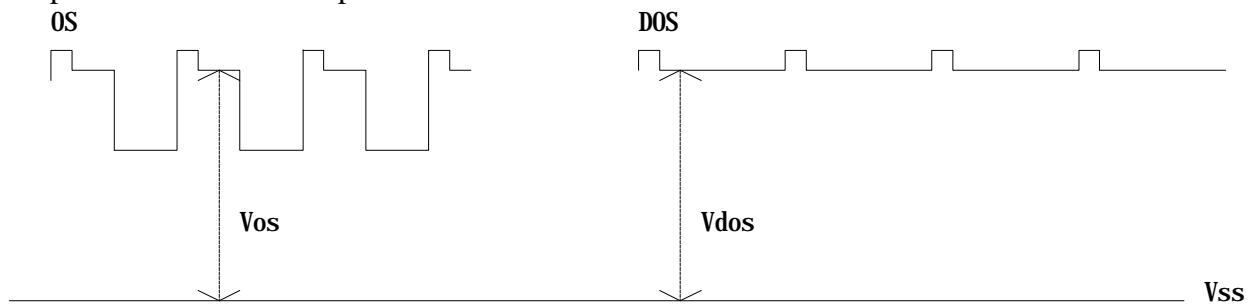

**HML1213****L2160 ELEMENTS LINEAR IMAGE SENSOR**



## OPERATING CONDITION

Characteristic		Symbol	Min	Typ	Max	Unit
Clock pulse voltage	H-level	CK1,CK2	4.5	5.0	Vdd	V
	L-level	CK1,CK2	-0.5	0	0.5	V
Shift pulse voltage	H-level	SH	4.5	5.0	Vdd	V
	L-level		-0.5	0	0.5	V
Reset pulse voltage	H-level	RS	4.5	5.0	Vdd	V
	L-level		-0.5	0	0.5	V
Power supply voltage		Vdd	11.5	12.0	13.0	V

## CLOCK CHARACTERISTICS

Temperature 25°C

Parameter	Symbol	Min	Typ	Max	
Clock pulse frequency	CK1,CK2	0.1	0.25	0.5	MHZ
Reset pulse frequency	RS	0.2	0.5	1	MHZ
Clock capacitance	Cck1,Cck2	---	400	650	pF
Shift gate capacitance	C <sub>SH</sub>	---	10	---	pF
Reset gate capacitance	C <sub>RS</sub>	---	10	15	pF

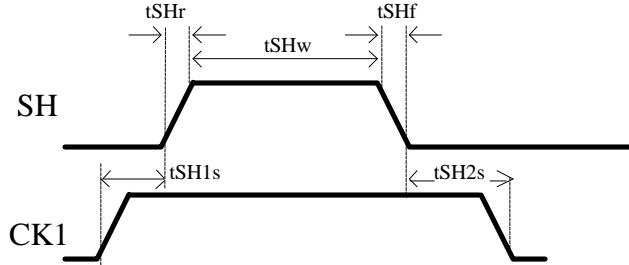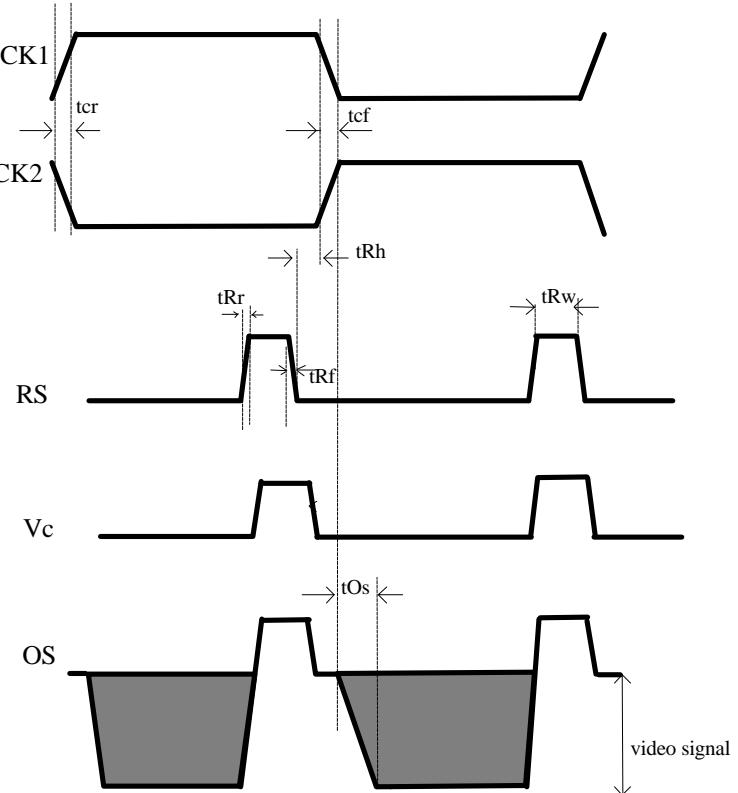
**Pulse Timing of SH and CK1**

**Pulse timing of CK1, CK2, RS and Vo**

**TIMING REQUIREMENT**

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Pulse timing of SH and CK	tSH1s, tSH2s	50	250	2000	ns
SH pulse rise time, fall time	TSHr,tSHf	0	50	---	ns
SH pulse width	tSHw	1	2	5	μs
CK1,CK2 pulse rise and fall time	Tcr,tcf	0	100	---	ns
RS pulse rise and fall time	TRr,tRf	0	20	---	ns
RS pulse width	tRw	250	400	---	ns
Pulse time of CK1,CK2,RS	tRh	50	250	---	ns
Video data delay time	tOs	---	150	450	ns

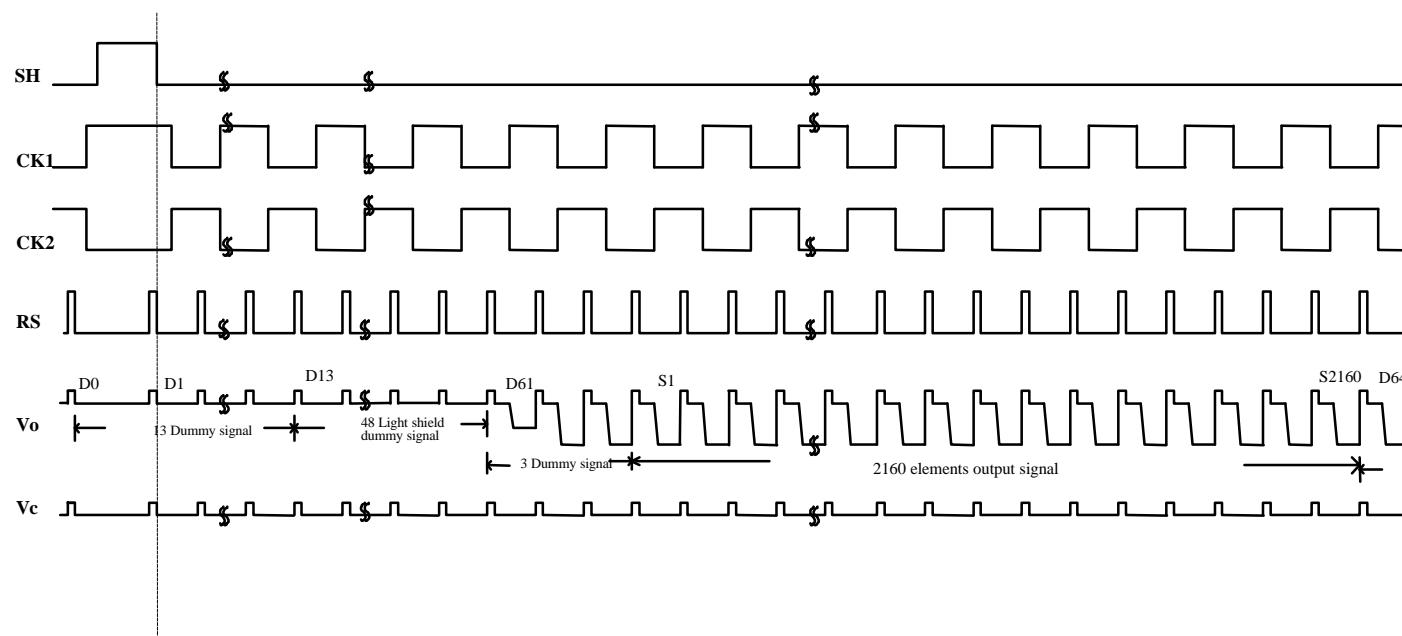


L2160 ELEMENTS LINE

#### TIMING CHART





**L2160 ELEMENTS LINEA**

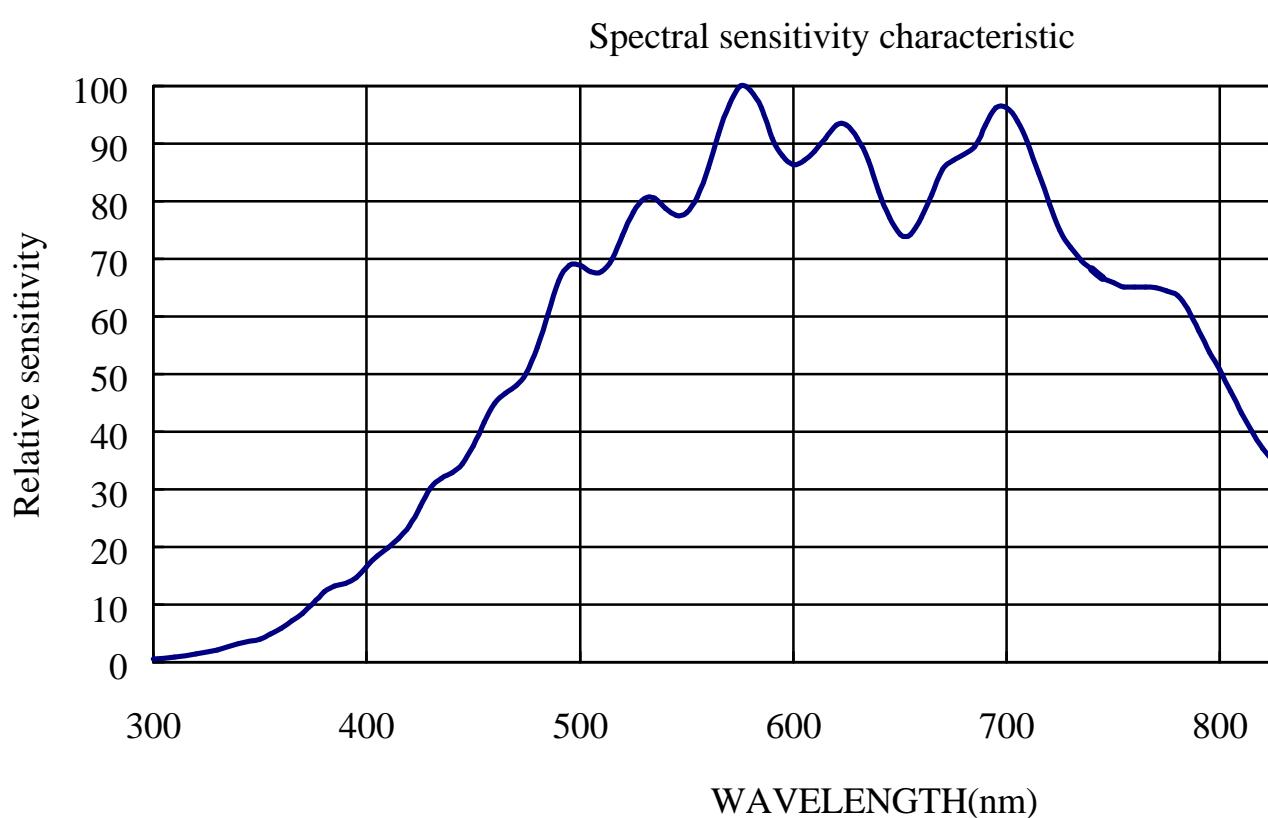


**HMC**

**HML1213**

*L2160 ELEMENTS LINEAR IMAGE SENSOR*


## APPLICATION CIRCUIT

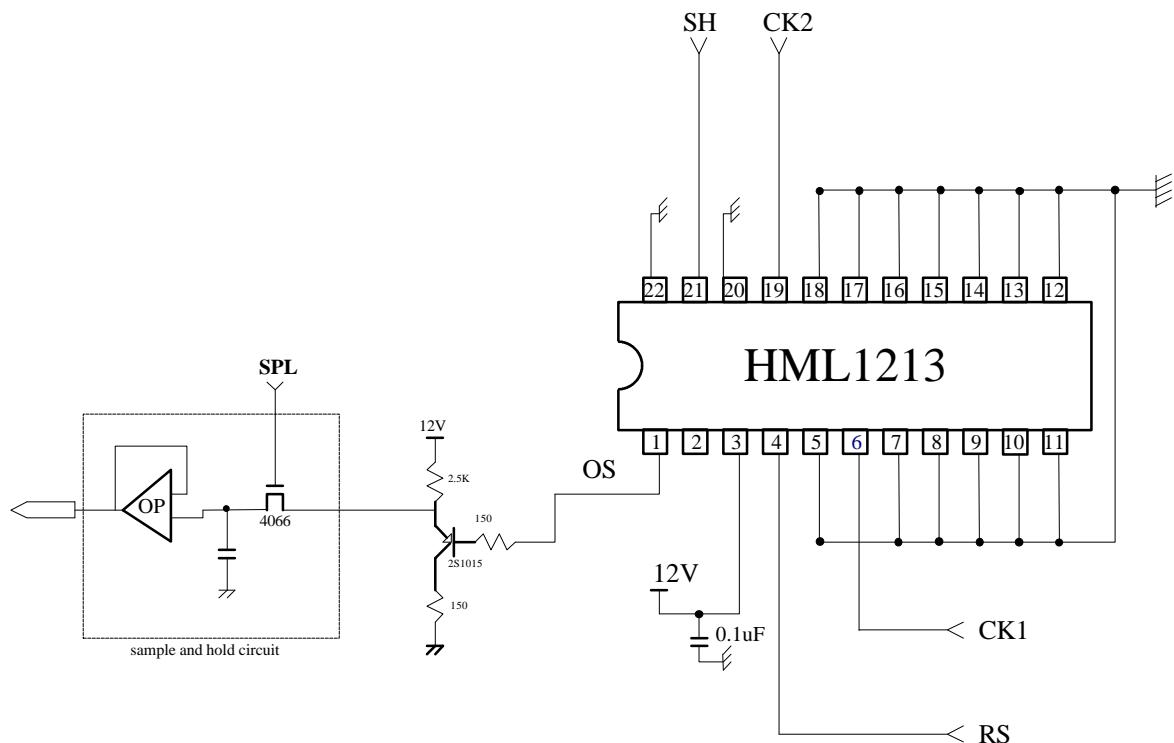



**L2160 ELEMENTS LINE**

#### PACKAGE OUTLINE

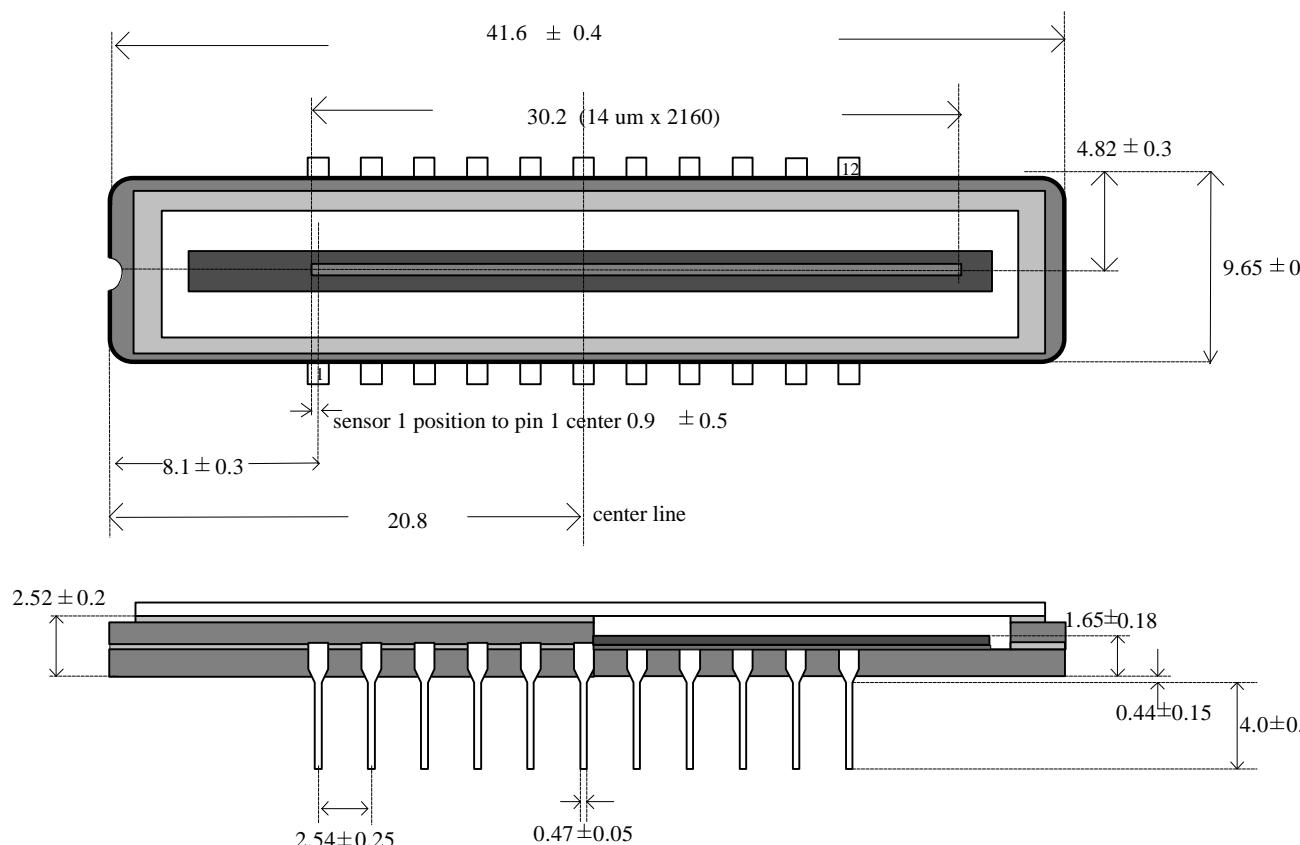

#### package structure

package material	ceramic
lead material	alloy with tin planting
glass refractive index	1.51