


# FC Type Fiber Optic Connectors

## HRFC Series

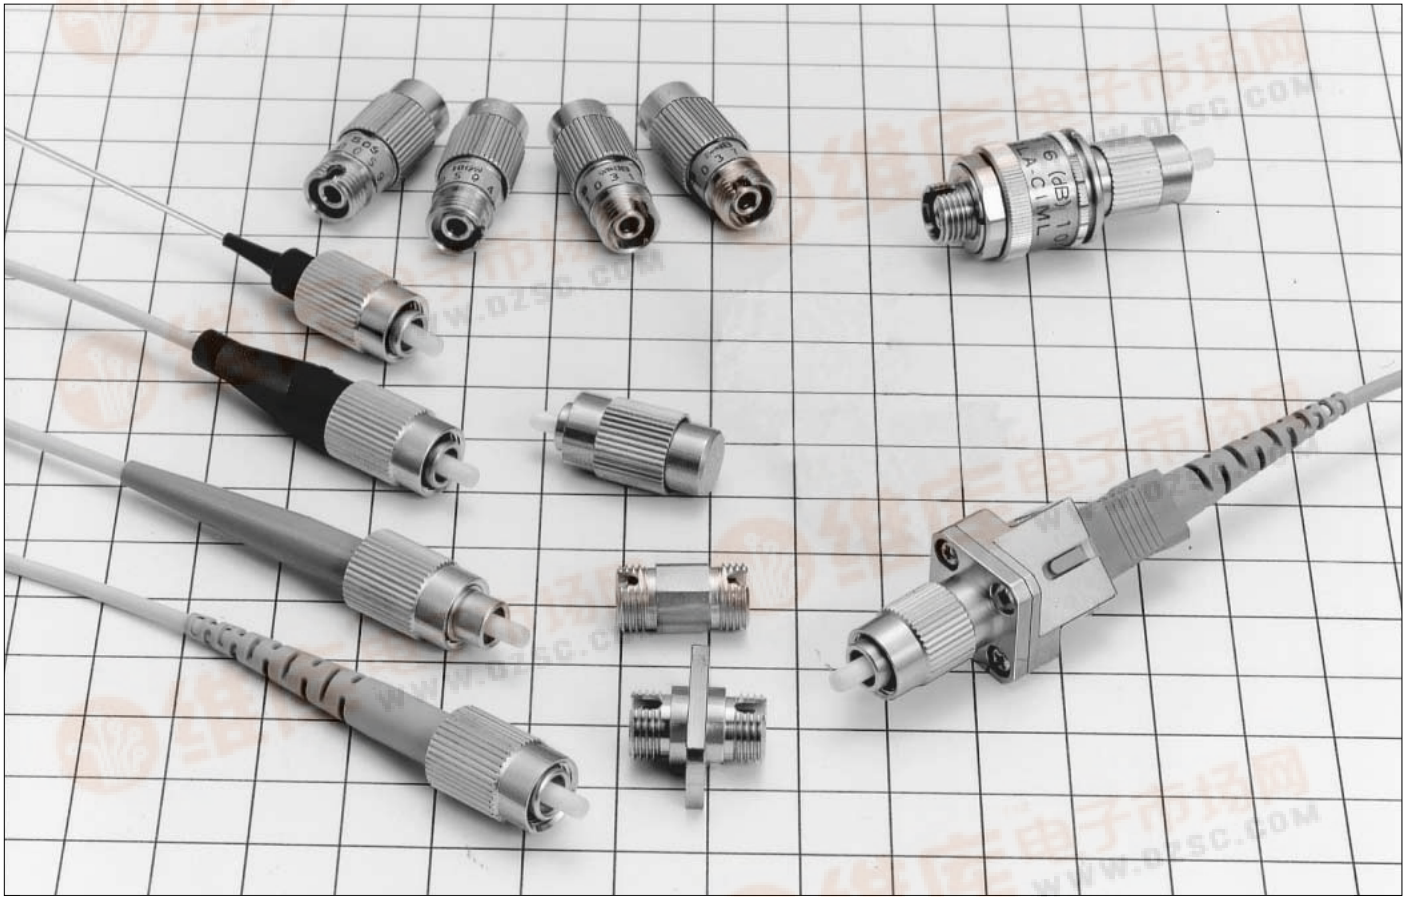

### ■ Features

#### 1. JIS, IEC standards compliant and fully intermateable with NTT's FC products.

JIC C 5970 (F01 type fiber optic connectors).  
IEC 61754-13

#### 2. Two types of plug frames

Conventional cutout key ring types and molded key ring types are available.

#### ■ Important Notice

Plug key width : 2.1mm  
Adapter key width : 2.2mm

### ■ Applications

Public communications lines, CATV, Test equipment, etc.

## Product Specifications

Ratings	Operating temperature range	-25°C to +70°C	Storage temperature range	-25°C to +70°C
---------	-----------------------------	----------------	---------------------------	----------------

Item		Test Method (IEC 61300)	Specifications
Optical Characteristics	Insertion Loss	(SM)	Wavelength 1310nm (LD)
		(GI)	Wavelength 1310nm (LED)
	Return Loss	(SM)	Wavelength 1310nm (LD)
		(GI)	Wavelength 1310nm (LD)
Mechanical Characteristics	Ferrule withdrawal	Extract Zirconia gauge 2.499 ±0.0005 mm dia from split sleeve.	Copper alloy split sleeve 2N to 5.9N Zirconia split sleeve 2N to 3.9N
	Cable retention (Straight pull)	98N tensile load for minute.	1) Insertion loss fluctuation after test: 0.2dB max. 2) No visible damage, dislocation of clamp or cable.
	Durability (cycles, mating/un-mating)	1000 times	1) Insertion loss fluctuation after test: 0.2dB max. 2) No visible damage, cracks or part dislocation.
	Vibration	Frequency: 10 to 55 Hz, single amplitude of 0.75 mm, 2 hours in each of the 3 axis.	
	Shock	Acceleration of 981 m/s <sup>2</sup> , 6 ms duration, sin half-wave waveform, 10 cycles in each of the 3 axis.	
Environmental Characteristics	Humidity (Temperature/ humidity- cycles)	-10°C to 65°C, humidity: 90% to 96% 20 cycles	1) Insertion loss fluctuation after test: 0.2dB max. 2) No visible damage, cracks or part dislocation.
	Change of temperature	-40°C to +70°C 42 cycles (Complies with Telcordia standard GR-326-CORE)	
	Dry heat	960 hours at 85°C	
	Cold	960 hours at -25°C	
	Salt mist	48 hours in a 5% concentration of salt mist	No significant corrosion.


## Materials

Part	Material
Plug housing	Brass, Stainless steel or Zinc alloy
Spring	Stainless steel
Ferrule	Zirconia
Adapter	Brass
Split sleeve	Copper alloy
Receptacle	Brass
Attenuator housing	Stainless steel




## ■Molded keying ring type (Key width 2.1mm)

### ●For 2mm cable

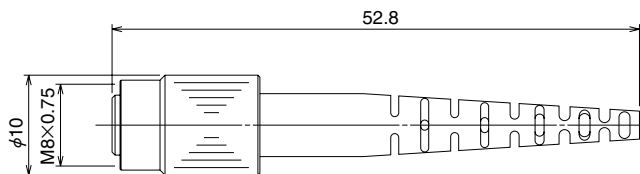


Part Number	CL No.	Boot color	Polishing type
HRFC-P8-H2(21)	701-0075-3-21	Blue	PC
HRFC-P8-L2(21)	701-0077-9-21	Light purple	AdPC
HRFC-P8-G2(21)	701-2001-8-21	Green	APC

### ●For 3mm cable

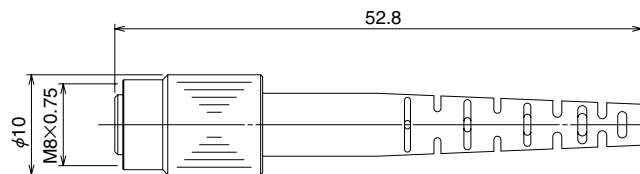

Part Number	CL No.	Boot color	Polishing type
HRFC-P8-H3(21)	701-0074-0-21	Blue	PC
HRFC-P8-L3(21)	701-0078-1-21	Light purple	AdPC
HRFC-P8-G3(21)	701-2002-0-21	Green	APC

### ●For 0.9mm fiber

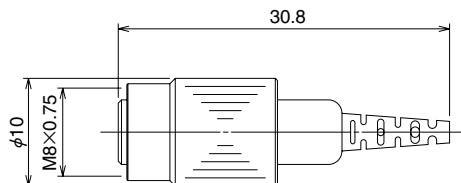

Part Number	CL No.	Boot color	Polishing type
HRFC-P15-H(21)	701-0114-3-21	Blue	PC
HRFC-P15-L(21)	701-0115-6-21	Light purple	AdPC
HRFC-P15-G(21)	701-2004-6-21	Green	APC


## ■Tool

### ●Crimp tool



Part Number	CL No.	Applicable connector
HSC-T3	704-0287-0	HRFC-P8-H2,L2,G2, HRFC-P8-H3,L3,G3,


### <Locations>



- (1)2mm Jacket crimping: section A  
3mm Jacket crimping: section C  
(2)Kevlar™ crimping: section B


## ■Cutout keying ring type (Key width 2.1mm)

### ●For 2mm cable

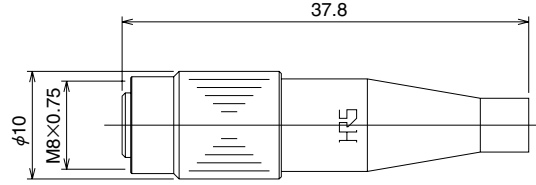


Part Number	CL No.
HRFC-P1-H(04)	701-0001-7-04

### ●For 3mm cable

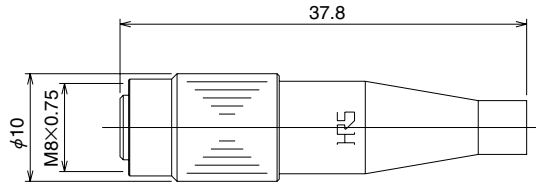

Part Number	CLNo.
HRFC-P1-H	701-0001-7


### ●For 0.9mm fiber

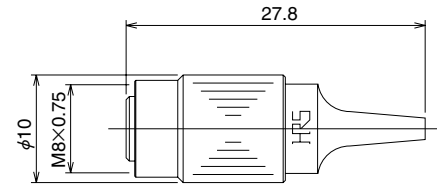


Part Number	CL No.
HRFC-P6-H	701-0041-1

## Adapters (Key width 2.2mm)

### Solid Body type

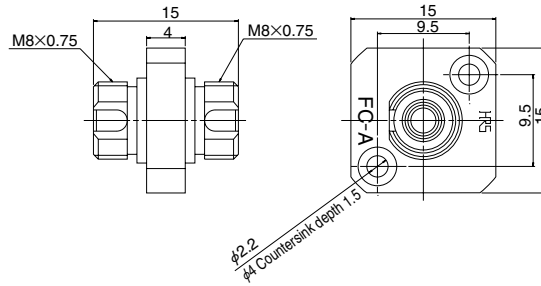

### Panel Cutout




Board thickness : 16mm


Part Number	CL No.	Split sleeve	Remarks
HRFC-PA11-G1	701-0071-2	Copper alloy	
HRFC-PA11-D1	701-0106-5	Zirconia	(Note)

Note: Please take utmost care when inserting FC plug into a FC adapter. When applying excessive force to the FC plug or inserting in an odd angle, the zirconia sleeve within the adapter might be damaged.

### Standard Body type

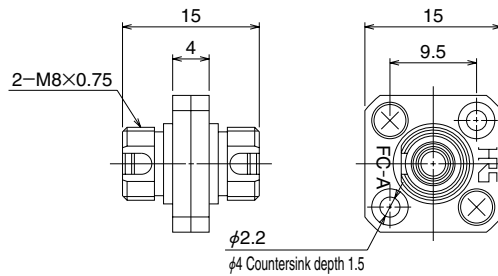

### Panel Cutout




Board thickness : 16mm


Part Number	CL No	Mark	Split sleeve	Remarks
HRFC-PA1-G1(02)	701-0014-9-02	FC-AP	Copper alloy	
HRFC-PA1-D1	701-0089-8	FC-A	Zirconia	(Note)

Note: Please take utmost care when inserting FC plug into a FC adapter. When applying excessive force to the FC plug or inserting in an odd angle, the zirconia sleeve within the adapter might be damaged.

### Flange type

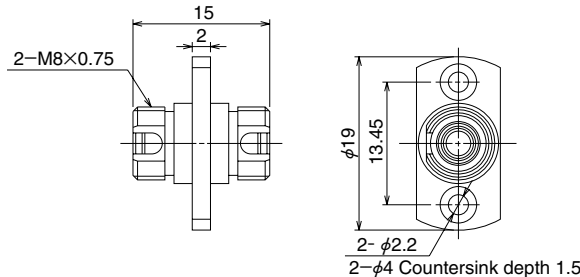


### Panel Cutout



Part Number	CL No.	Split sleeve	Remarks
HRFC-PA4-G1	701-0068-8	Copper alloy	
HRFC-PA4-D1	701-0112-8	Zirconia	(Note)

Note: Please take utmost care when inserting FC plug into a FC adapter. When applying excessive force to the FC plug or inserting in an odd angle, the zirconia sleeve within the adapter might be damaged.

### Round type

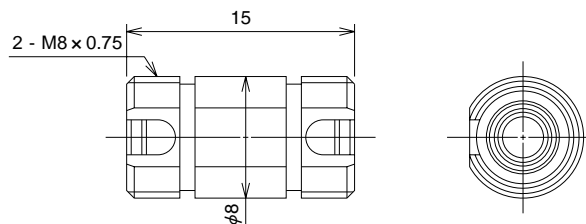


Part Number	CL No.	Split sleeve	Remarks
HRFC-A2-SF(01)	701-0039-0-01	Copper alloy	
HRFC-A2-SF-D1	—	Zirconia	(Note)


Note: Please take utmost care when inserting FC plug into a FC adapter. When applying excessive force to the FC plug or inserting in an odd angle, the zirconia sleeve within the adapter might be damaged.

## Conversion adapters

### FC / SC

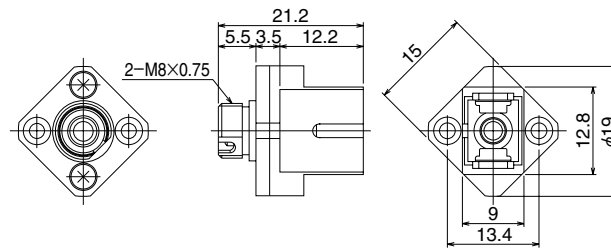



### Panel Cutout



Board thickness : 16mm


Part Number	CL No.	Split sleeve
HSCJ-HRFCJ-B(51)	704-0021-3-51	Copper alloy

### FC / SC

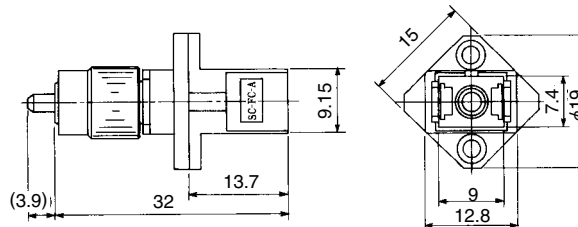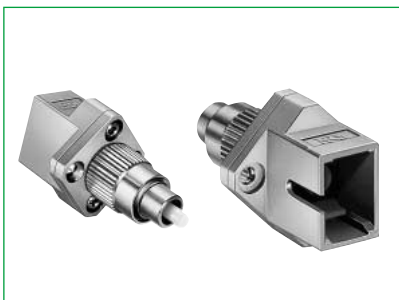


Part Number	CL No.	Split sleeve	Polishing type	Fiber type
HRFCP-HSCJ-1(51)	701-0065-0-51	Copper alloy	PC	GI-50/125
HRFCP-HSCJ-1AS(51)	701-0108-0-51		AdPC	
HRFCP-HSCJ-2(51)	701-0085-7-51		PC	SM-9.5/125
HRFCP-HSCJ-2AS(51)	701-0109-3-51		AdPC	

### FC / SC

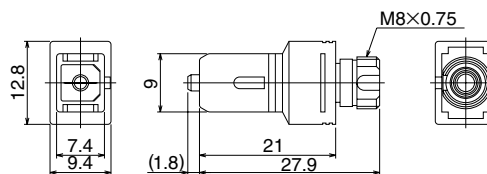


Part Number	CL No.	Split sleeve	Polishing type	Fiber type
HSCP-HRFCJ-1(51)	704-0203-0-51	Copper alloy	PC	GI-50/125
HSCP-HRFCJ-1AS(51)	704-0288-3-51		AdPC	
HSCP-HRFCJ-2(51)	704-0204-3-51		PC	SM-9.5/125
HSCP-HRFCJ-2AS(51)	704-0289-6-51		AdPC	

## Receptacle

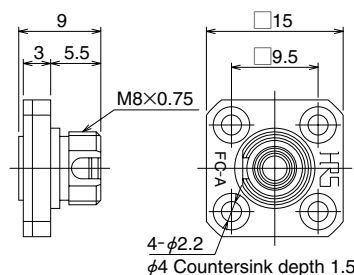

### Panel Cutout




Part Number	HRS No.	Remarks
HRFC-R1	701-0016-4	MM
HRFC-R2	701-0023-0	SM

## Ferrule

Same as SC ferrules  
Refer to page 33 for details.

## Dust Cap

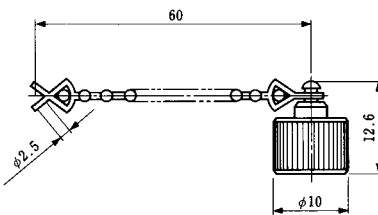

Part Number	CL No.
HRFC-C1	701-0019-2