
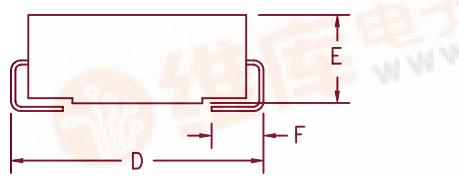


[查询HSM150J供应商](#)

1 Amp Schottky Rectifier HSM150J, HSM160J

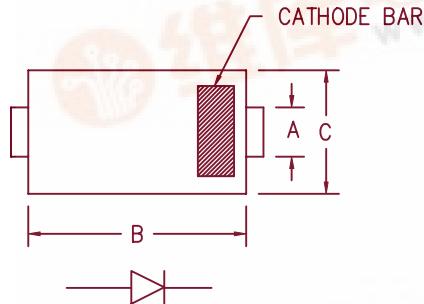

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.073	.087	1.85	2.21	
B	.160	.180	4.06	4.57	
C	.130	.155	3.30	3.94	
D	.205	.220	5.21	5.59	
E	.075	.130	1.91	3.30	
F	.030	.060	.76	1.52	

DO-214BA Package

Microsemi
Catalog Number

Working
Peak Reverse
Voltage

Repetitive
Peak Reverse
Voltage

Device
Marking

HSM150J
HSM160J

50V
60V

H150
H160

- Schottky Barrier Rectifier
- Guard Ring Protection
- 150°C Junction Temperature
- V_{RRM} 50 to 60 Volts
- Surface mount package

Electrical Characteristics

Average forward current
Maximum surge current
Max peak forward voltage
Max peak forward voltage
Max peak reverse current
Typical junction capacitance

$I_F(AV)$ 1.0 Amps
 I_FSM 50 Amps
 V_{FM} .51 Volts
 V_{FM} .69 Volts
 I_{RM} 100 μ A
 C_J 53pF

Square wave
8.3ms, half sine, $T_J = 150^\circ\text{C}$
 $I_{FM} = 0.1\text{A}; T_J = 25^\circ\text{C}$ *
 $I_{FM} = 1.0\text{A}; T_J = 25^\circ\text{C}$ *
 $V_{RRM}, T_J = 25^\circ\text{C}$
 $V_R = 5.0\text{V}, T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μ sec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temperature range
Operating junction temp range
Maximum thermal resistance
Weight

T_{STG}
 T_J
 $R_{\theta JL}$

-55°C to 175°C
-55°C to 175°C
15°C/W Junction to lead
.0047 ounces (.013 grams) typical

HSM150J, HSM160J

Figure 1
Typical Forward Characteristics

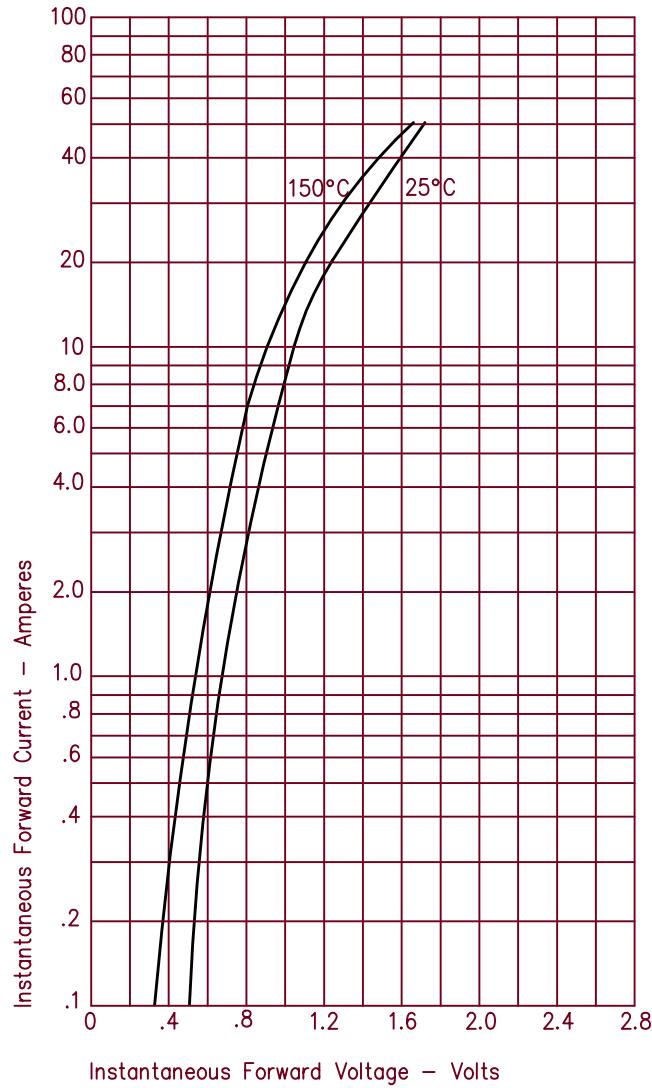


Figure 3
Typical Junction Capacitance

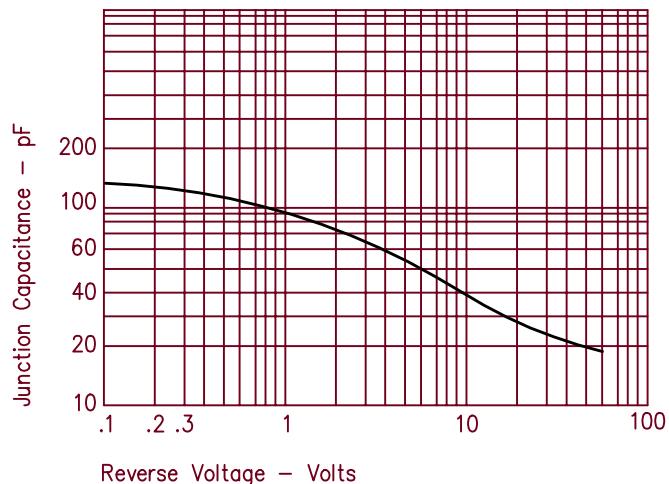


Figure 2
Typical Forward Characteristics

