



New Product

Si91842/4
Vishay Siliconix

150-mA Low-Noise LDO Regulator With Error Flag and Discharge Option

FEATURES

- Ultra Low Dropout—130 mV at 150-mA Load
- Low Noise—75 $\mu\text{V}_{(\text{rms})}$ (10-Hz to 100-kHz Bandwidth)
- Out-of-Regulation Error Flag (power good)
- Shutdown Control
- 110- μA Ground Current at 150-mA Load
- Fast Start-Up (50 μs)
- 1.5% Guaranteed Output Voltage Accuracy (1.2 V, 2%)
- 300-mA Peak Output Current Capability
- Uses Low ESR Ceramic Capacitors
- Fast Line and Load Transient Response ($\leq 30 \mu\text{s}$)
- 1- μA Maximum Shutdown Current
- Output Current Limit
- Reverse Battery Protection
- Built-in Short Circuit and Thermal Protection

- Si91842: Output—Auto-Discharge In Shutdown Mode
- Si91844: Output—No-Discharge In Shutdown Mode
- Fixed 1.2, 1.8, 2.0, 2.2, 2.5, 2.6, 2.7, 2.8, 2.85, 2.9, 3.0, 3.3, 3.5, 3.6, 5.0-V Output Voltage Options
- SOT23-5 Package

APPLICATIONS

- Cellular Phones, Wireless Handsets
- Noise-Sensitive Electronic Systems, Laptop and Palmtop Computers
- PDAs
- Pagers
- Digital Cameras
- MP3 Player
- Wireless Modem

DESCRIPTION

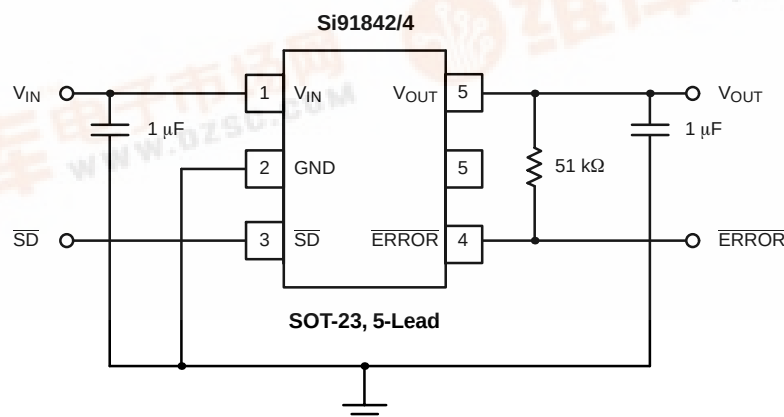
The Si91842/4 is a 150-mA CMOS LDO (low dropout) voltage regulator. It is the perfect choice for low voltage, low power applications. An ultra low ground current and ultra fast turn-on make this part attractive for battery operated power systems. The Si91842/4 also offers ultra low dropout voltage to prolong battery life in portable electronics. Systems requiring a quiet voltage source will benefit from the Si91842/4's low output noise. The Si91842/4 is designed to maintain regulation while delivering 300-mA peak current, making it ideal for systems that have a high surge current upon turn-on.

For better transient response and regulation, an active

pull-down circuit is built into the Si91842/4 to clamp the output voltage when it rises beyond normal regulation. The Si91842 automatically discharges the output voltage by connecting the output to ground through a 100- Ω n-channel MOSFET when the device is put in shutdown mode.

The Si91842/4 features reverse battery protection to limit reverse current flow to approximately 1- μA in the event reversed battery is applied at the input, thus preventing damage to the IC.

TYPICAL APPLICATION CIRCUIT



Si91842/4

Vishay Siliconix

New Product



ABSOLUTE MAXIMUM RATINGS

Absolute Maximum Ratings

Input Voltage, V_{IN} to GND -6.0 to 6.5 V
 $\overline{V_{ERROR}}$, $\overline{V_{SD}}$ (See Detailed Description) -0.3 V to V_{IN}
 Output Current, I_{OUT} Short Circuit Protected
 Output Voltage, V_{OUT} -0.3 V to $V_{IN} + 0.3$ V
 Package Power Dissipation, $(P_d)^b$ 440 mW

Package Thermal Resistance, $(\theta_{JA})^a$ 180°C/WMaximum Junction Temperature, $T_{J(max)}$ 150°CStorage Temperature, T_{STG} -65°C to 150°C

Notes

a. Device mounted with all leads soldered or welded to PC board.

b. Derate 5.5 mW/°C above $T_A = 70^\circ\text{C}$

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

RECOMMENDED OPERATING RANGE

Input Voltage, V_{IN} 2 V to 6 VOperating Ambient Temperature, T_A -40°C to 85°CInput Voltage, V_{SD} 0 V to V_{IN} $C_{IN} = C_{OUT} = 1 \mu\text{F}$ (ceramic)Maximum ESR of C_{OUT} : 0.4 Ω

SPECIFICATIONS								
Parameter	Symbol	Test Conditions Unless Specified T _A = 25°C, V _{IN} = V _{OUT(nom)} + 1 V, I _{OUT} = 1 mA, C _{IN} = 1 μF, C _{OUT} = 1.0 μF, V _{SD} = 1.5 V		Temp ^a	Limits −40 to 85°C			Unit
					Min ^b	Typ ^c	Max ^b	
Input Voltage Range	V _{IN}			Full	2		6	V
Output Voltage Accuracy		1 mA ≤ I _{OUT} ≤ 150 mA	V _{OUT} ≥ 1.8 V	Room	−1.5	1	1.5	%
				Full	−2.5	1	2.5	
			V _{OUT} = 1.2 V	Room	−2.0	1	2.0	
				Full	−3.0	1	3.0	
Line Regulation (V _{OUT} ≤ 3 V)	$\frac{\Delta V_{OUT} \times 100}{\Delta V_{IN} \times V_{OUT(nom)}}$	From V _{IN} = V _{OUT(nom)} + 1 V to V _{OUT(nom)} + 2 V		Full	−0.06		0.18	%V
Line Regulation (3.0 V < V _{OUT} ≤ 3.6 V)				Full	0		0.3	
Line Regulation (5-V Version)				From V _{IN} = 5.5 V to 6 V		Full	0	
Dropout Voltage ^{d, g} (V _{OUT(nom)} ≥ 2.6 V)	V _{IN} − V _{OUT}	I _{OUT} = 1 mA		Room		1		mV
		I _{OUT} = 50 mA		Room		45	80	
				Full		50	90	
		I _{OUT} = 150 mA		Room		130	180	
Full						220		
Dropout Voltage ^{d, g} (V _{OUT(nom)} < 2.6 V, V _{IN} ≥ 2 V)		I _{OUT} = 50 mA		Room		65	100	
				Full			120	
		I _{OUT} = 150 mA		Room		190	250	
	Full					300		
Ground Pin Current ^{e, g} (V _{OUT(nom)} ≤ 3 V)	I _{GND}	I _{OUT} = 0 mA		Room		100	150	μA
				Full			180	
		I _{OUT} = 150 mA		Room		110	200	
				Full			230	
		I _{OUT} = 0 mA		Room		110	170	
				Full			200	
Ground Pin Current ^{e, g} (V _{OUT(nom)} > 3 V)		I _{OUT} = 150 mA		Room		120	200	
				Full			230	
Peak Output current	I _{O(peak)}	V _{OUT} ≥ 0.95 x V _{OUT(nom)} · t _{PW} = 2 ms		Full	300			mA
Output Noise Voltage	e _N	V _{OUT} = 2.6 V, BW = 10 Hz to 100 kHz, 0 mA < I _{OUT} < 150 mA		Room		75		μV(rms)



New Product

Si91842/4
Vishay Siliconix

SPECIFICATIONS

Parameter	Symbol	Test Conditions Unless Specified $T_A = 25^\circ\text{C}$, $V_{IN} = V_{OUT(nom)} + 1\text{ V}$, $I_{OUT} = 1\text{ mA}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 1.0\text{ }\mu\text{F}$, $V_{SD} = 1.5\text{ V}$	Temp ^a	Limits −40 to 85°C			Unit
				Min ^b	Typ ^c	Max ^b	
Ripple Rejection	$\Delta V_{OUT}/\Delta V_{IN}$	$I_{OUT} = 150\text{ mA}$	$f = 1\text{ kHz}$	Room		60	dB
			$f = 10\text{ kHz}$	Room		40	
			$f = 100\text{ kHz}$	Room		30	
Dynamic Line Regulation	$\Delta V_{O(line)}$	$V_{IN} : V_{OUT(nom)} + 1\text{ V to } V_{OUT(nom)} + 2\text{ V}$ $t_r/t_f = 2\text{ }\mu\text{s}$, $I_{OUT} = 150\text{ mA}$	Room		20		mV
Dynamic Load Regulation	$\Delta V_{O(load)}$	$I_{OUT} : 1\text{ mA to } 150\text{ mA}$, $t_r/t_f = 2\text{ }\mu\text{s}$	Room		25		
Thermal Shutdown Junction Temperature	$T_{J(S/D)}$		Room		150		°C
Thermal Hysteresis	T_{HYST}		Room		20		
Reverse current	I_R	$V_{IN} = -6.0\text{ V}$	Room		1		μA
Short Circuit Current	I_{SC}	$V_{OUT} = 0\text{ V}$	Room		700		mA
Shutdown							
Shutdown Supply Current	$I_{CC(off)}$	$V_{SD} = 0\text{ V}$	Room		0.1	1	μA
$\overline{\text{SD}}$ Pin Input Voltage	V_{SD}	High = Regulator ON (Rising)	Full	1.5		V_{IN}	V
		Low = Regulator OFF (Falling)	Full			0.4	
Auto Discharge Resistance	R_{DIS}	Si91842 Only	Room		100		Ω
$\overline{\text{SD}}$ Pin Input Current ^f	$I_{IN(SD)}$	$V_{SD} = 1.5\text{ V}$, $V_{IN} = 6\text{ V}$	Room		0.7		μA
$\overline{\text{SD}}$ Hysteresis	$V_{HYST(SD)}$		Full		150		mV
V_{OUT} Turn-On Time	t_{ON}	V_{SD} (See Figure 1), $I_{LOAD} = 100\text{ mA}$	Room		50		μs
ERROR Output							
$\overline{\text{ERROR}}$ High Leakage	I_{OFF}	$\overline{\text{ERROR}} \leq V_{IN}$, V_{OUT} in Regulation	Full			1	μA
$\overline{\text{ERROR}}$ Low Voltage	V_{OL}	$I_{SINK} = 0.5\text{ mA}$	Full			0.4	V
$\overline{\text{ERROR}}$ Voltage Threshold	$V_{\overline{\text{ERROR}}}$	V_{OUT} Below $V_{OUT(nom)}^g$, $V_{IN} \geq 2\text{ V}$ V_{OUT} Falling, $I_{OUT} = 1\text{ mA}$, $V_{OUT(nom)} \geq 2\text{ V}$	Full	−2	−4	−6	%
		$V_{OUT(nom)}^g < 2\text{ V}$, $V_{IN} > 2\text{ V}$	Full		−4		
$\overline{\text{ERROR}}$ Voltage Threshold Hysteresis	$V_{HYST(\overline{\text{ERROR}})}$		Room		1.5		

Notes

- Room = 25°C, Full = −40 to 85°C.
- The algebraic convention whereby the most negative value is a minimum and the most positive a maximum.
- Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- Dropout voltage is defined as the input to output differential voltage at which the output voltage drops 2% below the output voltage measured with a 1-V differential, provided that V_{IN} does not drop below 2.0 V.
- Ground current is specified for normal operation as well as “drop-out” operation.
- The device's shutdown pin includes a typical 2-M Ω internal pull-down resistor connected to ground.
- $V_{OUT(nom)}$ is V_{OUT} when measured with a 1-V differential to V_{IN} .

TIMING WAVEFORMS

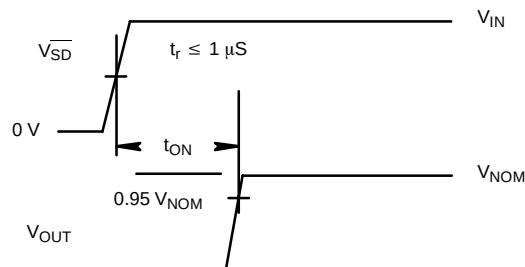


FIGURE 1. Timing Diagram for Power-Up

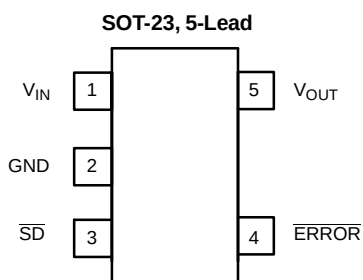
Si91842/4

Vishay Siliconix

New Product



PIN CONFIGURATION



PIN DESCRIPTION

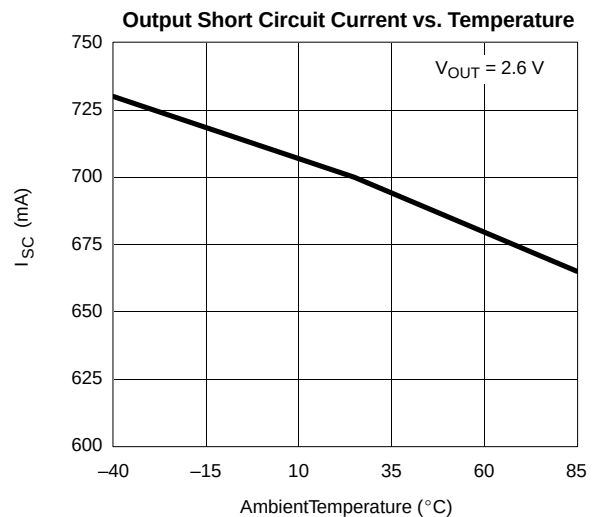
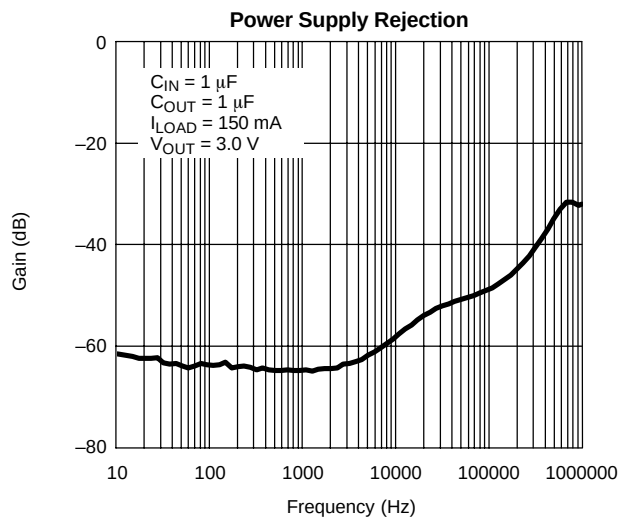
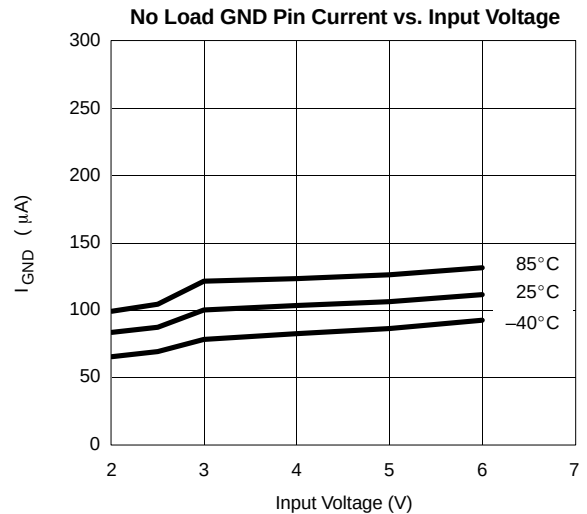
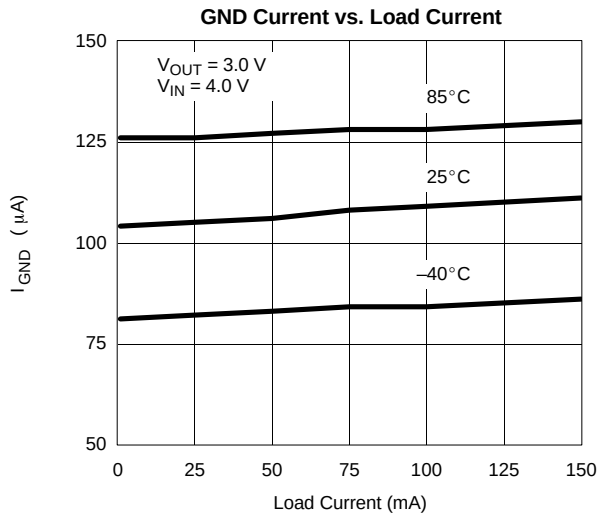
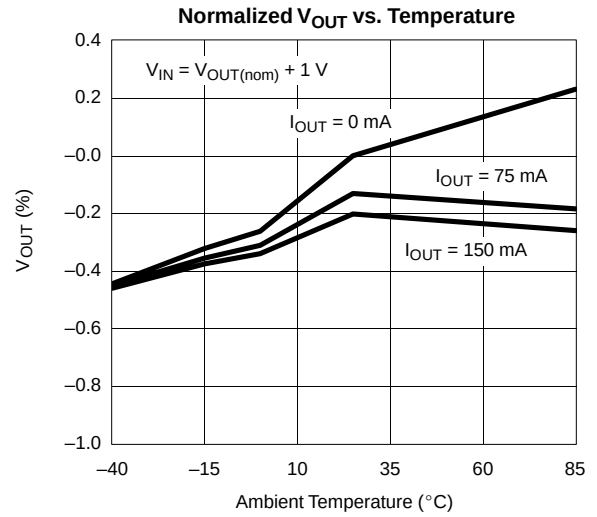
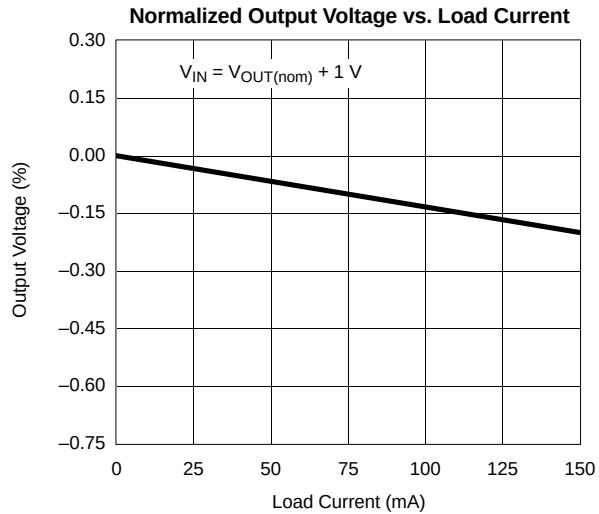
Pin Number	Name	Function
1	V_{IN}	Input supply pin. Bypass this pin with a 1- μ F ceramic or tantalum capacitor to ground
2	GND	Ground pin. For better thermal capability, directly connected to large ground plane
3	$\overline{SD}$	By applying less than 0.4 V to this pin, the device will be turned off. Connect this pin to V_{IN} if unused
4	$\overline{ERROR}$	The open drain output is an error flag output which goes low when V_{OUT} drops 4% below its nominal voltage.
5	V_{OUT}	Output voltage. Connect C_{OUT} between this pin and ground.

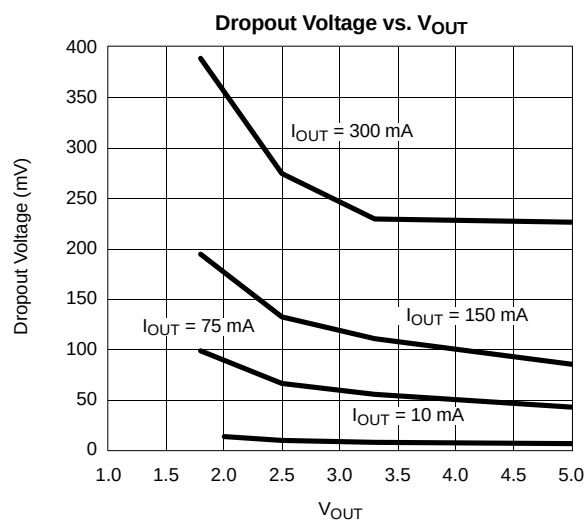
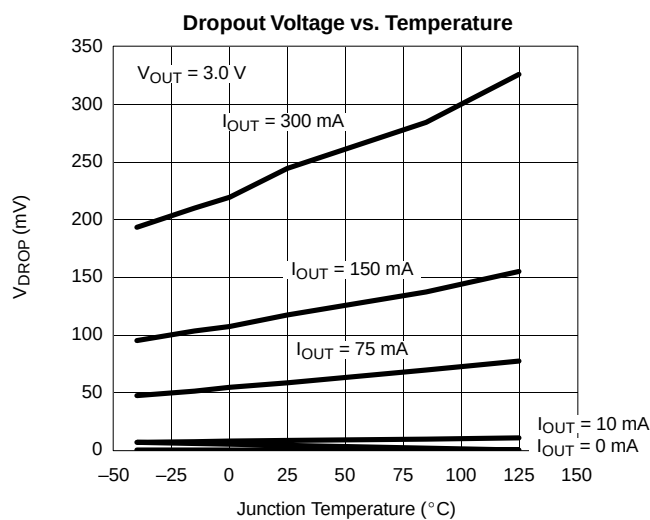
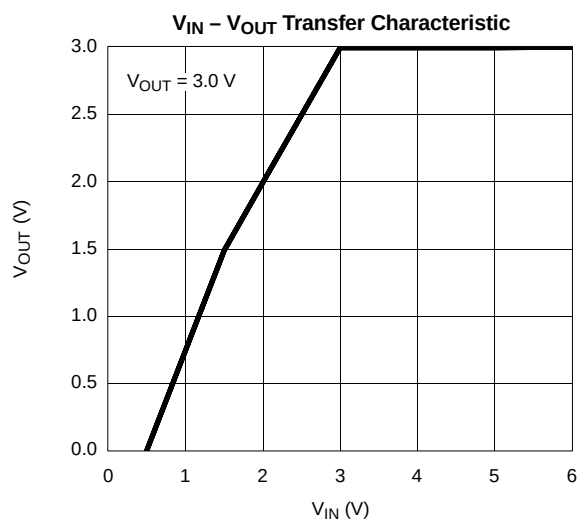
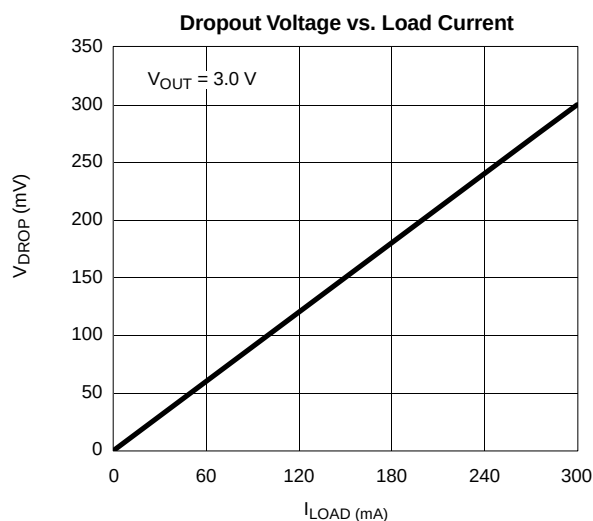
ORDERING INFORMATION

Si91842					Si91844				
Part Number	Marking	Voltage	Temp. Range	Pkg.	Part Number	Marking	Voltage	Temp. Range	Pkg.
Si91842DT-12-T1 ^b	J8LLL	1.2	-40 to 85°C	SOT23-5	Si91844DT-18-T1	F6LLL	1.8	-40 to 85°C	SOT23-5
Si91842DT-18-T1	C8LLL	1.8			Si91844DT-20-T1	F7LLL	2.0		
Si91842DT-20-T1	C9LLL	2.0			Si91844DT-22-T1	F8LLL	2.2		
Si91842DT-22-T1	C0LLL	2.2			Si91844DT-25-T1	F9LLL	2.5		
Si91842DT-25-T1	D1LLL	2.5			Si91844DT-26-T1	F0LLL	2.6		
Si91842DT-26-T1	D2LLL	2.6			Si91844DT-27-T1	G1LLL	2.7		
Si91842DT-27-T1	D3LLL	2.7			Si91844DT-28-T1	G2LLL	2.8		
Si91842DT-28-T1	D4LLL	2.8			Si91844DT-285-T1	G3LLL	2.85		
Si91842DT-285-T1	D5LLL	2.85			Si91844DT-29-T1	G4LLL	2.9		
Si91842DT-29-T1	D6LLL	2.9			Si91844DT-30-T1	G5LLL	3.0		
Si91842DT-30-T1	D7LLL	3.0			Si91844DT-33-T1	G6LLL	3.3		
Si91842DT-33-T1	D8LLL	3.3			Si91844DT-35-T1	G7LLL	3.5		
Si91842DT-35-T1	D9LLL	3.5			Si91844DT-36-T1	G8LLL	3.6		
Si91842DT-36-T1	D0LLL	3.6			Si91844DT-50-T1	G9LLL	5.0		
Si91842DT-50-T1	E1LLL	5.0							

Notes:

- LLL = Lot Code
- Advanced Information, available March 2002.

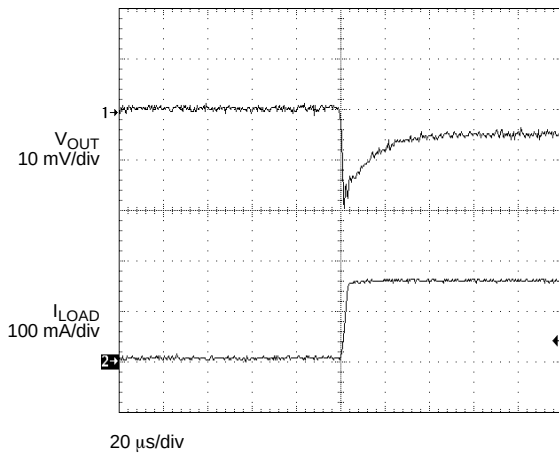
**TYPICAL CHARACTERISTICS (INTERNALLY REGULATED, 25°C UNLESS NOTED)**

TYPICAL CHARACTERISTICS (INTERNALLY REGULATED, 25°C UNLESS NOTED)




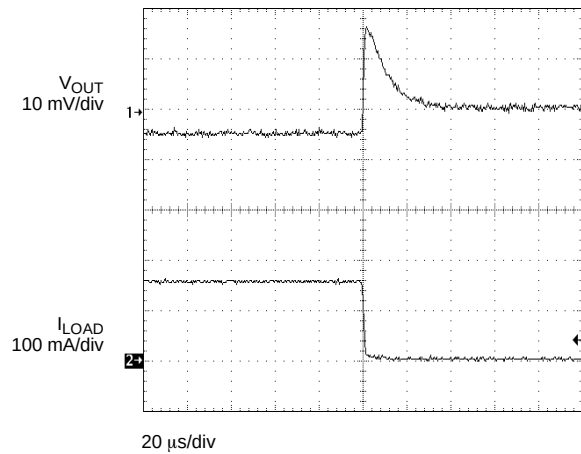
TYPICAL WAVEFORMS

Load Transient Response-1



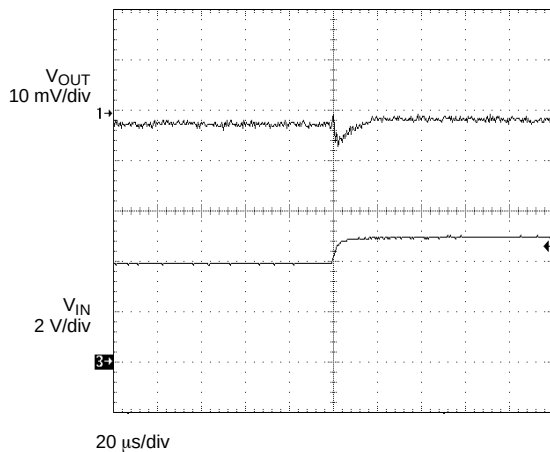
$V_{OUT} = 3.0$ V
 $C_{OUT} = 1$ μ F
 $I_{LOAD} = 1$ to 150 mA
 $t_{rise} = 2$ μ sec

Load Transient Response-2



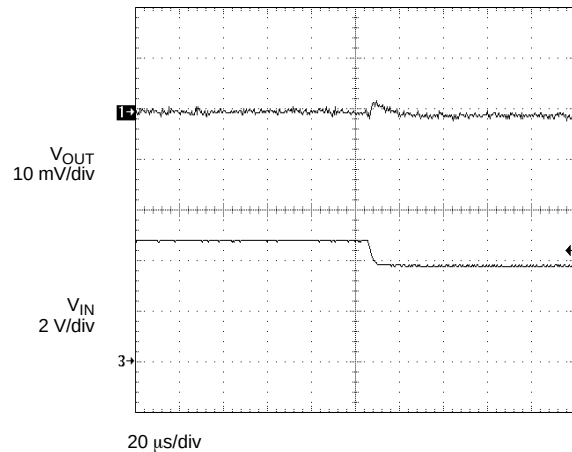
$V_{OUT} = 3.0$ V
 $C_{OUT} = 1$ μ F
 $I_{LOAD} = 150$ to 1 mA
 $t_{fall} = 2$ μ sec

Line Transient Response-1

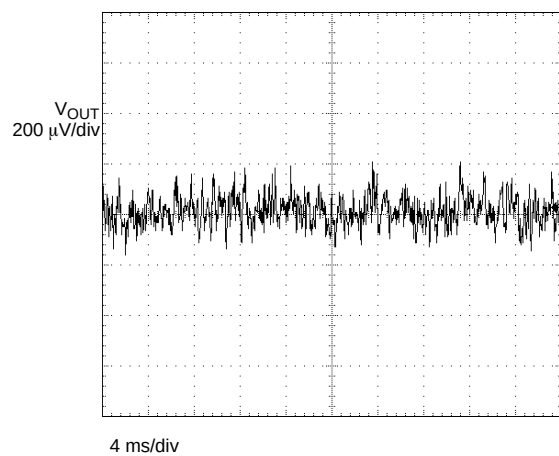


$V_{INSTEP} = 4$ to 5 V
 $V_{OUT} = 3$ V
 $C_{OUT} = 1$ μ F
 $C_{IN} = 1$ μ F
 $I_{LOAD} = 150$ mA
 $t_{rise} = 5$ μ sec

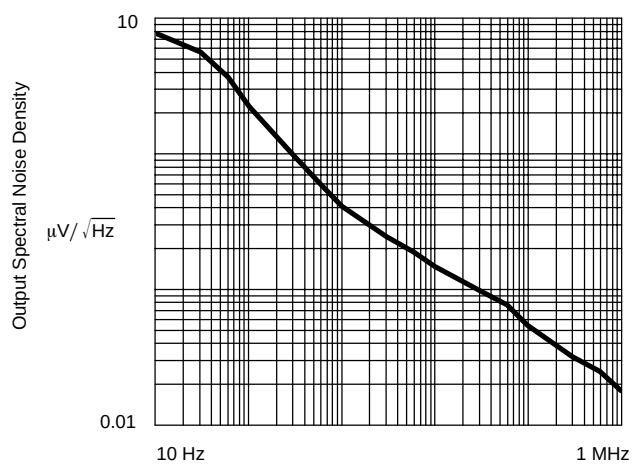
Line Transient Response-2



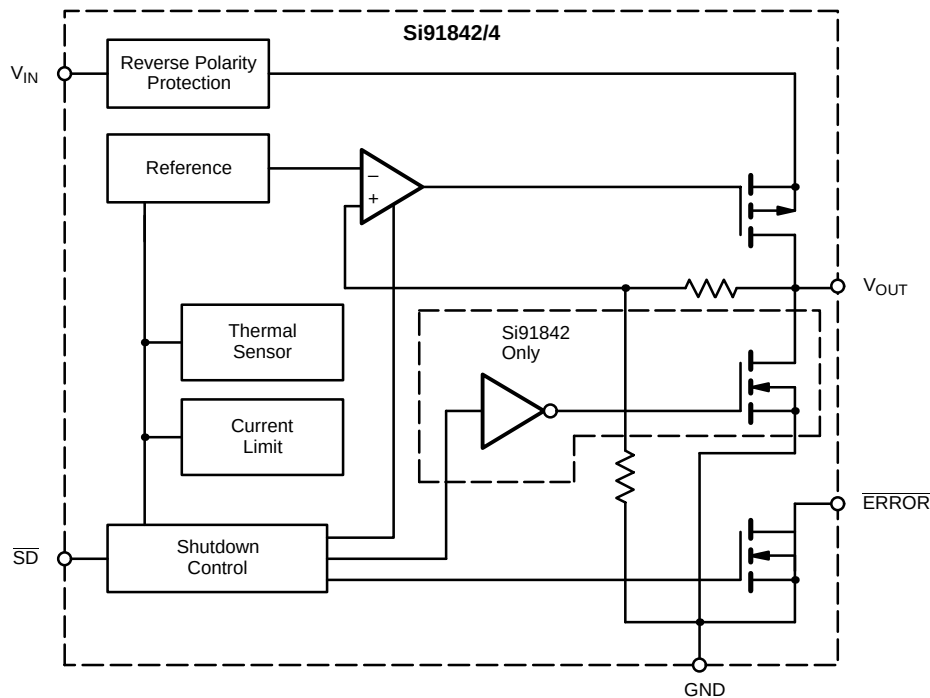
$V_{INSTEP} = 5$ to 4 V
 $V_{OUT} = 3$ V
 $C_{OUT} = 1$ μ F
 $C_{IN} = 1$ μ F
 $I_{LOAD} = 150$ mA
 $t_{fall} = 5$ μ sec

**TYPICAL WAVEFORMS****Output Noise**

$V_{IN} = 4 V$
 $V_{OUT} = 3 V$
 $I_{OUT} = 150 mA$
 $BW = 10 Hz \text{ to } 100 kHz$

Noise Spectrum

$V_{IN} = 4 V$
 $V_{OUT} = 3 V$
 $I_{LOAD} = 150 mA$

**BLOCK DIAGRAM****DETAILED DESCRIPTION**

The Si91842/4 is a low-noise, low drop-out and low quiescent current linear voltage regulator, packaged in a small footprint SOT23-5 package. The Si91842/4 can supply loads up to 300 mA. As shown in the block diagram, the circuit consists of a bandgap reference, error amplifier, p-channel pass transistor and feedback resistor string. Additional blocks, not shown in the block diagram, include a precise current limiter, reverse battery and current protection, and thermal sensor.

Thermal Overload Protection

The thermal overload protection limits the total power dissipation and protects the device from being damaged. When the junction temperature exceeds 150°, the device turns the p-channel pass transistor off.

Reverse Battery Protection

The Si91842/4 has a battery reverse protection circuitry that disconnects the internal circuitry when V_{IN} drops below the GND voltage. There is no current drawn in such an event. When the $\overline{SD}$ pin is hardwired to V_{IN} , the user must connect the $\overline{SD}$ pin to V_{IN} via a 100-k Ω resistor if reverse battery

protection is desired. Hardwiring the $\overline{SD}$ pin directly to the V_{IN} pin is allowed when reverse battery protection is not desired.

ERROR

$\overline{ERROR}$ is an open drain output that goes low when V_{OUT} is less than 4% of its normal value. To obtain a logic level output, connect a pull-up resistor from $\overline{ERROR}$ to V_{OUT} or any other voltage equal to or less than V_{IN} . $\overline{ERROR}$ pin is high impedance (off) when $\overline{SD}$ pin is low.

Auto-Discharge/No-Discharge

V_{OUT} has an internal 100- Ω (typ.) discharge path to ground when $\overline{SD}$ pin is low for the Si91842. The Si91844 does not have a discharge path when the $\overline{SD}$ pin is low.

Stability

The circuit is stable with only a small output capacitor equal to 6 nF/mA ($\approx 1 \mu\text{F}$ @ 150 mA). Since the bandwidth of the error amplifier is around 1–3 MHz and the dominant pole is at the output node, the capacitor should be capacitive in this range, i.e., for 150-mA load current, an ESR <0.4 Ω is necessary. Parasitic inductance of about 10 nH can be tolerated.