

Low Noise Dual Operational Amplifier

IR94558/IR94558N/IR94559/IR94559N

T-79-06-20

IR94558/IR94558N/IR94559/IR94559N

Low Noise Dual Operational Amplifier


Description

The IR94558/IR94558N and IR94559/IR94559N are low noise dual operational amplifiers. High input resistance, wide common mode input voltage range, and absence of latch-up make these amplifiers ideal for voltage-follower applications.


Features

1. No frequency compensation required
2. High input impedance $5M\Omega$ (TYP.)
3. Short circuit protected outputs
4. 8-pin dual-in-line package (IR94558/IR94559)
8-pin small-outline package (IR94558N/IR94559N)

Pin Connections

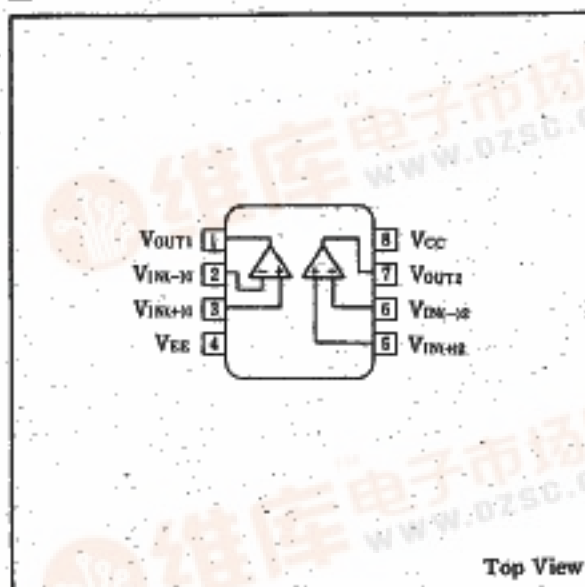

Equivalent Circuit

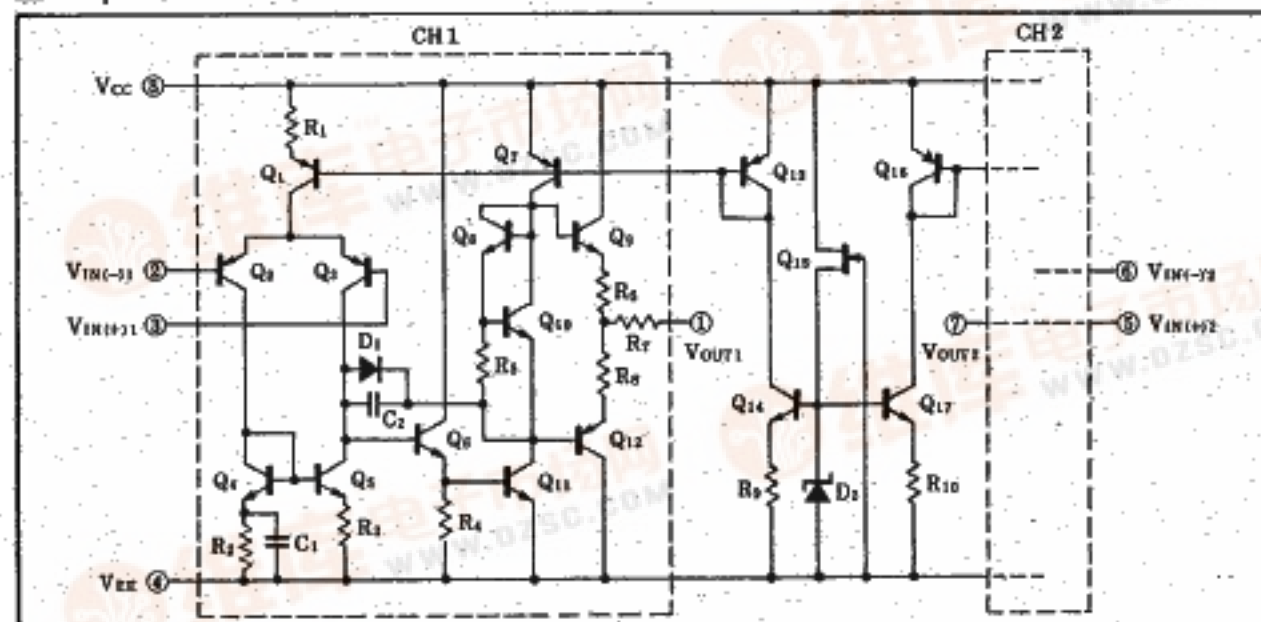

SHARP

■ Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Condition		Rating	Unit
Supply voltage	$V_{CC}-V_{EE}$			36	V
Differential input voltage	V_{ID}			± 30	V
In-phase input voltage *1	V_{ICM}			± 15	V
Power dissipation	P_D	$T_a \leq 25^\circ\text{C}$	IR94558/IR94559	500	mW
			IR94558N/IR94559N	500	
P_D derating ratio	$\Delta P_D/^\circ\text{C}$	$T_a > 25^\circ\text{C}$	IR94558/IR94559	5	mW/°C
			IR94558N/IR94559N	4	
Operating temperature	T_{opr}			-20 ~ +75	°C
Storage temperature	T_{str}			-55 ~ +150	°C


■ Electrical Characteristics

(V_{CC}=15V, V_{EE}=-15V, Ta=25°C)


Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Input offset voltage	V_{IO}	$R_S \leq 10k\Omega$		0.5	6	mV
Input offset current	I_{IO}			5	200	nA
Input bias current	I_B			40	500	nA
Input impedance	Z_{in}		0.3	5		MΩ
In-phase input voltage	V_{ICM}		± 12	± 14		V
Major amplitude voltage gain	A_V	$R_L \geq 2k\Omega$, $V_{OUT} = \pm 10V$	86	110		dB
Maximum output voltage	V_{OM}	$R_L \geq 10k\Omega$ $R_L \geq 2k\Omega$	± 12 ± 10	± 14 ± 13		V
Common signal rejection ratio	CMR	$R_S \leq 10k\Omega$	70	90		dB
Supply voltage rejection ratio	SVR	$R_S \leq 10k\Omega$		30	150	μV/V
Power dissipation	P_D			105	170	mW
Input conversion noise voltage	V_{NI}	$R_S = 1k\Omega$, BW=10Hz~30kHz		2.5		μV _{rms}
Gain band product	G.B.	$R_L = 2k\Omega$	IR94558/IR94558N IR94559/IR94559N	3.0 6.0		MHz
Slew rate	SR	$R_L \geq 2k\Omega$	IR94558/IR94558N IR94559/IR94559N	1.0 2.0		V/μs

■ Electrical Characteristic Curves (Unless otherwise specified, V_{CC}=15V, V_{EE}=-15V, Ta=25°C)


Input bias current—Ambient temperature Characteristics

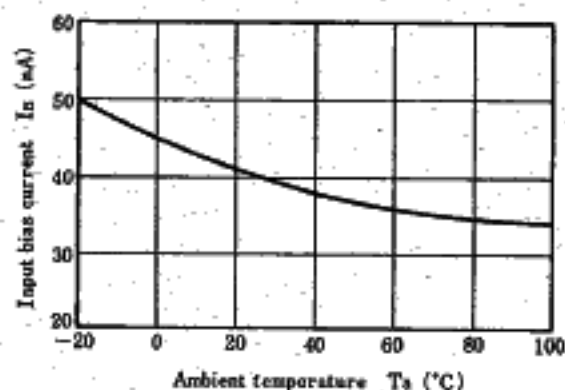


Maximum output amplitude voltage—Load resistance Characteristics

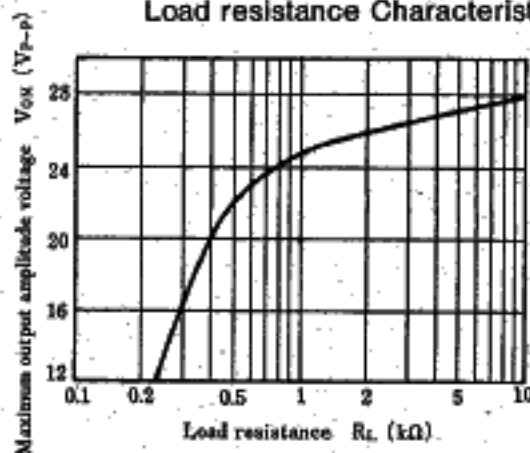

Maximum output voltage—Supply voltage Characteristics

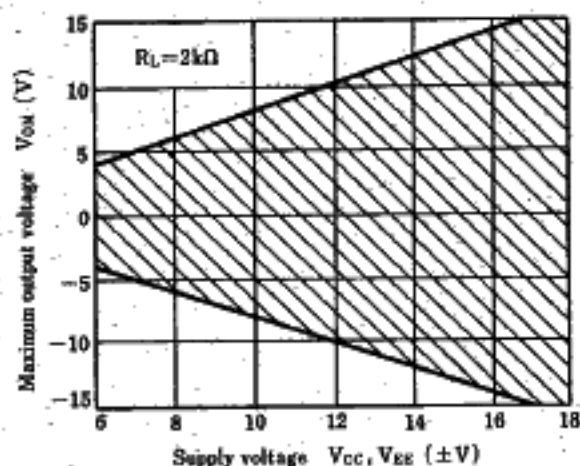


Input conversion noise voltage—Frequency Characteristics

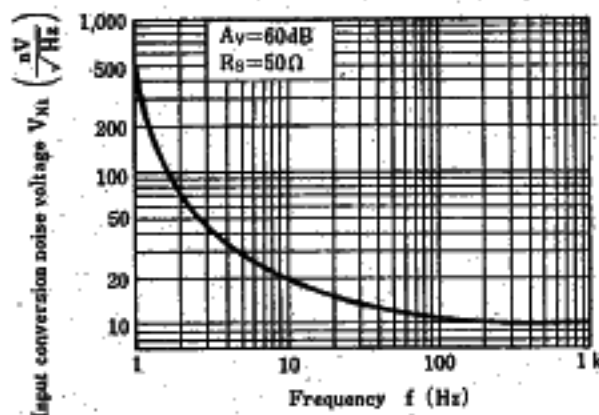

3

Open loop voltage gain—Frequency Characteristics

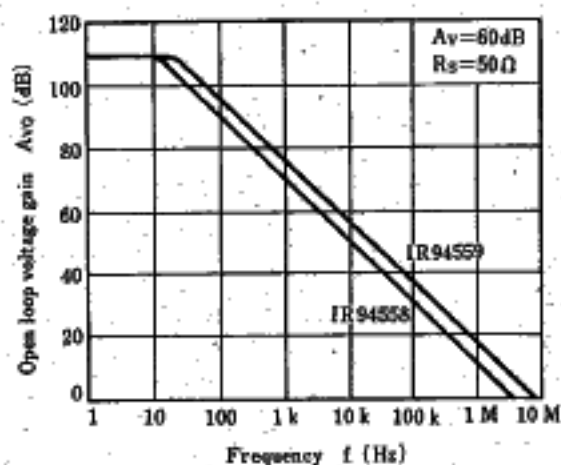

Maximum output amplitude voltage—Frequency Characteristics

