



DEVICE NAME : JG 7905


Mechanical Data :

Page # : 1 of 1

Date : 07/09/98

ISSUED BY : Joan Low Poh Chee

Rev Date : Index #:

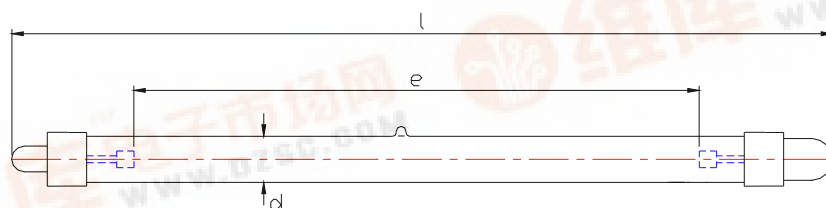

Dimension(mm)

e	495 ± 3	l	572 ± 2	d	10 ± 0.5
r		g		x	

Polarity :

Without Colour Corrective Coating :

Remarks:

1. Envelope material : Q1, Q2 or Q3

Operating Data :

Max. Power Pmax/W		Trigger coil TR	STS 60/8
Nom. Power Pnom / W		Trigger capacitor Cz/μF	0.1
Max. flashenergy Emax/Ws	200	Min. trigger voltage Uz min/V	500
Nom. flashenergy Enom/Ws		Trigger contact S	SCR
Max. anode voltage Uamax/V	2200	Flash frequency/Hz	
Nom. anode voltage Uanom/V	2100	Life/Number of flashes/N	1 x 10p7
Min. anode voltage Uamin/V	1500	Repetition rate trep/ s	1.3
Nom.flash capacitor CB/ μF		Sec trigger voltage Uz sec / KV	
Light reduction after life/ %		(Unloaded)	

Remarks :