

POWEREX INC

98

DE

7294621 0002560 3

T-39-L5

POWEREX


J1224505
JT225005

Tentative


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Split-Dual FETMOD™ Power Modules

50 Amperes/450-500 Volts

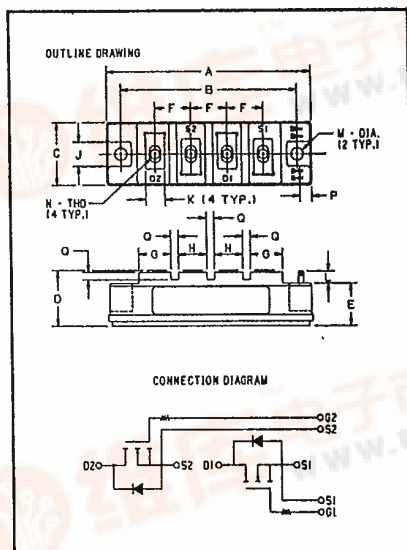

450-500 Volts JT224505, JT225005 Outline Drawing

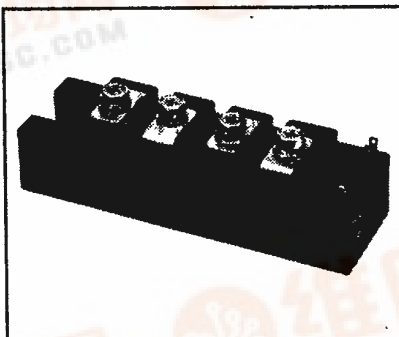

JT224505
JT225005
Split-Dual FETMOD™
Power Modules
50 Amperes/450-500 Volts

Description

Powerex Split-Dual FETMOD™ Power Modules are designed for use in applications requiring high-frequency switching and low loss control. The modules are isolated, consisting of two MOSFETs with internal series gate resistors and independent connections.

Features:

- ☐ Isolated Mounting
- ☐ Vertical-DMOS Chips
- ☐ High Speed Body Diode
- ☐ Low Drive Requirement
- ☐ Low $R_{DS(on)}$
- ☐ Internal Series Gate Resistors
- ☐ Fast Switching

Applications:

- ☐ Choppers
- ☐ UPS Inverters
- ☐ Switch Mode Power Supply
- ☐ PWM Regulators
- ☐ Welding Power Supply

Ordering Information

Example: Select the complete eight digit module part number you desire from the table - i.e. JT225005 is a 500 Volt, 50 Ampere Split-Dual FETMOD™ Module.

Dimension	Inches	Millimeters
A	4.252 Max.	108 Max.
B	3.661 ± .012	93 ± 0.3
C	1.338 Max.	34 Max.
D	1.181 Max.	30 Max.
E	.906	23
F	.748	19
G	.650	16.5
H	.591	15
J	.512	13
K	.394	10
L	.256 Min.	6.5 Min.
M	.256 Dia.	6.5 Dia.
N	M5 Metric	M5
P	.197	5
Q	.157	4

Type	V _{DS} Volts (×10)	Current Rating Amperes (×10)
JT22	45	05
JT22	50	05



Tentative

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

JT224505

JT225005

Split-Dual FETMOD™ Power Modules

50 Amperes/450-500 Volts

Maximum Ratings $T_J = 25^\circ\text{C}$ unless otherwise specified

	Symbol	JT224505/JT225005	Units
Junction Temperature	T_J	- 40 to 150	$^\circ\text{C}$
Storage Temperature	T_{STG}	- 40 to 125	$^\circ\text{C}$
Drain Source Voltage	V_{DS}	450/500	Volts
Gate-Source Voltage	V_{GS}	± 20	Volts
Continuous Drain Current	I_D	40	Amperes
Continuous Source Current	I_S	40	Amperes
Pulsed Drain Current Repetitive	I_{DM}	150	Amperes
Power Dissipation	P_T	420	Watts
Max. Mounting Torque Terminal Screws (M5)	—	17	in.-lb.
Max. Mounting Torque Mounting Screws (M6)	—	26	in.-lb.
Module Weight	—	250	Grams
V isolation	V_{RMS}	2500	Volts

Static Electrical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	JT224505/JT225005			Units
			Min.	Typ.	Max.	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = V_{\text{DSS}}, V_{\text{GS}} = 0\text{V}$	—	—	1	mA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = 0.8 V_{\text{DSS}}, V_{\text{GS}} = 0\text{V}$ $T_J = 150^\circ\text{C}$	—	—	10	mA
Gate Source Threshold	$V_{\text{GS(th)}}$	$I_D = 1\text{ mA}, V_{\text{DS}} = 10\text{V}$	2	3	4	Volts
Gate Source Leakage	$\pm I_{\text{GSS}}$	$\pm V_{\text{GS}} = \pm 20\text{V}$ $V_{\text{DS}} = 0\text{V}$	—	—	0.5	μA
Drain Source On State Resistance*	$R_{\text{DS(on)}}$	$V_{\text{GS}} = 15\text{V}, I_D = 50\text{A}$ $V_{\text{GS}} = 15\text{V}, I_D = 50\text{A}, T_J = 150^\circ\text{C}$	—	—	0.12 0.24	Ω
Drain Source On State Voltage*	$V_{\text{DS(on)}}$	$V_{\text{GS}} = 15\text{V}, I_D = 50\text{A}$ $V_{\text{GS}} = 15\text{V}, I_D = 50\text{A}, T_J = 150^\circ\text{C}$	—	—	6 12	Volts
Thermal Resistance, Case to Sink Lubricated	$R_{\theta\text{CS}}$	—	—	—	—	$^\circ\text{C/W}$
Thermal Resistance, Junction to Case	$R_{\theta\text{JC}}$	Per Device	—	—	0.3	$^\circ\text{C/W}$

* Pulse Test: Pulse width $\leq 10\mu\text{s}$



Tentative

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

JT224505

JT225005

Split-Dual FETMOD™ Power Modules

50 Amperes/450-500 Volts

Source-Drain Diode Characteristics $T_J = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	JT224505/JT225005			Units
			Min.	Typ.	Max.	
Source-Drain Voltage	V_{SD}	$I_S = 50\text{A}$, $V_{GS} = 0\text{V}$	—	—	2.5	Volts
Reverse Recovery Time	t_{rr}	$I_S = 50\text{A}$, $dI_S/dt = 100\text{A}/\mu\text{s}$, $V_{GS} = 0\text{V}$	—	—	200	μs

Dynamic Electrical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	JT224505/JT225005			Units
			Min.	Typ.	Max.	
Forward Transconductance	g_{fs}	$I_D = 25\text{A}$, $V_{DS} = 10\text{V}$ $t_w \leq 300\mu\text{s}$, Duty = 2%	10	—	—	mhos
Input Capacitance	C_{iss}	$V_{GS} = 0\text{V}$, $V_{DS} = 10\text{V}$, $f = 1\text{ MHz}$	—	5500	9000	pf
Output Capacitance	C_{oss}		—	—	2500	pf
Reverse Transfer Capacitance	C_{rss}		—	—	1000	pf
Total Gate Charge	Q_G	$V_{DD} = 0.8 V_{DSS}$ $V_{GS} = 10\text{V}$, $I_D = 50\text{A}$	—	600	—	nC
Turn On Time**	t_{on}	$V_{DD} = 0.5 V_{DSS}$	—	—	500	ns
Turn Off Time**	t_{off}	$I_D = 25\text{A}$, $V_{GS} = 15\text{V}$ $R_{GEN} = R_{GS} = 50\Omega$	—	—	1300	ns

** Turn on Time (t_{on}) = Turn on Delay ($t_{d(on)}$) + Rise Time (t_r)Turn-off Time (t_{off}) = Turn off Delay ($t_{d(off)}$) + Fall Time (t_f)












Tentative

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

JT224505

JT225005

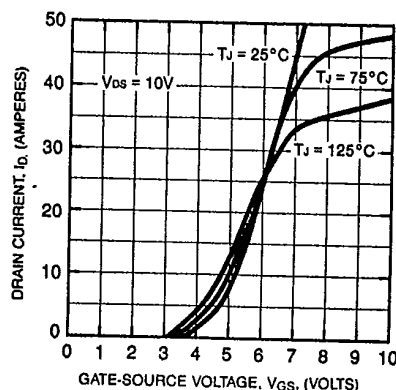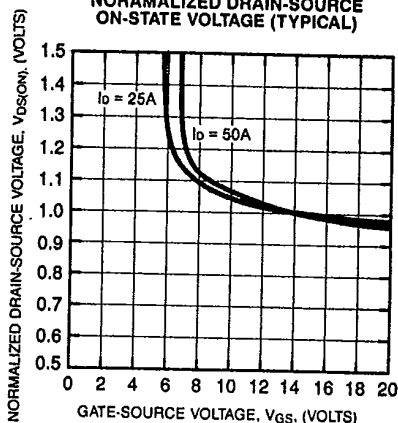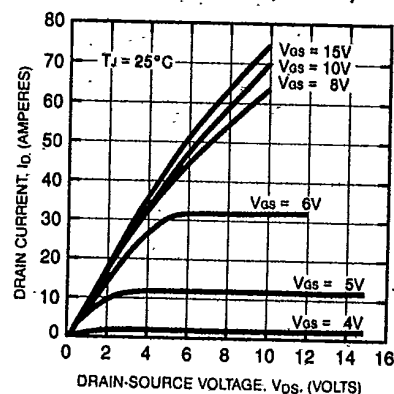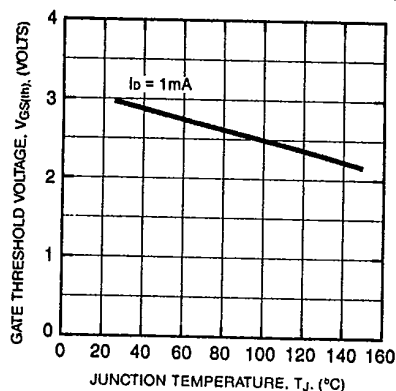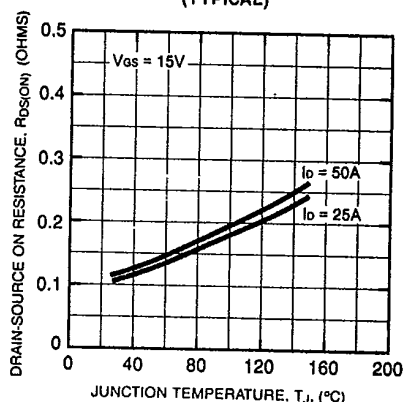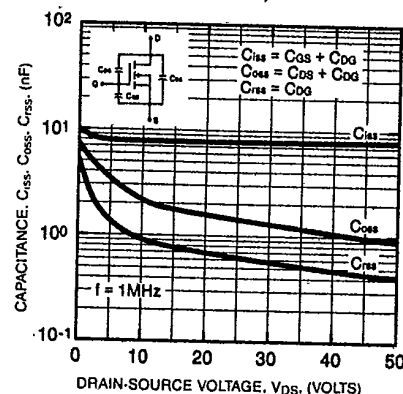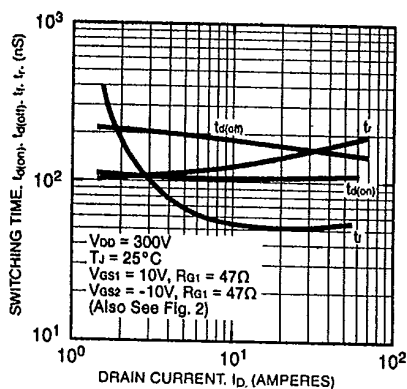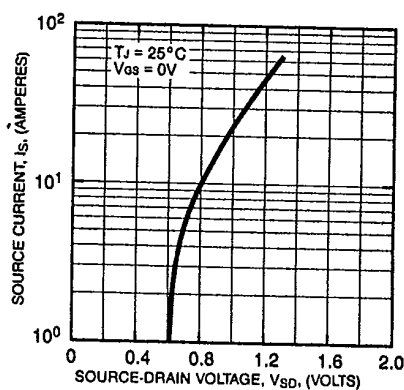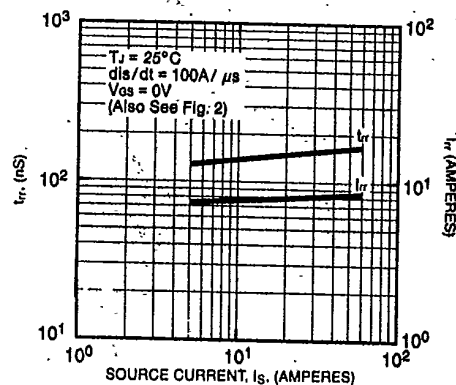Split-Dual FETMOD™ Power Modules
50 Amperes/450-500 VoltsTRANSFER CHARACTERISTICS
(TYPICAL)NORAMALIZED DRAIN-SOURCE
ON-STATE VOLTAGE (TYPICAL)COMMON SOURCE OUTPUT
CHARACTERISTICS (TYPICAL)GATE THRESHOLD
VOLTAGE VS. TEMPERATURE (TYPICAL)ON-RESISTANCE VS. TEMPERATURE
(TYPICAL)CAPACITANCE VS. DRAIN-SOURCE VOLTAGE
(TYPICAL)SWITCHING CHARACTERISTICS
(TYPICAL)SOURCE-DRAIN DIODE
FORWARD CHARACTERISTICS (TYPICAL)SOURCE-DRAIN DIODE REVERSE
RECOVERY CHARACTERISTICS (TYPICAL)



Tentative

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272


JT224505

JT225005


Split-Dual FETMOD™ Power Modules

50 Amperes/450-500 Volts


FORWARD BIAS SAFE OPERATING AREA (S.O.A.)

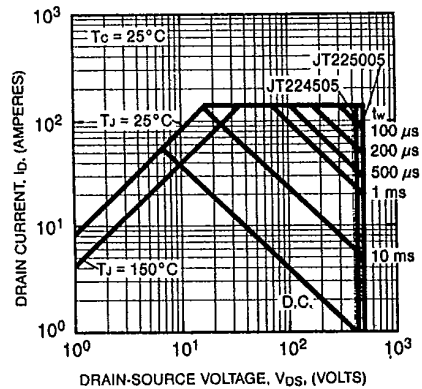


TEMPERATURE DERATING FACTOR OF SAFE OPERATING AREA (S.O.A.)

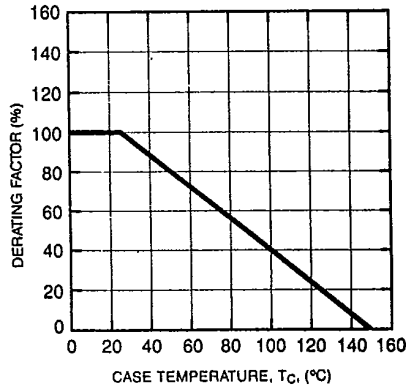


DUTY CYCLE DERATING FACTOR OF SAFE OPERATING AREA (S.O.A.)

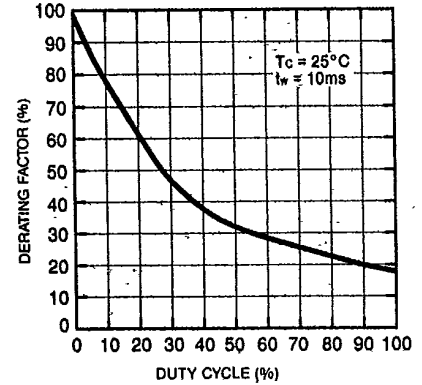


MAXIMUM DRAIN CURRENT VS. CASE TEMPERATURE

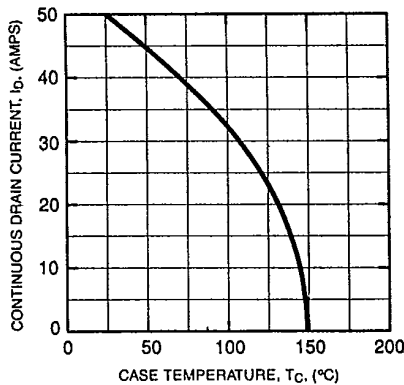


CLAMPED INDUCTIVE LOAD SWITCHING SAFE OPERATING AREA (S.S.O.A.)

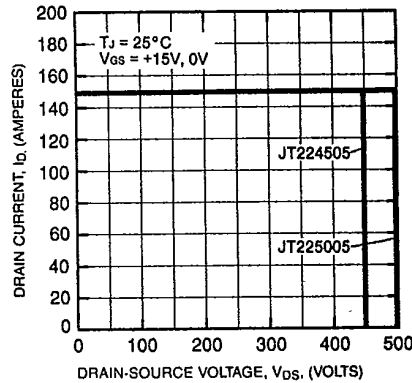


MAXIMUM TURN-OFF di/dt VS. PEAK DRAIN-SOURCE VOLTAGE

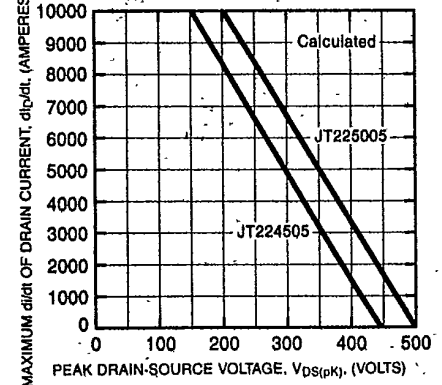


TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (MOSFET)

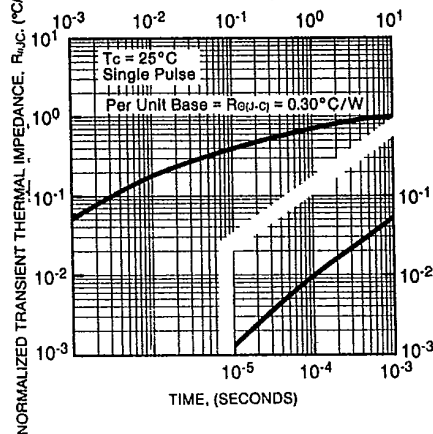

GATE CHARGE VS. Vds AND Vgs (TYPICAL)

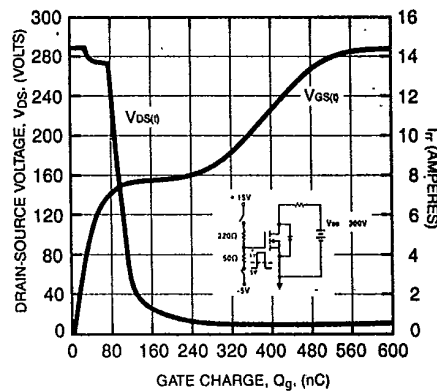

TURN-ON SPEED VS. GATE RESISTANCE (TYPICAL)

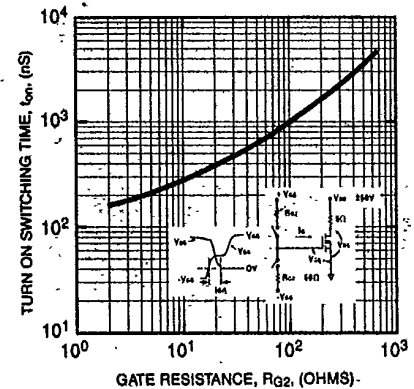



Tentative

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272


JT224505

JT225005


Split-Dual FETMOD™ Power Modules

50 Amperes/450-500 Volts

TURN-OFF SPEED AND
DRAIN-SOURCE VOLTAGE SPIKE
VS. GATE RESISTANCE (TYPICAL)

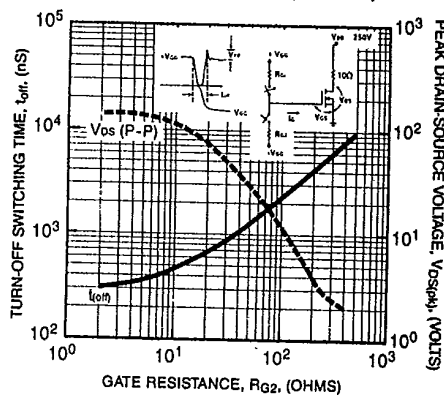

SOURCE-DRAIN DIODE
REVERSE RECOVERY CHARACTERISTICS
(TYPICAL FOR HALF BRIDGE OPERATION)

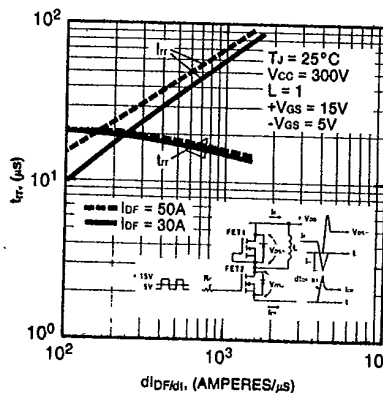

SOURCE-DRAIN DIODE
REVERSE RECOVERY CHARACTERISTICS
(TYPICAL FOR HALF BRIDGE OPERATION)

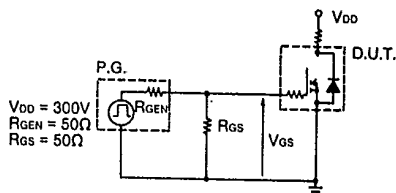
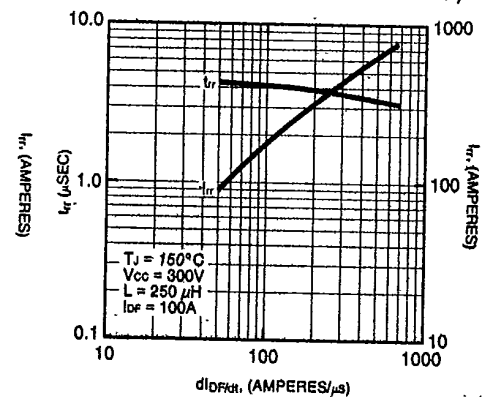


Fig. 1 Switching Time Test Circuit 1

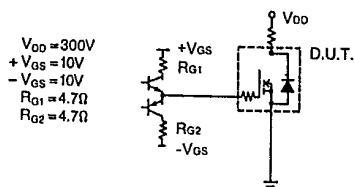


Fig. 2 Switching Time Test Circuit 2

