

POWEREX INC

78 DE 7294621 0002556 1


T-39-15



JT224503  
JT225003 Tentative

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

**Split-Dual  
FETMOD™  
Power Modules  
30 Amperes/450-500 Volts**

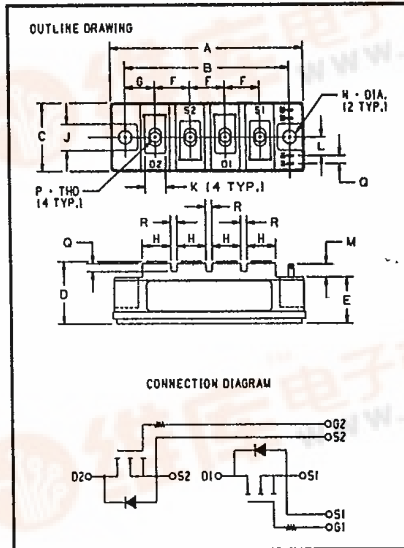

**JT224503  
JT225003  
Split-Dual FETMOD™  
Power Modules  
30 Amperes/450-500 Volts**

**450-500 Volts JT224503, JT225003  
Outline Drawing**

Dimension	Inches	Millimeters
A	3.701	94
B	3.150 ± .010	80 ± 0.25
C	1.338	34
D	1.220 Max.	31 Max.
E	.906	23
F	.669	17
G	.572	14.5
H	.551	14
J	.512	13
K	.394	10
L	.344	8.75
M	.256 Min.	6.5 Min.
N	.256 Dia.	6.5 Dia.
P	M5 Metric	M5
Q	.157	4
R	.118	3

**Description**

Powerex Split-Dual FETMOD™ Modules are designed for use in applications requiring high-frequency switching and low loss control. The modules are isolated, consisting of two MOSFETs with internal series gate resistors and independent connections.

**Features:**

- Isolated Mounting
- Vertical DMOS Chips
- High Speed Body Diode
- Low Drive Requirement
- Low R<sub>DS(on)</sub>
- Internal Series Gate Resistors
- Fast Switching

**Applications:**

- Choppers
- UPS Inverters
- Switch Mode Power Supply
- PWM Regulators
- Welding Power Supply

**Ordering Information**

Example: Select the complete eight digit module part number you desire from the table - i.e. JT225003 is a 500 Volt, 30 Ampere Split-Dual FETMOD™ Module.

Type	V <sub>oss</sub> Volts (×10)	Current Rating Amperes (×10)
JT22	45	03
JT22	50	03





Tentative

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

JT224503

JT225003

Split-Dual FETMOD™ Power Modules

30 Amperes/450-500 Volts

Maximum Ratings  $T_J = 25^\circ\text{C}$  unless otherwise specified

	Symbol	JT224503/JT225003	Units
Junction Temperature	$T_J$	-40 to 150	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-40 to 125	$^\circ\text{C}$
Drain Source Voltage	$V_{DSS}$	450/500	Volts
Gate-Source Voltage	$V_{GSS}$	$\pm 20$	Volts
Continuous Drain Current	$I_D$	25	Amperes
Continuous Source Current	$I_S$	25	Amperes
Pulsed Drain Current Repetitive	$I_{DM}$	90	Amperes
Power Dissipation	$P_T$	250	Watts
Max. Mounting Torque (M5) Terminal Screws	—	17	in.-lb.
Max. Mounting Torque (M6) Mounting Screws	—	26	in.-lb.
Module Weight	—	250	Grams
V isolation	$V_{RMS}$	2500	Volts



Tentative

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

JT224503

JT225003

Split-Dual FETMOD™ Power Modules

30 Amperes/450-500 Volts

### Static Electrical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	JT224503/JT225003			Units
			Min.	Typ.	Max.	
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS} = V_{DSS}, V_{GS} = 0V$	—	—	1	mA
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS} = 0.8 V_{DSS}, V_{GS} = 0V$ $T_J = 150^\circ\text{C}$	—	—	10	mA
Gate Source Threshold	$V_{GS(th)}$	$I_D = 1 \text{ mA}, V_{DS} = 10V$	2	3	4	Volts
Gate Source Leakage	$\pm I_{GSS}$	$\pm V_{GS} = \pm 20V, V_{DS} = 0V$	—	—	0.5	$\mu\text{A}$
Drain Source On State Resistance*	$R_{DS(on)}$	$V_{GS} = 15V, I_D = 30A$	—	—	0.2	$\Omega$
		$V_{GS} = 15V, I_D = 30A, T_J = 150^\circ\text{C}$	—	—	0.4	$\Omega$
Drain Source On State Voltage*	$V_{DS(on)}$	$V_{GS} = 15V, I_D = 30A$	—	—	6	Volts
		$V_{GS} = 15V, I_D = 30A, T_J = 150^\circ\text{C}$	—	—	12	Volts
Thermal Resistance, Case to Sink Lubricated	$R_{\theta CS}$	—	—	—	0.15	$^\circ\text{C/W}$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	Per Device	—	—	0.5	$^\circ\text{C/W}$

\* Pulse Test: Pulse width  $\leq 10\mu\text{s}$



Tentative

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

JT224503

JT225003

Split-Dual FETMOD™ Power Modules  
30 Amperes/450-500 Volts

### Source-Drain Diode Characteristics $T_J = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	JT224503/JT225003			Units
			Min.	Typ.	Max.	
Source-Drain Voltage	$V_{SD}$	$I_S = 30\text{A}, V_{GS} = 0\text{V}$	—	—	2.5	Volts
Reverse Recovery Time	$t_{rr}$	$I_S = 30\text{A}, di/dt = 60\text{A}/\mu\text{s}; V_{GS} = 0\text{V}$	—	160	200	ns

### Dynamic Electrical Characteristics $T_J = 25^\circ\text{C}$ unless otherwise specified

Dynamic Electrical Characteristics	Symbol	Test Conditions	JT224503/JT225003			Units
			Min.	Typ.	Max.	
Forward Transconductance	$g_{fs}$	$I_D = 15\text{A}, V_{DS} = 10\text{V}$ $t_w \leq 300\mu\text{s}, \text{Duty} = 2\%$	10	—	—	mhos
Input Capacitance	$C_{iss}$	$V_{GS} = 0\text{V}, V_{DS} = 10\text{V}, f = 1\text{ Mhz}$	—	—	7000	pf
Output Capacitance	$C_{oss}$		—	—	2000	pf
Reverse Transfer Capacitance	$C_{rss}$	$V_{DD} = 0.8 V_{DSS}$ $V_{GS} = 10\text{V}, I_D = 30\text{A}$	—	360	—	nC
Total Gate Charge	$Q_G$		—	—	800	pf
Turn On Time**	$t_{on}$	$V_{DD} = 0.5 V_{DSS}$ $I_D = 15\text{A}, V_{GS} = 15\text{V}$ $R_{GEN} = R_{GS} = 50\Omega$	—	—	500	ns
Turn Off Time**	$t_{off}$		—	—	1100	ns

\*\* Turn on Time ( $t_{on}$ ) = Turn on Delay ( $t_{d(on)}$ ) + Rise Time ( $t_r$ )  
Turn-off Time ( $t_{off}$ ) = Turn off Delay ( $t_{d(off)}$ ) + Fall Time ( $t_f$ )

This specification is tentative;  
therefore, performance curves are  
not included. Please contact the  
Powerex sales representative  
nearest you for further information.