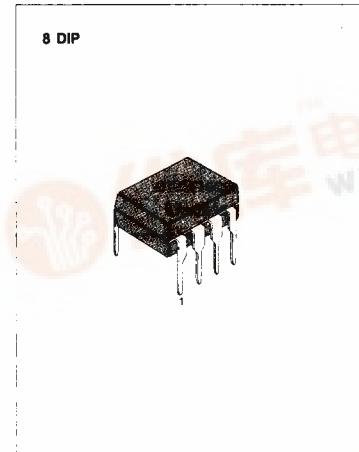


DC MOTOR SPEED CONTROLLER

The KA2401 is a monolithic integrated circuit designed for DC motor speed controllers.

FEATURES

- Suitable for DC motor speed controllers of cassette tape recorders and radio cassettes.
- Excellent stability of each characteristics against ambient temperature.
- Low quiescent current (0.8mA; Typ).
- Low reference voltage.
- Wide operating supply voltage range (4V ~ 12V).



3

ORDERING INFORMATION

Device	Package	Operating Temperature
KA2401	8 DIP	-20°C ~ +70°C

BLOCK DIAGRAM

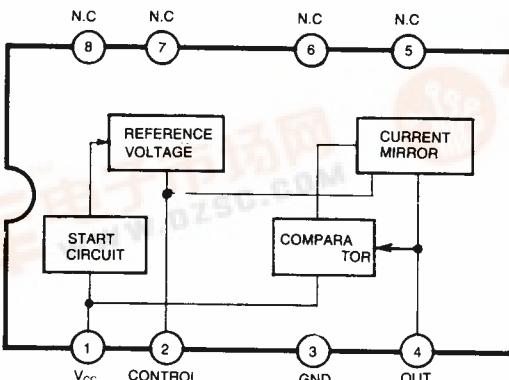


Fig. 1

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

Characteristic	Symbol	Value	Unit
Supply Voltage	V_{CC}	16	V
Circuit Current	I_4	*2	A
Power Dissipation	P_D	600	mW
Operating Temperature	T_{OPR}	-20 ~ +70	°C
Storage Temperature	T_{STG}	-40 ~ +125	°C

*t<5 sec

ELECTRICAL CHARACTERISTICS

(Ta = 25°C, V_{CC} = 6V, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit	Test Fig
Reference Voltage	V_{REF}	$I_4 = 10\text{mA}$	1.10	1.27	1.40	V	2
Quiescent Circuit Current	I_{CCQ}	$R_M = 180\Omega$	0.5	0.8	1.2	mA	5
Current Coefficient	K	$Rm_1 = 44\Omega$, $Rm_2 = 33\Omega$	18	20	22		3
Saturation Voltage	$V_{4(SAT)}$	$V_{CC} = 4.2\text{V}$, $Rm = 4.4\Omega$		1.5	20	V	4
Voltage Characteristic of Shunt-Current Coefficient	$\frac{\Delta K}{K} / \Delta V_{CC}$	$I_4 = 100\text{mA}$, $V_{CC} = 4 \sim 12\text{V}$		0.4		%/V	3
Voltage Characteristic of Reference Voltage	$\frac{\Delta V_{REF}}{V_{REF}} / \Delta V_{CC}$	$I_4 = 100\text{mA}$, $V_{CC} = 4 \sim 12\text{V}$		0.6		%/V	2
Current Characteristic of Current Coefficient	$\frac{\Delta K}{K} / \Delta I_4$	$I_4 = 30 \sim 200\text{mA}$		-0.02		%/mA	3
Current Characteristic of Reference Voltage	$\frac{\Delta V_{REF}}{V_{REF}} / \Delta I_4$	$I_4 = 30 \sim 200\text{mA}$		-0.02		%/mA	2
Temperature Characteristic of Current Coefficient	$\frac{\Delta K}{K} / \Delta T_a$	$I_4 = 100\text{mA}$ $T_a = -20 \sim +75^\circ\text{C}$		0.01		%/°C	3
Temperature Characteristic of Reference Voltage	$\frac{\Delta V_{REF}}{V_{REF}} / \Delta T_a$	$I_4 = 100\text{mA}$ $T_a = -20 \sim +75^\circ\text{C}$		0.01		%/°C	2

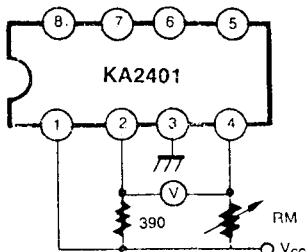
TEST CIRCUIT 1

Fig. 2

$$V_{ref}, \frac{\Delta V_{REF}}{V_{REF}}/\Delta V_{CC}, \frac{\Delta V_{REF}}{V_{REF}}/\Delta I_4, \frac{\Delta V_{REF}}{V_{REF}}/\Delta T_a$$

TEST CIRCUIT 2

Current Coefficient

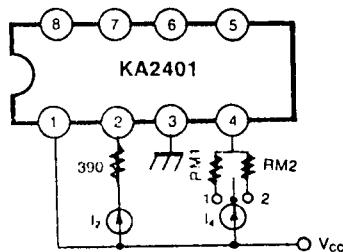


Fig. 3

$$K, \frac{\Delta K}{K}/\Delta V_{CC}, \frac{\Delta K}{K}/\Delta I_4, \frac{\Delta K}{K}/\Delta T_a$$

$$K = \frac{I_4 (\text{SW 2}) - I_4 (\text{SW 1})}{I_2 (\text{SW 2}) - I_2 (\text{SW 1})}$$

TEST CIRCUIT 3

Saturation Voltage

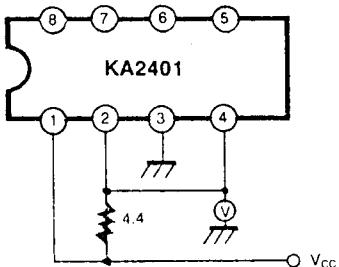


Fig. 4

TEST CIRCUIT 4

Quiescent Circuit Current

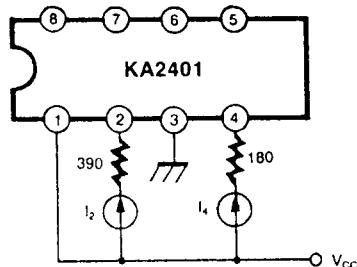
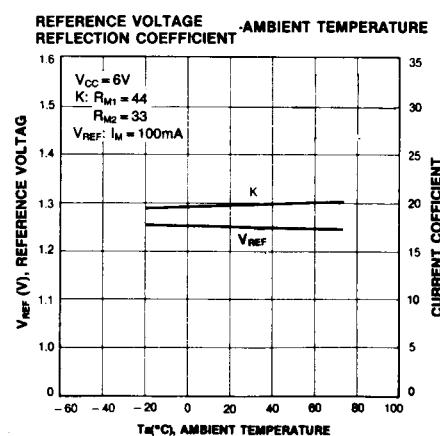
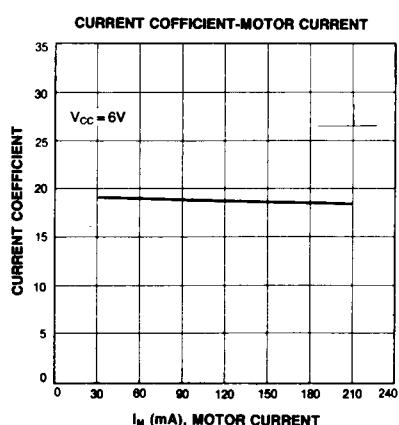
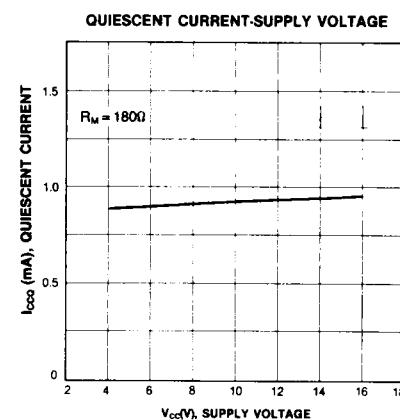
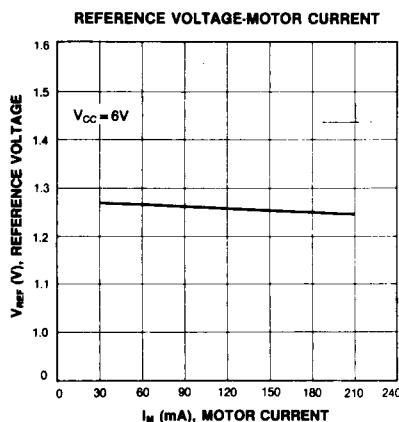
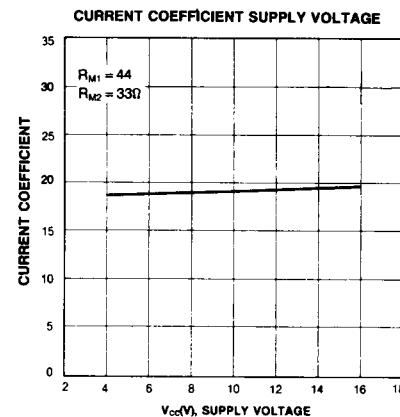
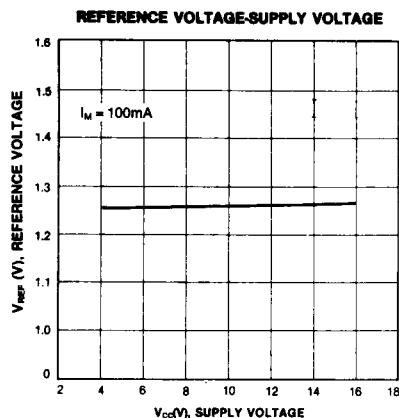
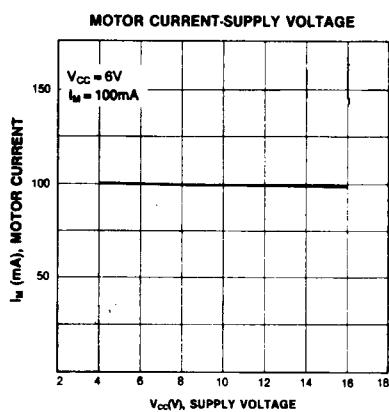


Fig. 5





APPLICATION CIRCUIT

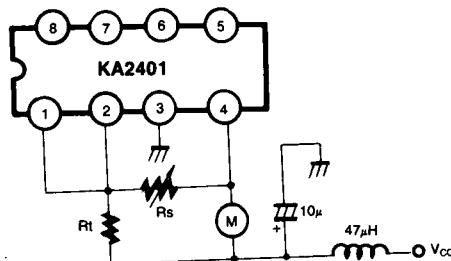


Fig. 6