




Band pass filters for the receiving RF circuits of transceiver

- High stability and reliability with good performance and no adjustment.
- Wide and sharp pass band characteristics.
- Low insertion loss and deep stop band attenuation for interference.
- KF433S : SC-45 package
KF433V : SC-44 package.
- F-11 Package : KF433.

MAXIMUM RATINGS (Ta=25℃)

ITEM	SYMBOL	RATING	UNIT
Input Signal Level	IS _{max}	0	dBm
DC Permissive Voltage	V _{DC}	+10	V
Operating Temperature Range	T _{opr}	-20~+60	℃
Storage Temperature Range	T _{stg}	-30~+85	℃

MARKING

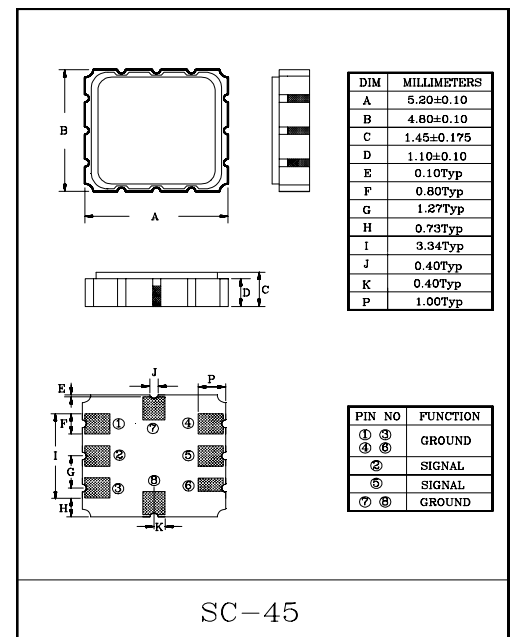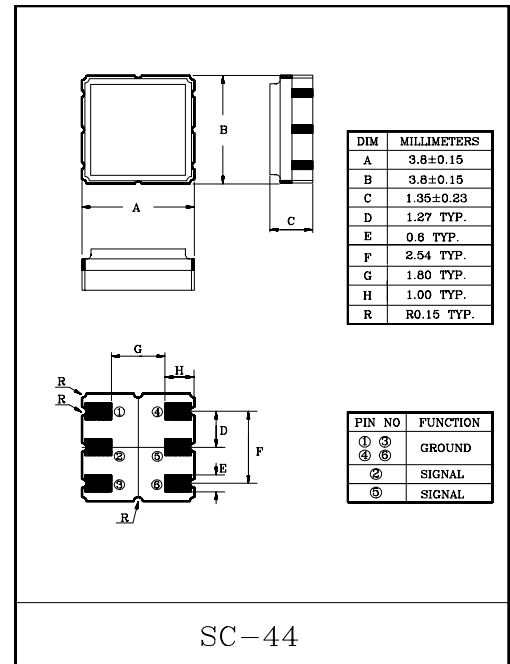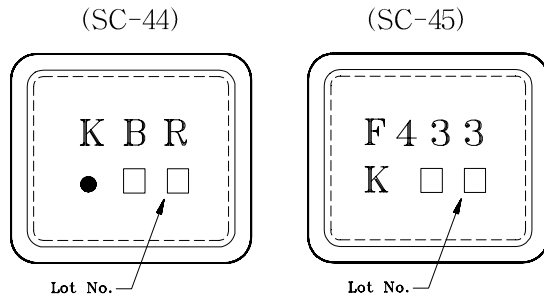


ELECTRICAL CHARACTERISTICS (Temperature 20±2℃, Humidity 65±5%)


ITEMS	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Nominal Center Frequency	f _o	-	-	433.5	-	MHz
Bandwidth	BW _{3dB}	-	f _o ±2.0	-	-	MHz
Insertion Loss	IL _{PASS}	f _o ±2.0MHz	-	-	4.0	dB
Ripple Level	A _{RIP}	f _o ±2.0MHz	-	-	2.0	dB
Rejection Level	IL _{STOP}	f _o -12.7~f _o -8.7MHz	8	-	-	dB
		f _o -44.8~f _o -40.8MHz	50	-	-	dB
		f _o +40.8~f _o +44.8MHz	45	-	-	dB
Input/Output Impedance	Z _i (Z _o)	-	-	50Ω//0pF	-	-

TEST CIRCUIT

REFERENCE LEVEL TEST CIRCUIT

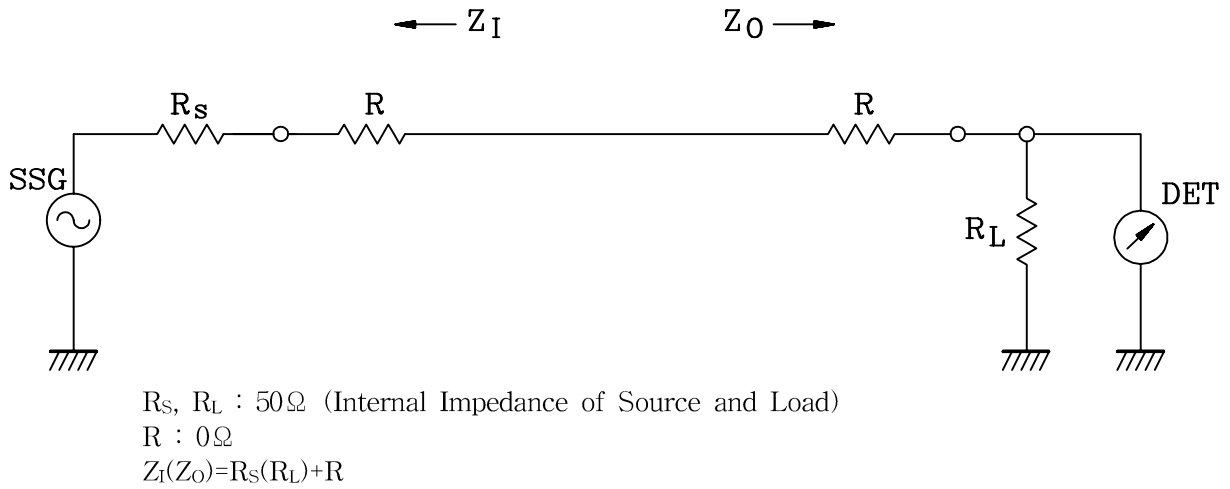

MEASUREMENT CIRCUIT (SC-45)

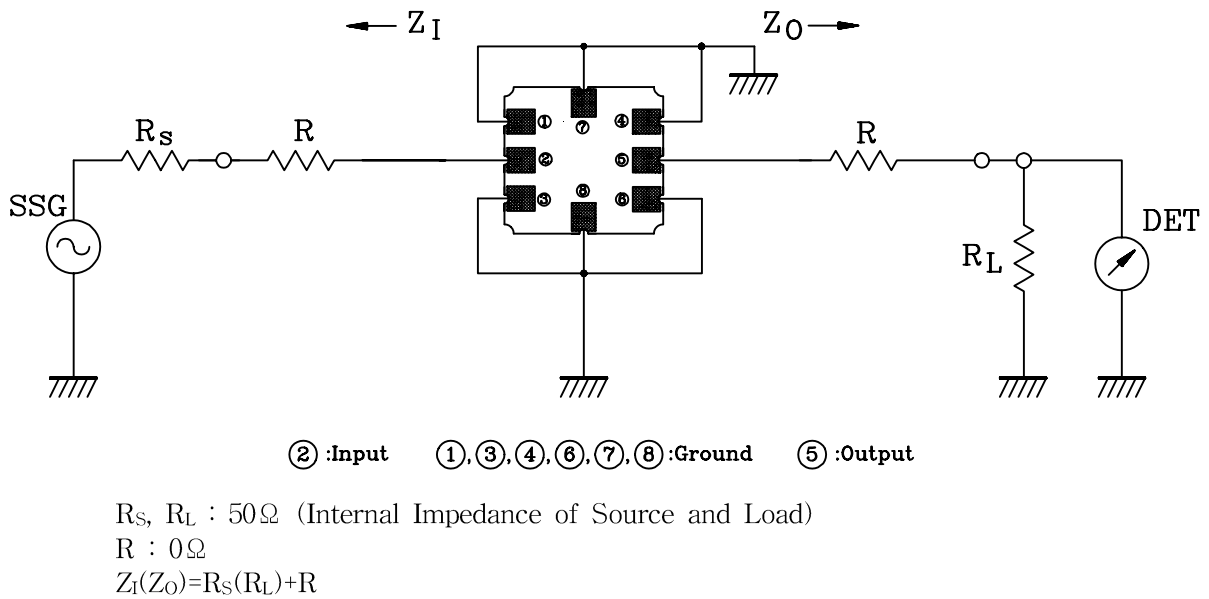

(SC-44)

