


Band pass filters for the receiving RF circuits of transceiver

- High stability and reliability with good performance and no adjustment.
- Wide and sharp pass band characteristics.
- Low insertion loss and deep stop band attenuation for interference.
- SMD Package Type : (SC-45)KF440S, (SC-44)KF440V.

MAXIMUM RATINGS (Ta=25℃)

ITEM	SYMBOL	RATING	UNIT
Input Signal Level	IS _{max}	0	dBm
DC Permissive Voltage	V _{DC}	+10	V
Operating Temperature Range	T _{opr}	-10~+50	℃
Storage Temperature Range	T _{stg}	-30~+85	℃

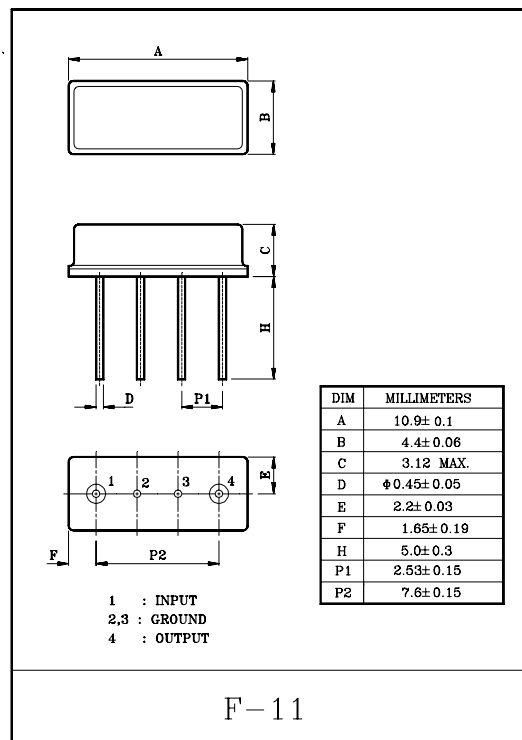


ELECTRICAL CHARACTERISTICS (Temperature 20±2℃, Humidity 65±5%)

ITEMS	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Nominal Center Frequency	f _o	-	-	440	-	MHz
Bandwidth	BW _{3dB}	-	f _o ±5	-	-	MHz
Insertion Loss	IL _{PASS}	f _o ±5MHz	-	-	4.0	dB
Ripple Level	A _{RIP}	f _o ±5MHz	-	-	2.0	dB
Rejection Level	IL _{STOP}	f _o -100~f _o -80MHz	55	-	-	dB
		f _o +80~f _o +100MHz	45	-	-	dB
Input/Output Impedance	Z _i (Z _o)	-	-	50Ω//0pF	-	-


TEST CIRCUIT

REFERENCE LEVEL TEST CIRCUIT

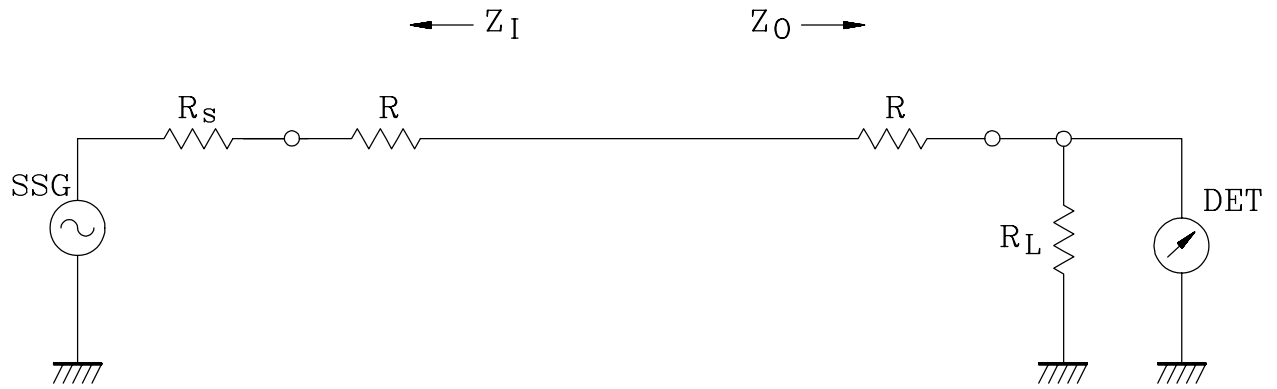

$R_s, R_L : 50\Omega$ (Internal Impedance of Source and Load)
 $R : 0\Omega$
 $Z_I(Z_O)=R_s(R_L)+R$

MEASUREMENT CIRCUIT

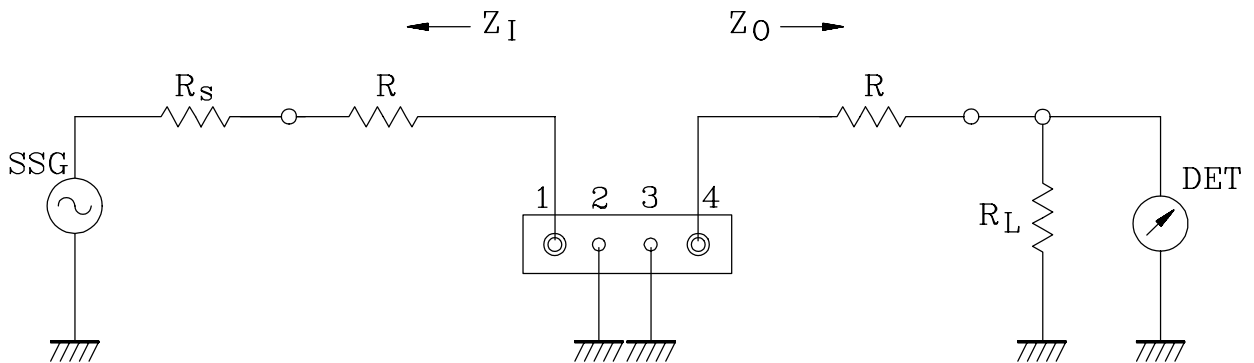

1: INPUT

2,3: GROUND

4: OUTPUT

$R_s, R_L : 50\Omega$ (Internal Impedance of Source and Load)
 $R : 0\Omega$
 $Z_I(Z_O)=R_s(R_L)+R$

KF440

