



TYPICAL PASSBAND CHARACTERISTIC

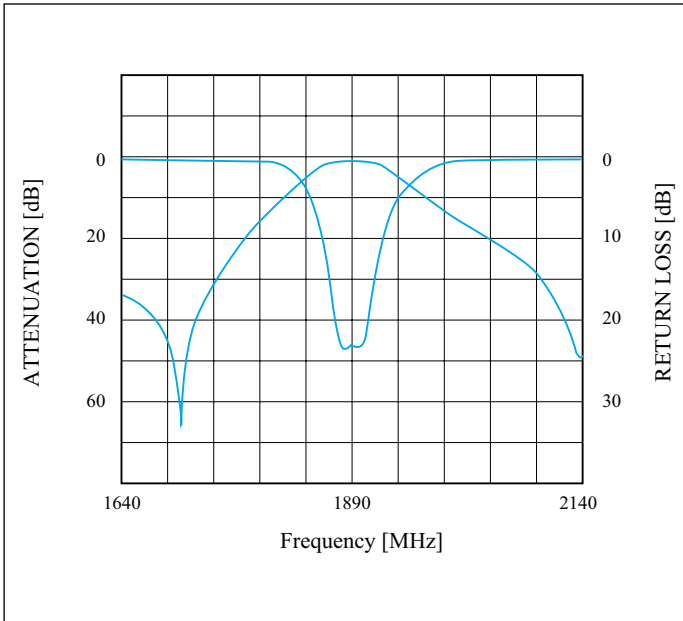

DIMENSION

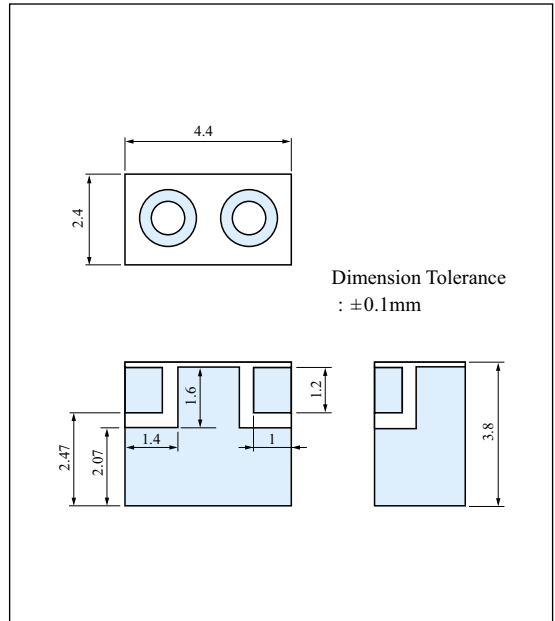

SPECIFICATION

Application	DECT				
	SYMBOL	Min	Typ.	Max.	Unit
Center Frequency	f_o		1890		MHz
Bandwidth	BW	$f_o \pm 10$			MHz
Insertion Loss	IL			1.5	dB
Ripple				0.5	dB
Standing Wave Ratio	VSWR			2.0	
Impedance	Z		50		Ω
Attenuation	1660~1680MHz 1770~1790MHz 3760~3800MHz 5640~5700MHz	30 10 10 10			dB