


SWITCHING APPLICATION.  
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

#### FEATURES


- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- High Packing Density.

#### EQUIVALENT CIRCUIT

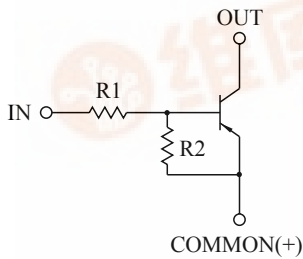

#### BIAS RESISTOR VALUES

TYPE NO.	R1(kΩ)	R2(kΩ)
KRA301V	4.7	4.7
KRA302V	10	10
KRA303V	22	22
KRA304V	47	47
KRA305V	2.2	47
KRA306V	4.7	47

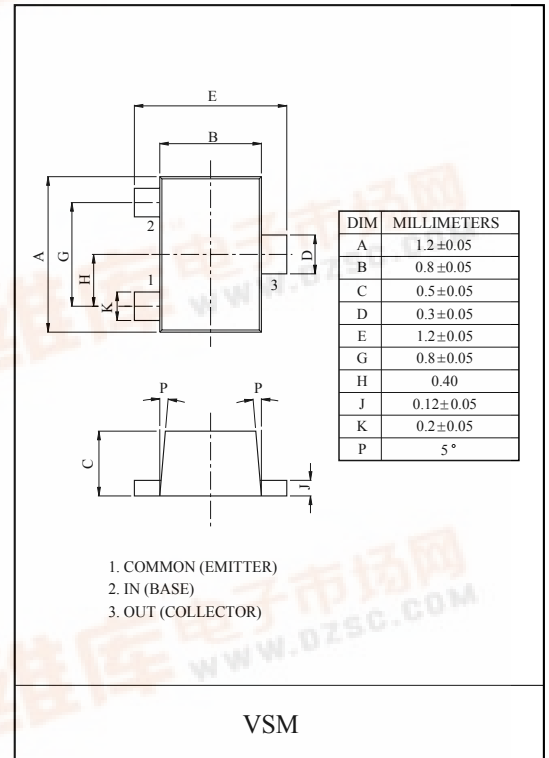


#### MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRA301V~306V	$V_o$	-50	V
Input Voltage	KRA301V	$V_i$	-20, 10	V
	KRA302V		-30, 10	
	KRA303V		-40, 10	
	KRA304V		-40, 10	
	KRA305V		-12, 5	
	KRA306V		-20, 5	
Output Current	KRA301V~306V	$I_o$	-100	mA
Power Dissipation		$P_D$	100	mW
Junction Temperature		$T_j$	150	°C
Storage Temperature Range		$T_{stg}$	-55 ~ 150	°C

#### MARK SPEC

TYPE	KRA301V	KRA302V	KRA303V	KRA304V	KRA305V	KRA306V
MARK	PA	PB	PC	PD	PE	PF

#### Marking

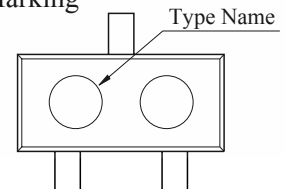

# KRA301V~KRA306V

## ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRA301V ~ 306V	$I_{O(OFF)}$	$V_O=-50V, V_I=0$	-	-	-500	nA
DC Current Gain	KRA301V	$G_I$	$V_O=-5V, I_O=-10mA$	30	55	-	
	KRA302V			50	80	-	
	KRA303V			70	120	-	
	KRA304V			80	200	-	
	KRA305V			80	200	-	
	KRA306V			80	200	-	
Output Voltage	KRA301V ~ 306V	$V_{O(ON)}$	$I_O=-10mA, I_I=-0.5mA$	-	-0.1	-0.3	V
Input Voltage (ON)	KRA301V	$V_{I(ON)}$	$V_O=-0.2V, I_O=-5mA$	-	-1.5	-2.0	V
	KRA302V			-	-1.8	-2.4	
	KRA303V			-	-2.1	-3.0	
	KRA304V			-	-2.8	-5.0	
	KRA305V			-	-0.8	-1.1	
	KRA306V			-	-0.9	-1.3	
Input Voltage (OFF)	KRA301V ~ 304V	$V_{I(OFF)}$	$V_O=-5V, I_O=-0.1mA$	-1.0	-1.2	-	V
	KRA305V ~ 306V			-0.5	-0.65	-	
Transition Frequency	KRA301V ~ 306V	$f_T^*$	$V_O=-10V, I_O=-5mA$	-	200	-	MHz
Input Current	KRA301V	$I_I$	$V_I=-5V$	-	-	-1.8	mA
	KRA302V			-	-	-0.88	
	KRA303V			-	-	-0.36	
	KRA304V			-	-	-0.18	
	KRA305V			-	-	-3.6	
	KRA306V			-	-	-1.8	







Note : \* Characteristic of Transistor Only.

# KRA301V~KRA306V







## ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRA301V	V <sub>O</sub> =-5V V <sub>IN</sub> =-5V R <sub>L</sub> =1kΩ	-	0.07	-	μS
		KRA302V		-	0.06	-	
		KRA303V		-	0.2	-	
		KRA304V		-	0.24	-	
		KRA305V		-	0.02	-	
		KRA306V		-	0.07	-	
	Storage Time	KRA301V		-	1.1	-	
		KRA302V		-	1.1	-	
		KRA303V		-	1.1	-	
		KRA304V		-	1.1	-	
		KRA305V		-	1.1	-	
		KRA306V		-	1.1	-	
	Fall Time	KRA301V		-	0.15	-	
		KRA302V		-	0.24	-	
		KRA303V		-	0.38	-	
		KRA304V		-	0.63	-	
		KRA305V		-	0.1	-	
		KRA306V		-	0.2	-	

# KRA301V~KRA306V

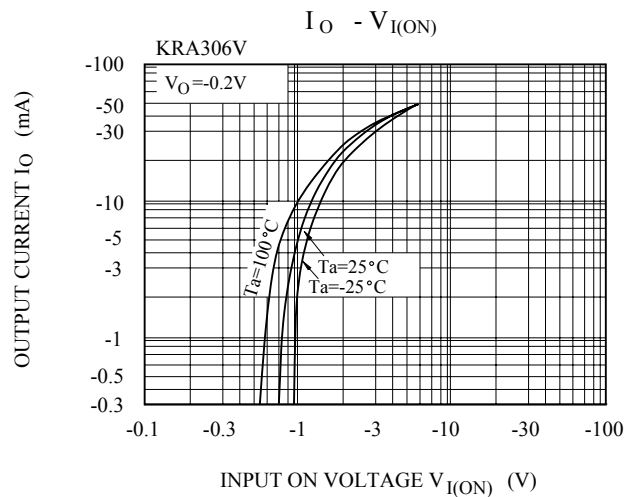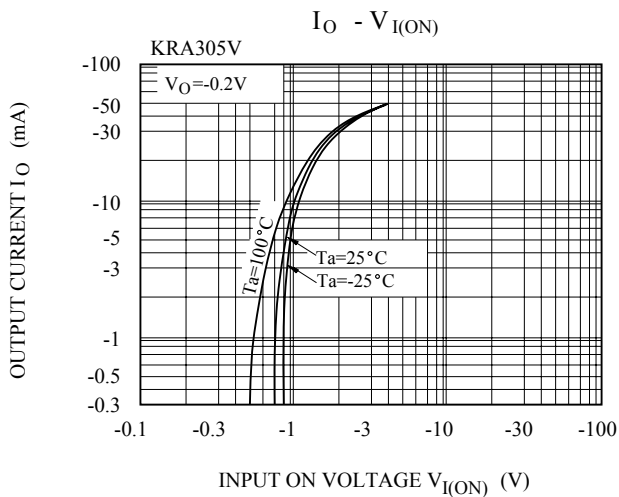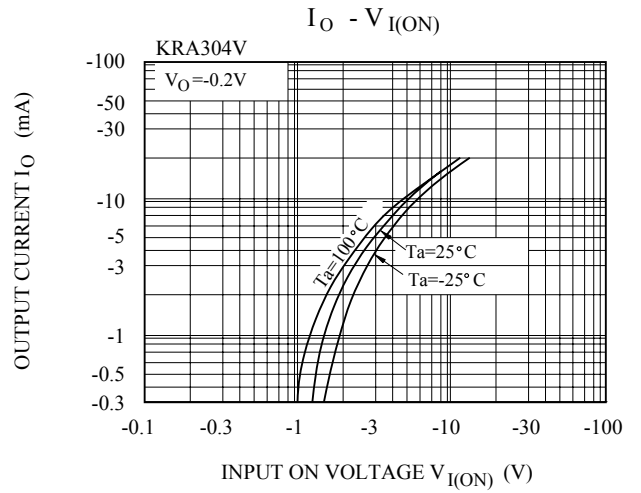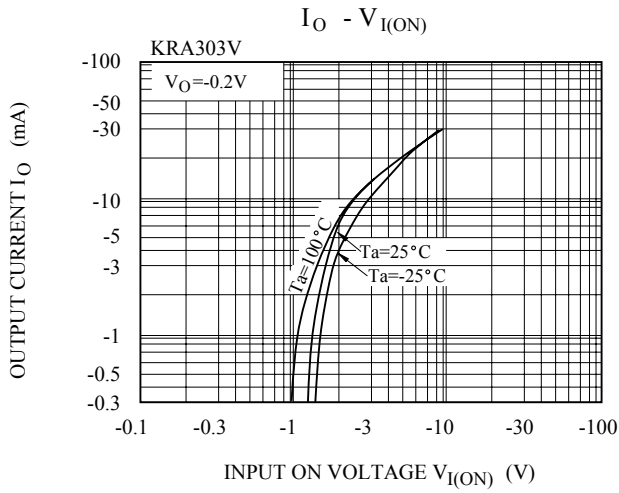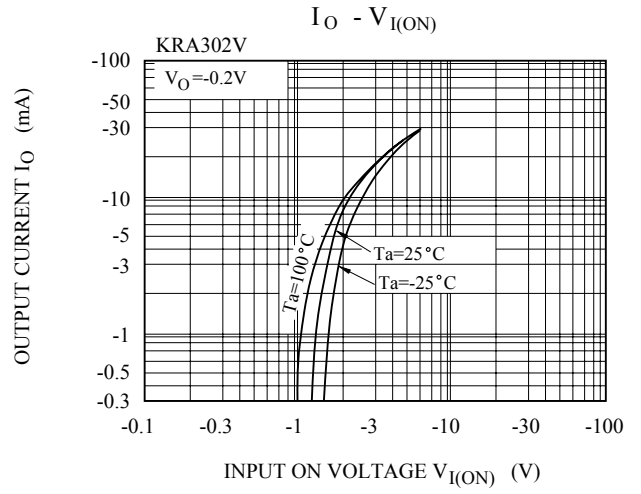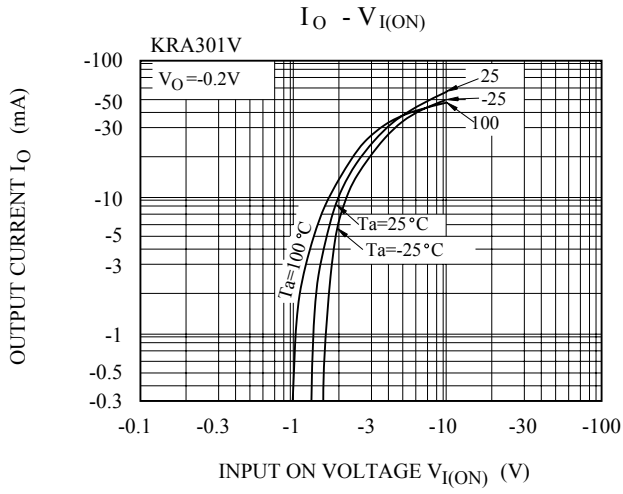

# KRA301V~KRA306V

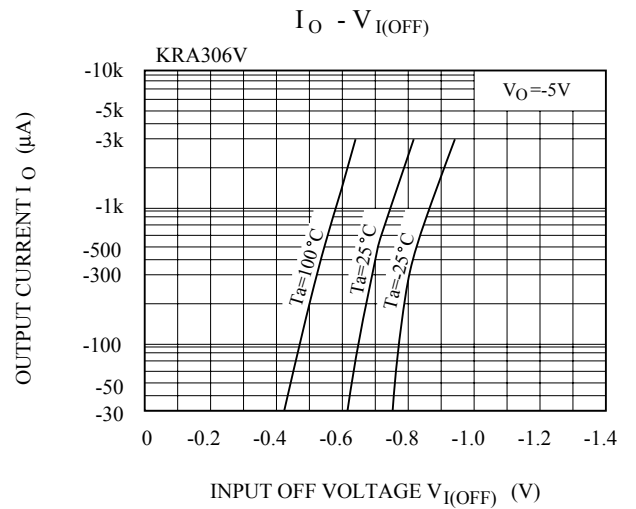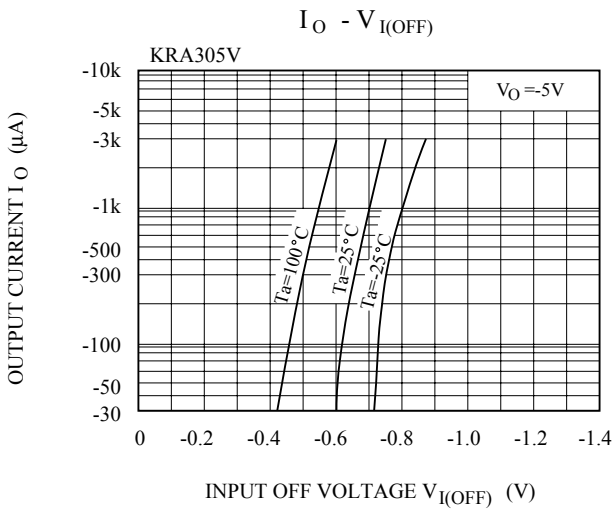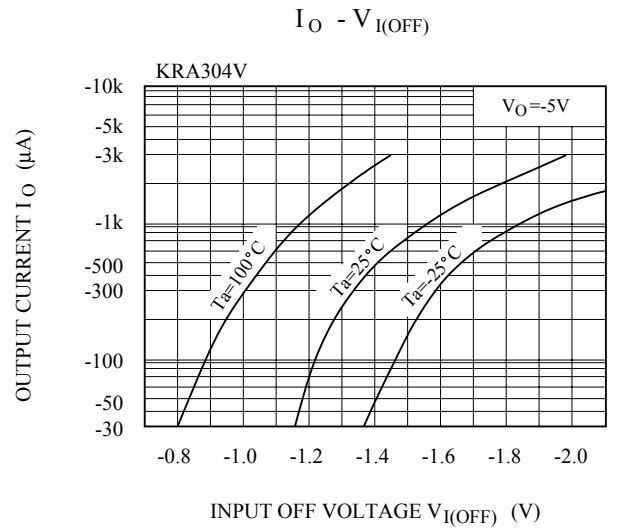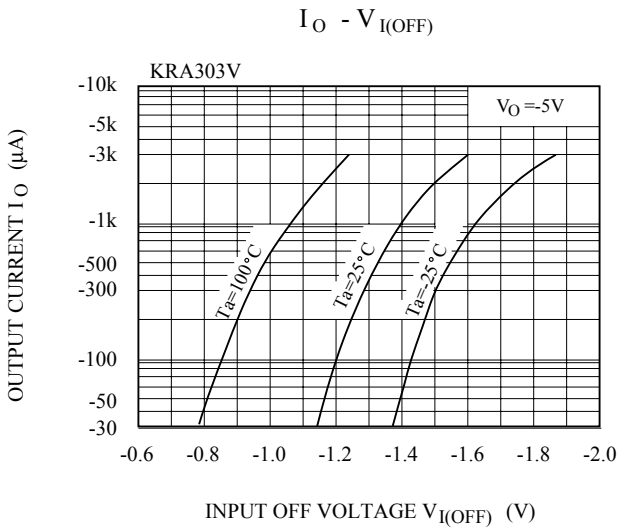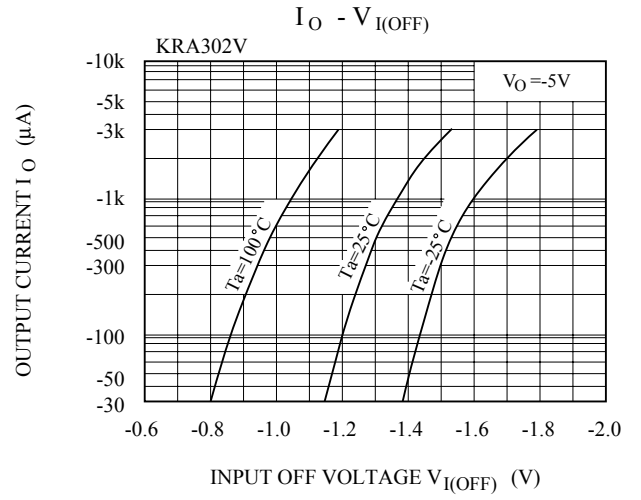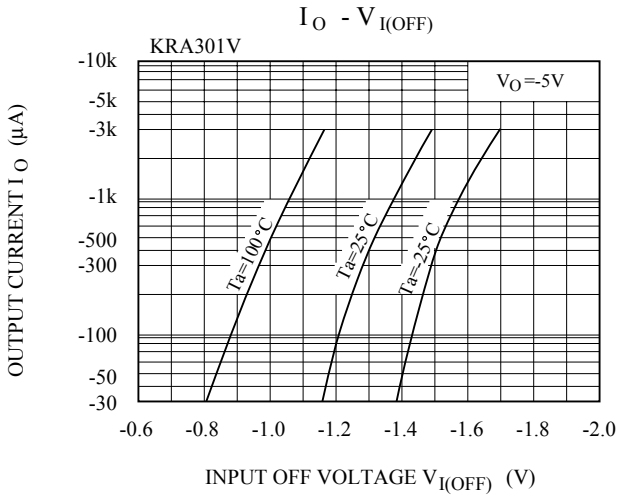

# KRA301V~KRA306V

