


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

FEATURES


- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.

EQUIVALENT CIRCUIT

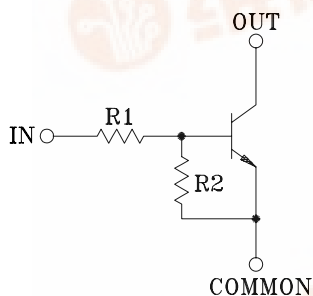

BIAS RESISTOR VALUES

TYPE NO.	R1(k Ω)	R2(k Ω)
KRC101M	4.7	4.7
KRC102M	10	10
KRC103M	22	22
KRC104M	47	47
KRC105M	2.2	47
KRC106M	4.7	47

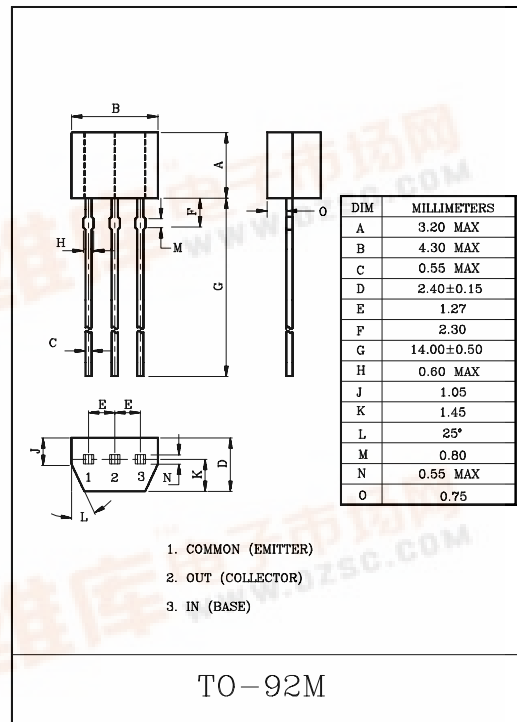

MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRC101M ~106M	V _O	50	V
Input Voltage	KRC101M	V _I	20, -10	V
	KRC102M		30, -10	
	KRC103M		40, -10	
	KRC104M		40, -10	
	KRC105M		12, -5	
	KRC106M		20, -5	
Output Current		I _O	100	mA
Power Dissipation	KRC101M ~106M	P _D	400	mW
Junction Temperature		T _j	150	°C
Storage Temperature Range		T _{stg}	-55~150	°C

KRC101M~KRC106M

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRC101M~106M	$I_{O(OFF)}$	$V_O=50V, V_I=0$	-	-	500	nA
DC Current Gain	KRC101M	G_I	$V_O=5V, I_O=10mA$	30	55	-	
	KRC102M			50	80	-	
	KRC103M			70	120	-	
	KRC104M			80	200	-	
	KRC105M			80	200	-	
	KRC106M			80	200	-	
Output Voltage	KRC101M~106M	$V_{O(ON)}$	$I_O=10mA, I_I=0.5mA$	-	0.1	0.3	V
Input Voltage (ON)	KRC101M	$V_{I(ON)}$	$V_O=0.2V, I_O=5mA$	-	1.5	2.0	V
	KRC102M			-	1.8	2.4	
	KRC103M			-	2.1	3.0	
	KRC104M			-	2.8	5.0	
	KRC105M			-	0.8	1.1	
	KRC106M			-	0.9	1.3	
Input Voltage (OFF)	KRC101M~104M	$V_{I(OFF)}$	$V_O=5V, I_O=0.1mA$	1.0	1.2	-	V
	KRC105M~106M			0.5	0.65	-	
Transition Frequency	KRC101M~106M	$f_T *$	$V_O=10V, I_O=5mA$	-	200	-	MHz
Input Current	KRC101M	I_I	$V_I=5V$	-	-	1.8	mA
	KRC102M			-	-	0.88	
	KRC103M			-	-	0.36	
	KRC104M			-	-	0.18	
	KRC105M			-	-	3.6	
	KRC106M			-	-	1.8	







Note : *Characteristic of Transistor Only

KRC101M ~ KRC106M







ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRC101M	$V_O=5V$ $V_{IN}=5V$ $R_L=1k\Omega$	-	0.03	-	μS
		KRC102M		-	0.05	-	
		KRC103M		-	0.12	-	
		KRC104M		-	0.22	-	
		KRC105M		-	0.01	-	
		KRC106M		-	0.03	-	
	Storage Time	KRC101M		-	2.0	-	
		KRC102M		-	2.0	-	
		KRC103M		-	2.0	-	
		KRC104M		-	2.0	-	
		KRC105M		-	2.0	-	
		KRC106M		-	2.0	-	
	Fall Time	KRC101M		-	0.12	-	
		KRC102M		-	0.36	-	
		KRC103M		-	0.35	-	
		KRC104M		-	0.6	-	
		KRC105M		-	0.1	-	
		KRC106M		-	0.19	-	

KRC101M~KRC106M

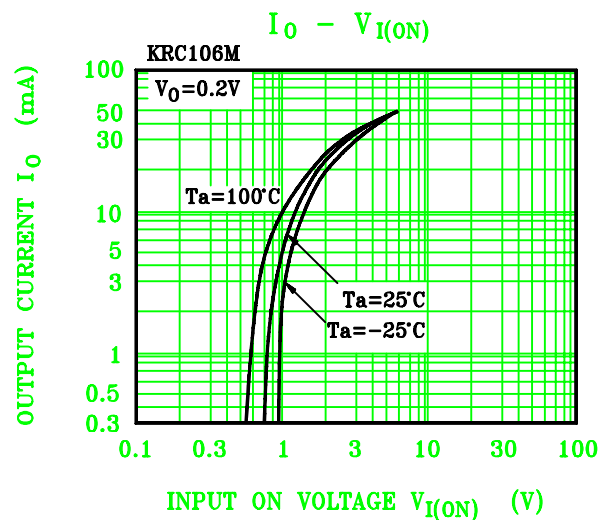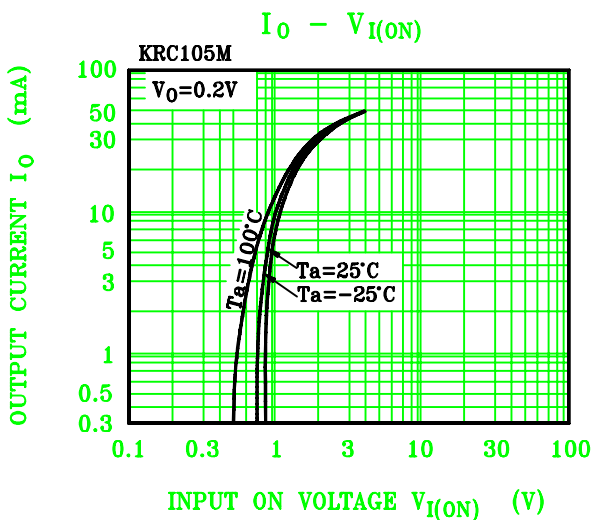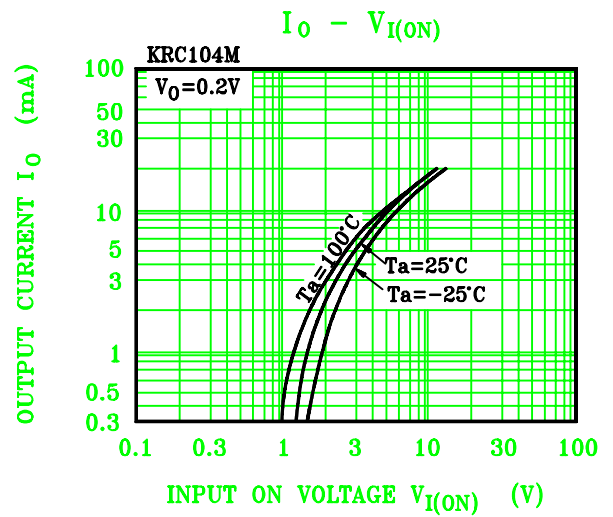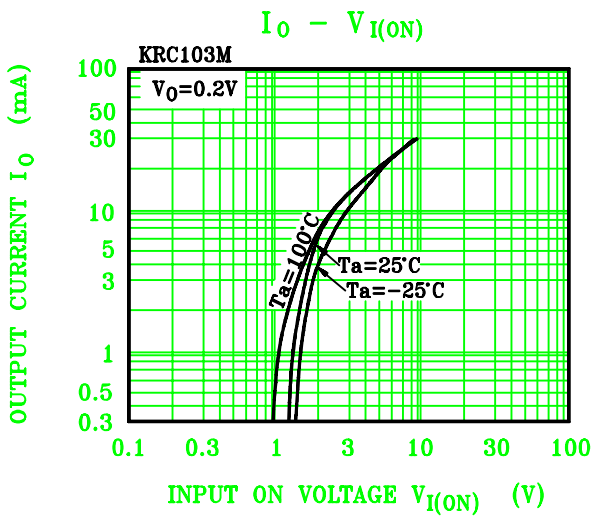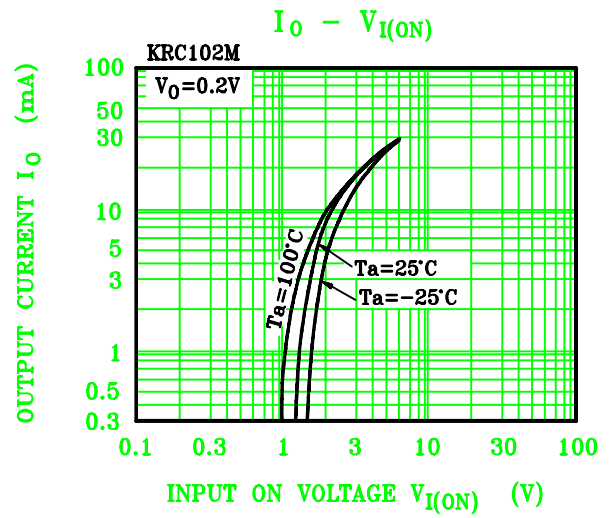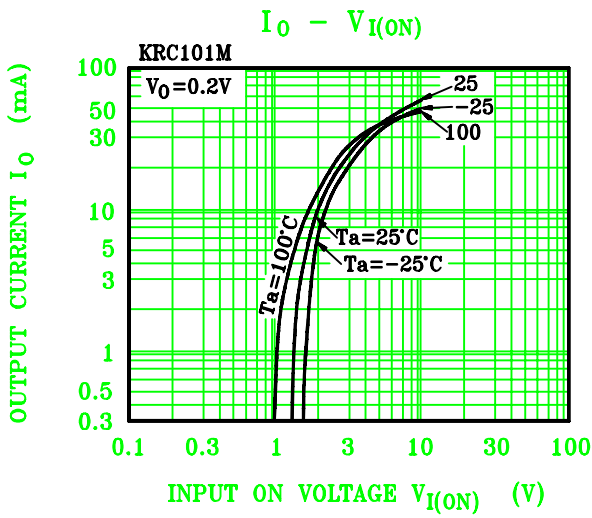

KRC101M ~ KRC106M

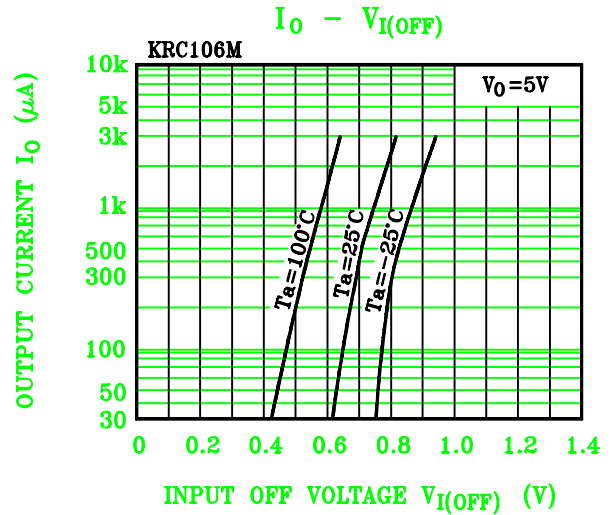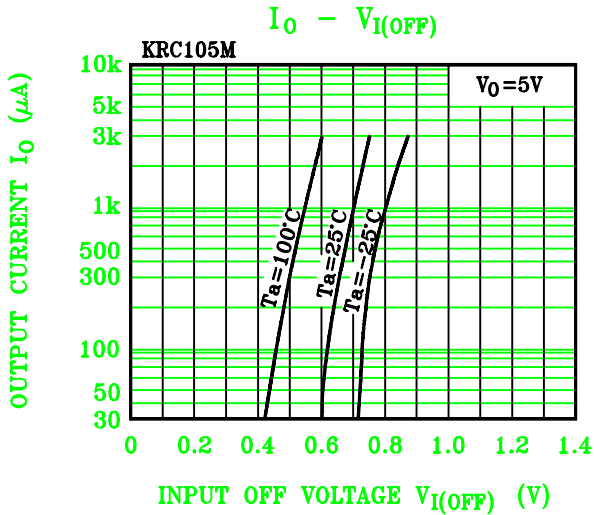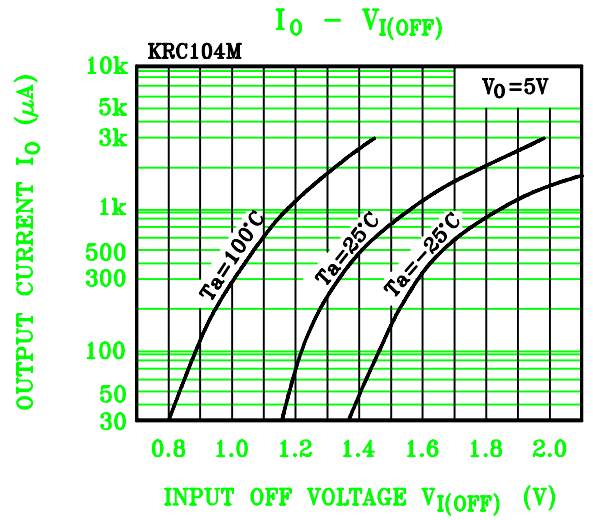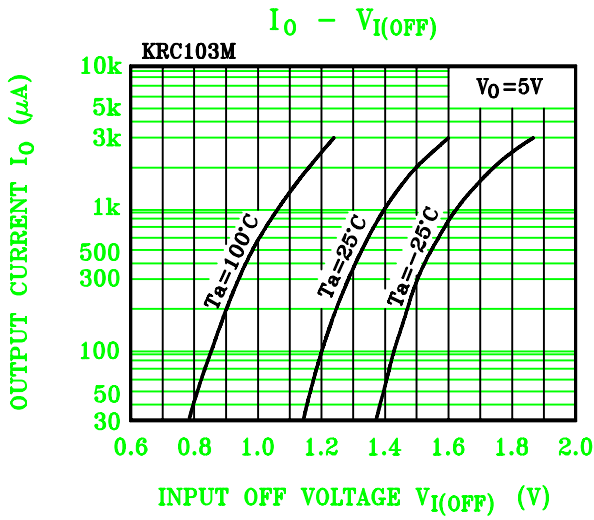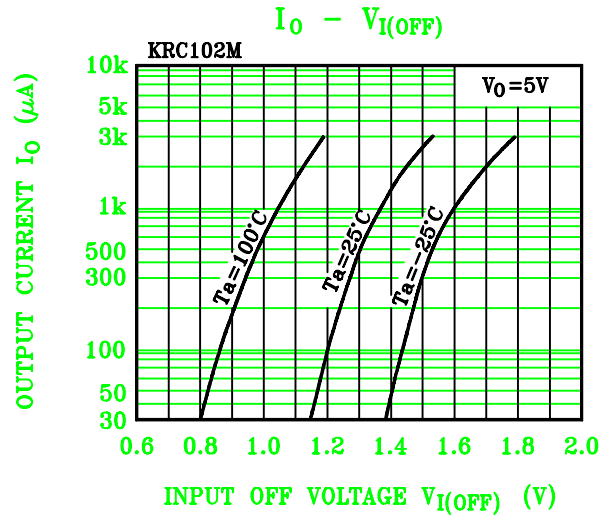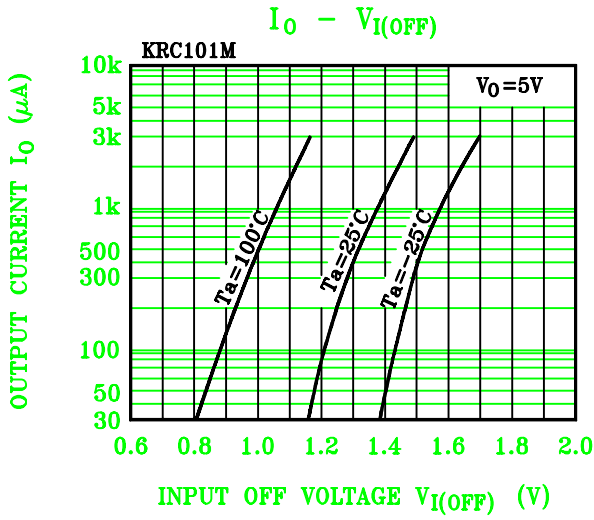

KRC101M ~ KRC106M

