


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

FEATURES


- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- High Packing Density.

EQUIVALENT CIRCUIT




BIAS RESISTOR VALUES

TYPE NO.	R1(kΩ)	R2(kΩ)
KRC651E	4.7	4.7
KRC652E	10	10
KRC653E	22	22
KRC654E	47	47
KRC655E	2.2	47
KRC656E	4.7	47

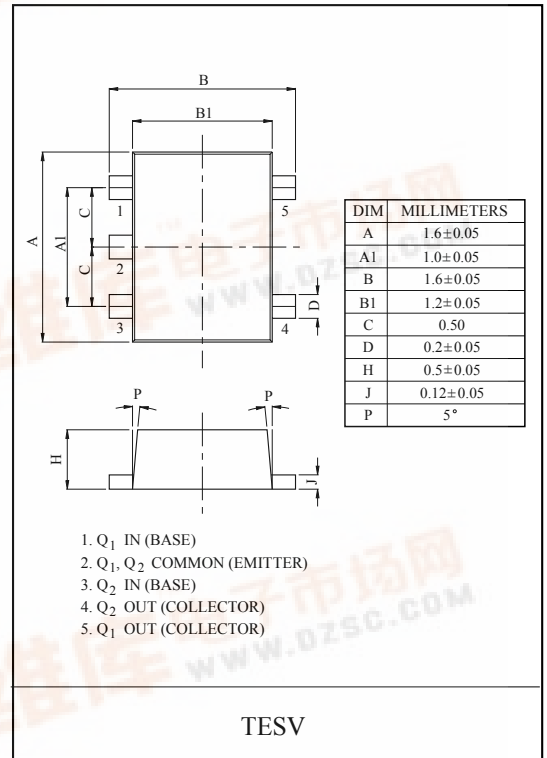

EQUIVALENT CIRCUIT (TOP VIEW)



MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRC651E~656E	V_O	50	V
Input Voltage	KRC651E	V_I	20, -10	V
	KRC652E		30, -10	
	KRC653E		40, -10	
	KRC654E		40, -10	
	KRC655E		12, -5	
	KRC656E		20, -5	
Output Current	KRC651E~656E	I_O	100	mA
Power Dissipation		P_D^*	200	mW
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-55~150	°C


* Total Rating.

MARK SPEC

TYPE	KRC651E	KRC652E	KRC653E	KRC654E	KRC655E	KRC656E
MARK	NA	NB	NC	ND	NE	NF

Marking

Type Name



KRC651E~KRC656E

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRC651E ~ 656E	$I_{O(OFF)}$	$V_O=50V, V_I=0$	-	-	500	nA
DC Current Gain	KRC651E	G_I	$V_O=5V, I_O=10mA$	30	55	-	
	KRC652E			50	80	-	
	KRC653E			70	120	-	
	KRC654E			80	200	-	
	KRC655E			80	200	-	
	KRC656E			80	200	-	
Output Voltage	KRC651E ~ 656E	$V_{O(ON)}$	$I_O=10mA, I_I=0.5mA$	-	0.1	0.3	V
Input Voltage (ON)	KRC651E	$V_{I(ON)}$	$V_O=0.2V, I_O=5mA$	-	1.5	2.0	V
	KRC652E			-	1.8	2.4	
	KRC653E			-	2.1	3.0	
	KRC654E			-	2.8	5.0	
	KRC655E			-	0.8	1.1	
	KRC656E			-	0.9	1.3	
Input Voltage (OFF)	KRC651E ~ 654E	$V_{I(OFF)}$	$V_O=5V, I_O=0.1mA$	1.0	1.2	-	V
	KRC655E ~ 656E			0.5	0.65	-	
Transition Frequency	KRC651E ~ 656E	f_T^*	$V_O=10V, I_O=5mA$	-	200	-	MHz
Input Current	KRC651E	I_I	$V_I=5V$	-	-	1.8	mA
	KRC652E			-	-	0.88	
	KRC653E			-	-	0.36	
	KRC654E			-	-	0.18	
	KRC655E			-	-	3.6	
	KRC656E			-	-	1.8	







Note : * Characteristic of Transistor Only.

KRC651E~KRC656E







ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRC651E	V _O =5V V _{IN} =5V R _L =1kΩ	-	0.03	-	μS
		KRC652E		-	0.05	-	
		KRC653E		-	0.12	-	
		KRC654E		-	0.22	-	
		KRC655E		-	0.01	-	
		KRC656E		-	0.03	-	
	Storage Time	KRC651E		-	2.0	-	
		KRC652E		-	2.0	-	
		KRC653E		-	2.0	-	
		KRC654E		-	2.0	-	
		KRC655E		-	2.0	-	
		KRC656E		-	2.0	-	
	Fall Time	KRC651E		-	0.12	-	
		KRC652E		-	0.36	-	
		KRC653E		-	0.35	-	
		KRC654E		-	0.6	-	
		KRC655E		-	0.1	-	
		KRC656E		-	0.19	-	

KRC651E~KRC656E

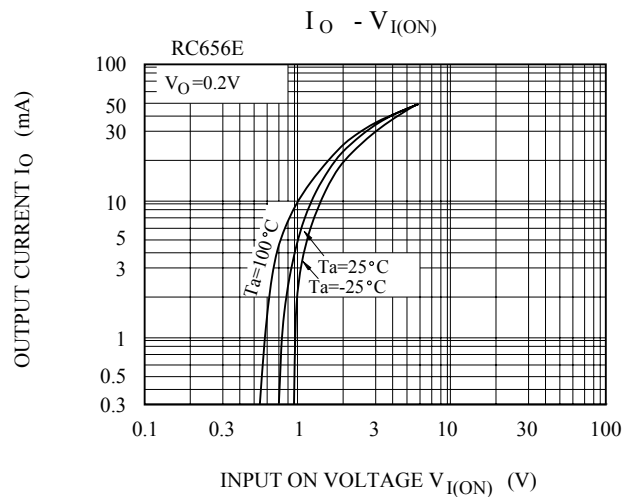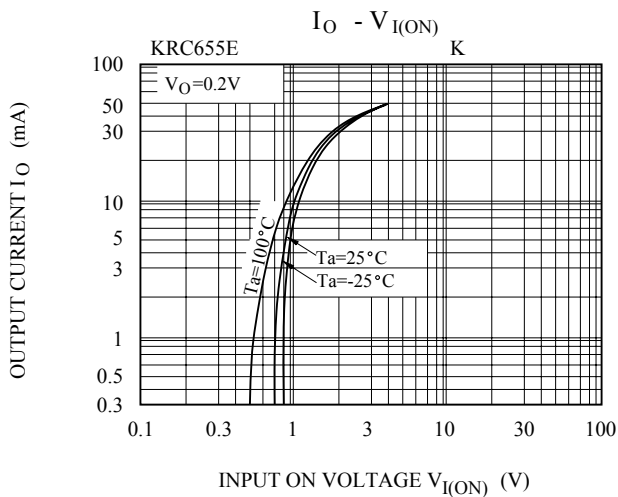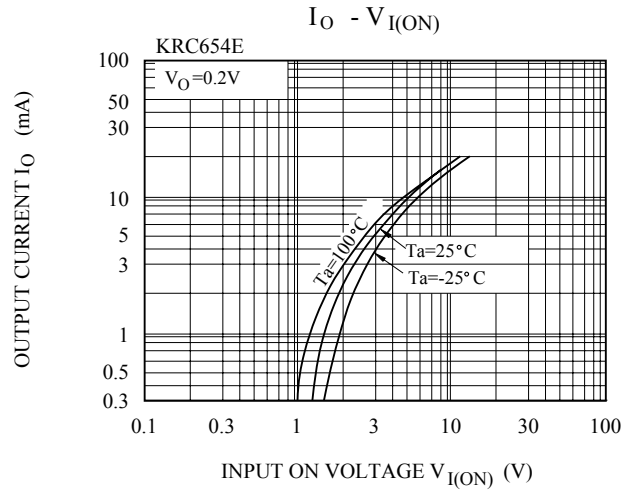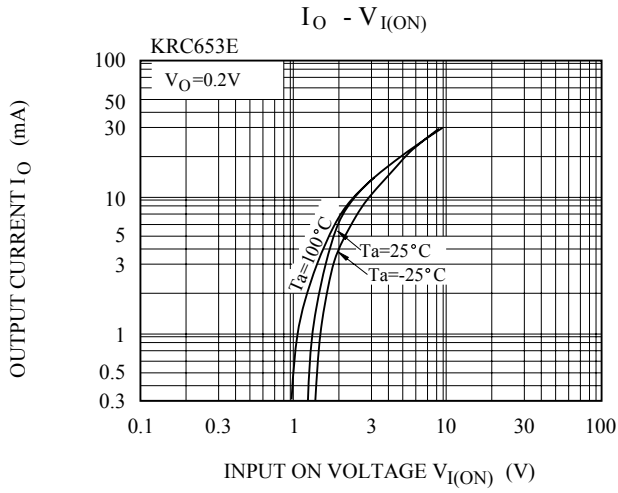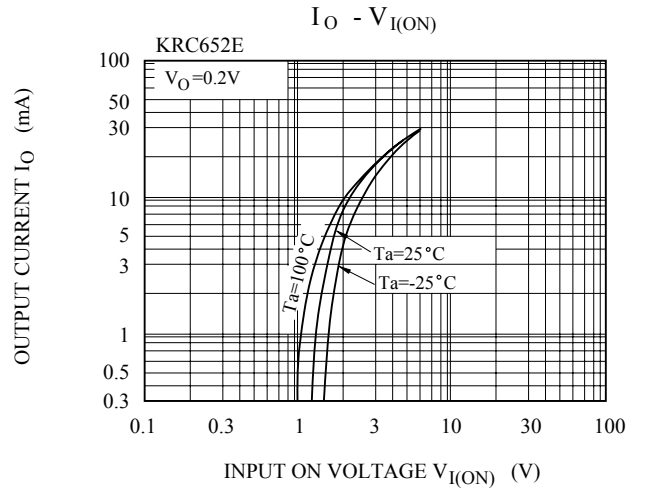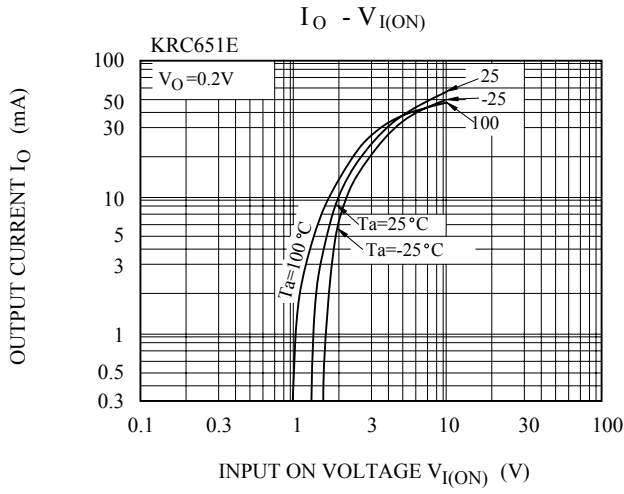

KRC651E~KRC656E

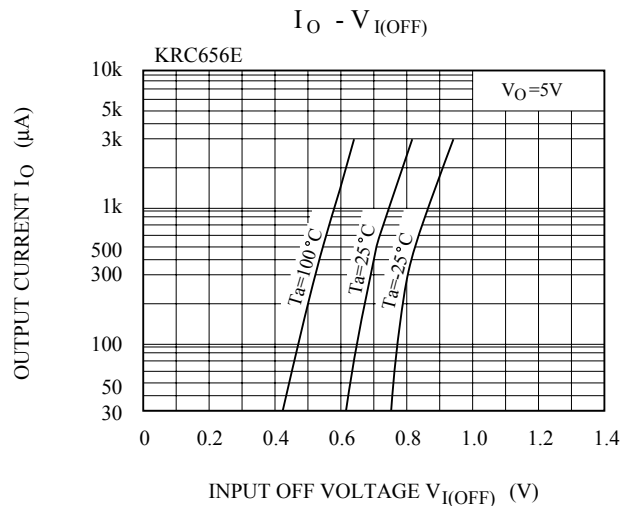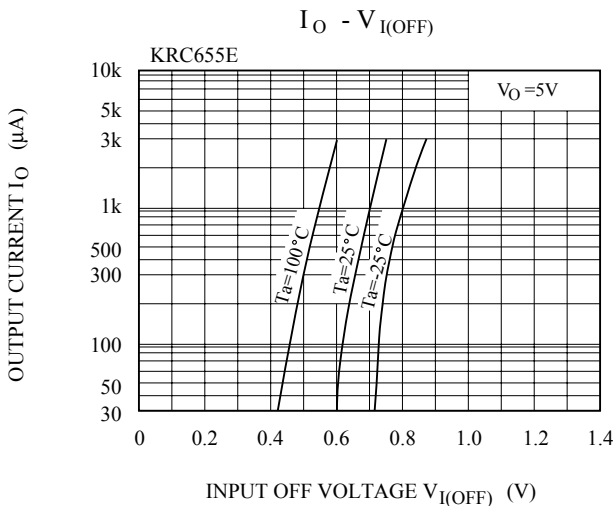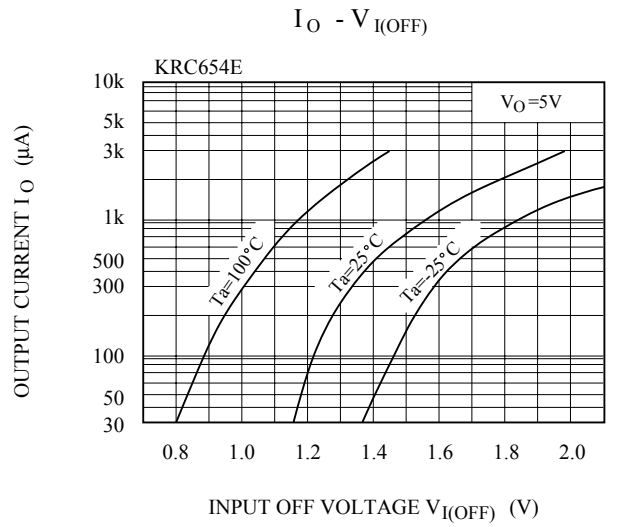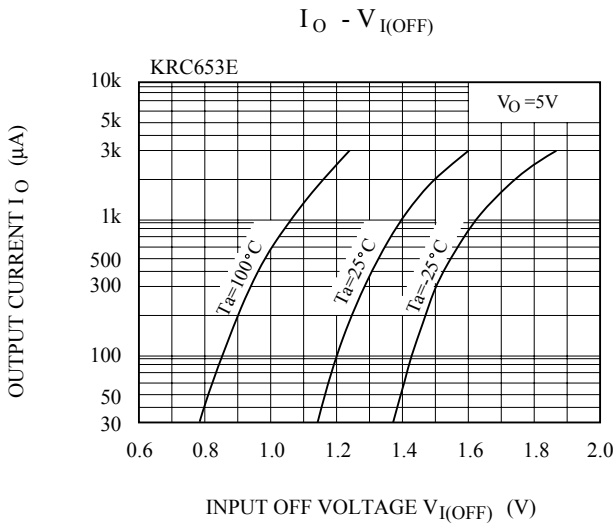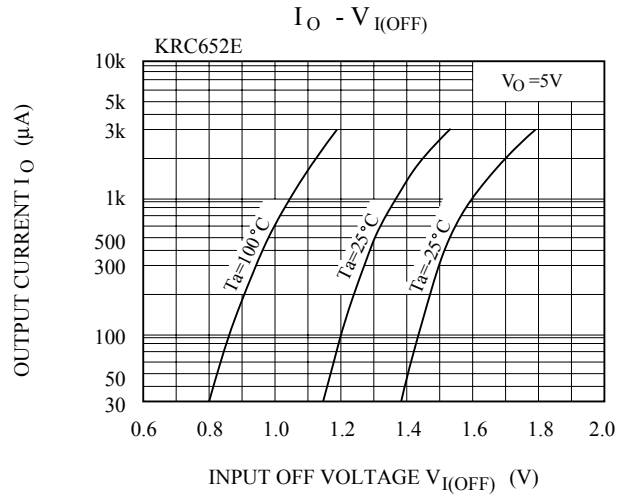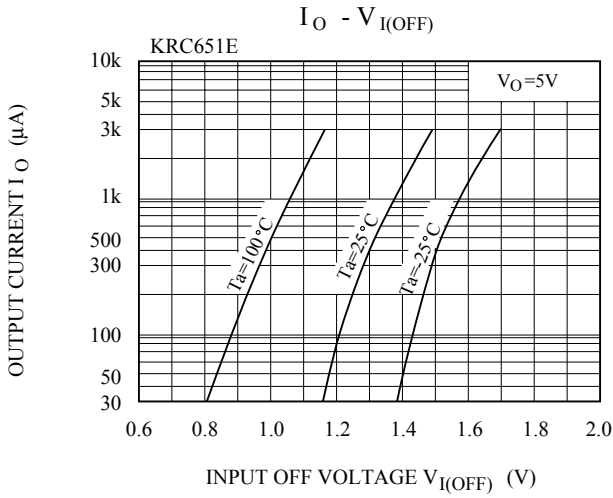

KRC651E~KRC656E

