



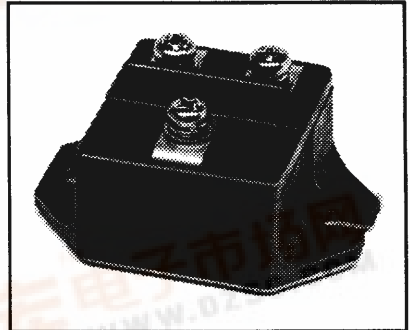

## KS524503

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

### Single Darlington Transistor Module 30 Amperes/600 Volts

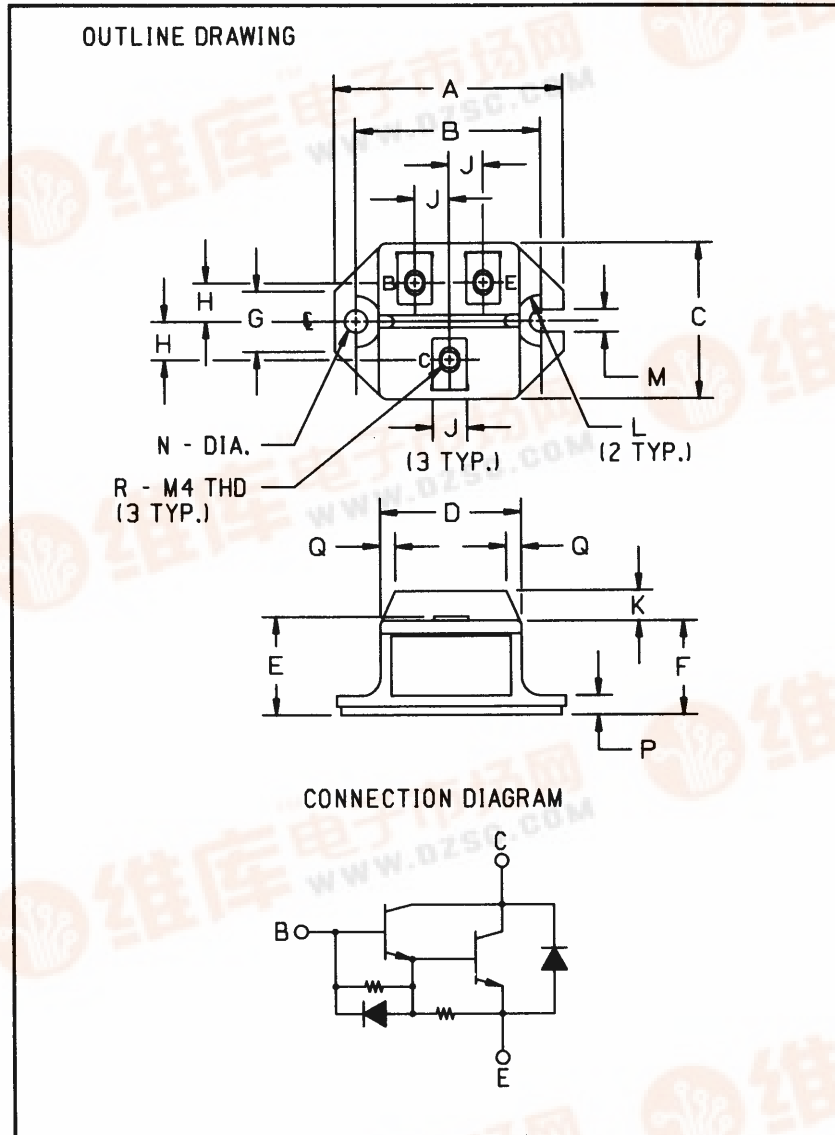

#### Description:

The Powerex Single Darlington Transistor Modules are high power devices designed for use in switching applications. The modules are isolated, consisting of one Darlington Transistor with a reverse parallel connected high-speed diode and base-to-emitter speed-up diode.

#### Features:

- Isolated Mounting
- Planar Chips
- Discrete Fast Recovery Feedback Diode
- High Gain ( $h_{FE}$ )
- Base-Emitter Speed-up Diode

#### Applications:

- Inverters
- DC Motor Control
- Switching Power Supplies
- AC Motor Control

#### Ordering Information:

Example: Select the complete eight digit module part number you desire from the table - i.e. KS524503 is a 450  $V_{CEO(sus)}$  (600  $V_{CEV}$ ), 30 Ampere Single Darlington Module.

Outline Drawing

Dimensions	Inches	Millimeters
A	2.106	53.5
B	1.705 ± 0.008	43.3 ± 0.02
C	1.437	36.5
D	1.299	33
E	0.925	23.5
F	0.866	22
G	0.551	14
H	0.354	9

Dimensions	Inches	Millimeters
J	0.315	8
K	0.276	7
L	0.236 Rad.	6 Rad.
M	0.209	5.3
N	0.209 Dia.	5.3 Dia.
P	0.177	4.5
Q	0.138	3.5
R	M4 Metric	M4

Type	$V_{CEO(sus)}$ Volts (X 10)	Current Rating Amperes (x 10)
KS52	45	03





Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

**KS524503**  
**Single Darlingon Transistor Module**  
 30 Amperes/600 Volts

**Absolute Maximum Ratings,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Symbol	Units	KS524503
Junction Temperature $T_j$	$^\circ\text{C}$	-40 to 150
Storage Temperature $T_{\text{sig}}$	$^\circ\text{C}$	-40 to 125
Collector-Emitter Sustaining Voltage, $V_{\text{CE}}$	Volts	600
Collector-Base Voltage $V_{\text{CBO}}$	Volts	600
Emitter-Base Voltage $V_{\text{EBO}}$	Volts	7
Continuous Collector Current $I_{\text{C}}$	Amperes	30
Diode Forward Current $I_{\text{FM}}$	Amperes	30
Continuous Base Current $I_{\text{B}}$	Amperes	1.8
Diode Surge Current $I_{\text{FSM}}$	Amperes	300
Power Dissipation $P_t$	Watts	250
Max. Mounting Torque M4 Terminal Screws	in.-lb.	12
Max. Mounting Torque M5 Mounting Screws	in.-lb.	17
Module Weight (Typical)	Grams	90
V Isolation $V_{\text{RMS}}$	Volts	2500

**Electrical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector Cutoff Current $I_{\text{CEV}}$	$V_{\text{CE}} = V_{\text{CEV}}, V_{\text{BE}} = -2\text{V}$	-	-	1	mA
Emitter Cutoff Current $I_{\text{EBO}}$	$V_{\text{EB}} = 7\text{V}$	-	-	200	mA
DC Current Gain $h_{\text{FE}}$	$I_{\text{C}} = 30\text{A}, V_{\text{CE}} = 2\text{V}$	75	-	-	-
	$I_{\text{C}} = 30\text{A}, V_{\text{CE}} = 5\text{V}$	100	-	-	-
Diode Forward Voltage $V_{\text{FM}}$	$I_{\text{FM}} = 30\text{A}$	-	-	1.85	Volts
Collector-Emitter Saturation Voltage $V_{\text{CE(sat)}}$	$I_{\text{C}} = 30\text{A}, I_{\text{B}} = 0.4\text{A}$	-	-	2.0	Volts
Base-emitter Saturation Voltage $V_{\text{BE(sat)}}$	$I_{\text{C}} = 30\text{A}, I_{\text{B}} = 0.4\text{A}$	-	-	2.5	Volts
Resistive Turn-on $t_{\text{on}}$	$V_{\text{CC}} = 300\text{V}$	-	-	1.5	$\mu\text{s}$
Load Storage Time $t_{\text{s}}$	$I_{\text{C}} = 30\text{A}$	-	-	12	$\mu\text{s}$
Switch Times Fall Time $t_{\text{f}}$	$I_{\text{B1}} = -I_{\text{B2}} = 0.6\text{A}$	-	-	3.0	$\mu\text{s}$










**Thermal and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance, Case to Sink $\theta_{\text{CS}}$				0.15	$^\circ\text{C}/\text{W}$



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

**K524503**  
**Single Darlington Transistor Module**  
**30 Amperes/600 Volts**

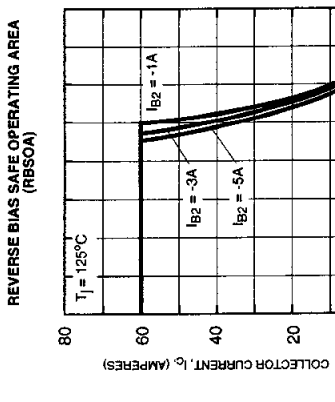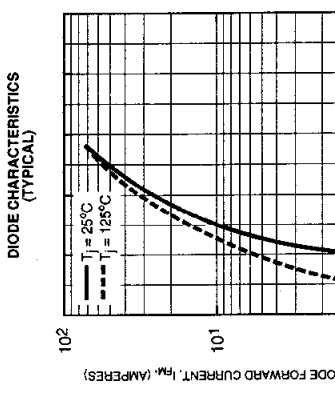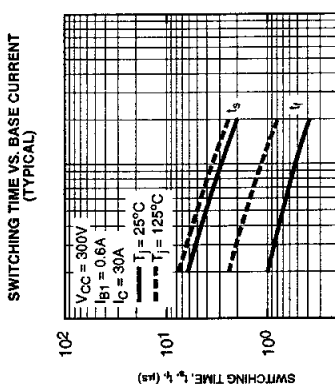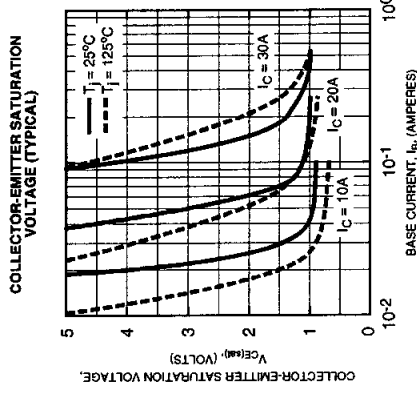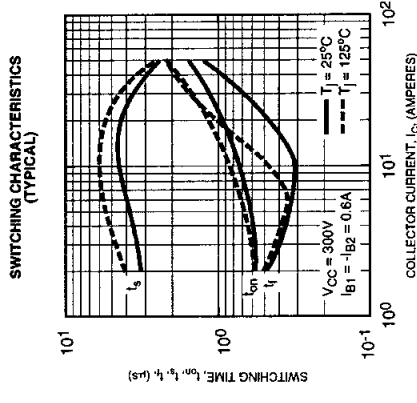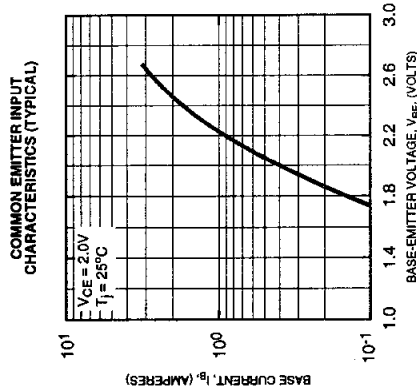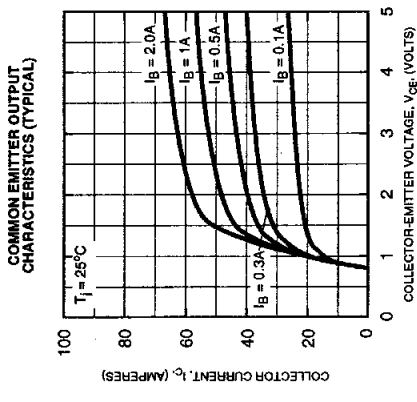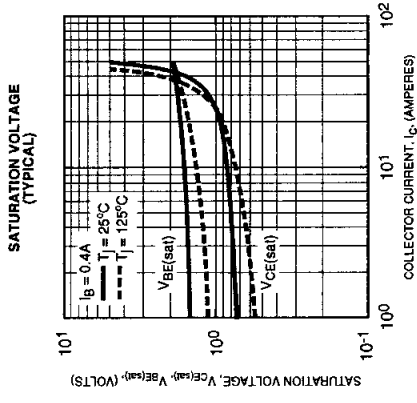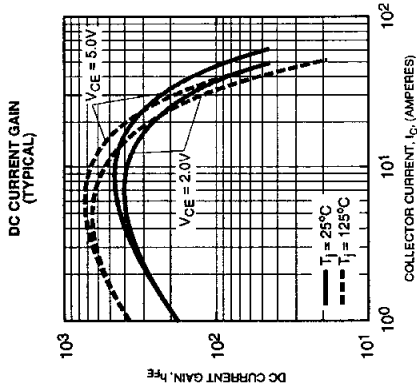



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

**K5524503**  
**Single Darlington Transistor Module**  
**30 Amperes/600 Volts**

