



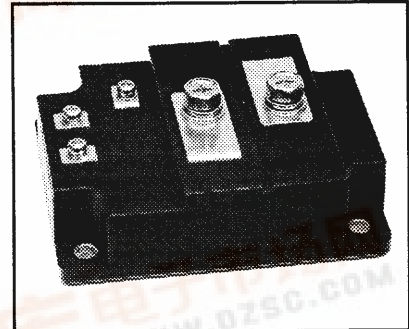

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

## KS621240

### Single Darlington Transistor Module 400 Amperes/1200 Volts

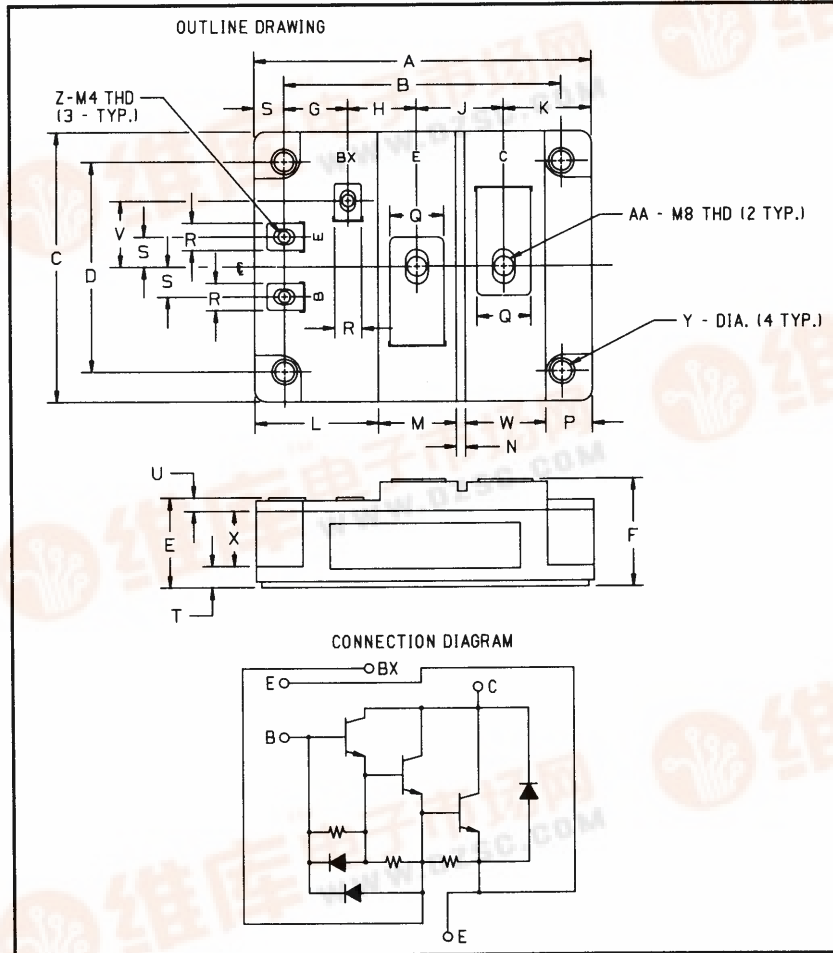

#### Description:

The Powerex Single Darlington Transistor Modules are high power devices designed for use in switching applications. The modules are isolated, consisting of one Darlington Transistor with a reverse parallel connected high-speed diode and base-to-emitter speed-up diode.

#### Features:

- Isolated Mounting
- Planar Chips
- Discrete Fast Recovery Feedback Diode
- High Gain ( $h_{FE}$ )
- Base-Emitter Speed-up Diode

#### Applications:

- Inverters
- DC Motor Control
- Switching Power Supplies
- AC Motor Control

#### Ordering Information:

Example: Select the complete eight digit module part number you desire from the table - i.e. KS621240 is a 1200 Volt, 400 Ampere Single Darlington Module.

#### Outline Drawing

Dimensions	Inches	Millimeters
A	4.449 Max.	113 Max.
B	3.661 ± 0.012	93 ± 0.3
C	3.543 Max.	90 Max.
D	2.756 ± 0.012	70 ± 0.3
E	1.181 Max.	30 Max.
F	1.417 Max.	36 Max.
G	0.846	21.5
H	0.906	23
J	1.142	29
K	1.161	29.5
L	1.634	41.5
M	1.024	26
N	0.118	3

Dimensions	Inches	Millimeters
P	0.610	15.5
Q	0.709	18
R	0.354	9
S	0.394	10
T	0.276	7
U	0.177	4.5
V	0.866	22
W	1.063	27
X	0.728	18.5
Y	0.256 Dia.	6.5 Dia.
Z	M4 Metric	M4
AA	M8 Metric	M8

Type	V <sub>CEO(sus)</sub> Volts (X 100)	Current Rating Amperes (X 10)
KS62	12	40





Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

**KS621240**  
Single Darlington Transistor Module  
400 Amperes/1200 Volts

**Absolute Maximum Ratings,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Ratings	Symbol	KS621240	Units
Junction Temperature	$T_j$	-40 to 150	$^\circ\text{C}$
Storage Temperature	$T_{\text{stg}}$	-40 to 125	$^\circ\text{C}$
Collector-Emitter Sustaining Voltage, $V_{\text{BE}} = -2\text{V}$	$V_{\text{CEV(sus)}}$	1200	Volts
Collector-Base Voltage	$V_{\text{CBO}}$	1200	Volts
Emitter-Base Voltage	$V_{\text{EBO}}$	7	Volts
Collector-Emitter Voltage	$V_{\text{CEV}}$	1200	Volts
Continuous Collector Current	$I_{\text{C}}$	400	Amperes
Diode Forward Current	$I_{\text{FM}}$	400	Amperes
Continuous Base Current	$I_{\text{B}}$	20	Amperes
Diode Surge Current	$I_{\text{FSM}}$	4000	Amperes
Power Dissipation	$P_{\text{T}}$	3120	Watts
Max. Mounting Torque M8 Terminal Screws (E, C)	-	95	in.-lb.
Max. Mounting Torque M4 Terminal Screws (B, Bx, E)	-	12	in.-lb.
Max. Mounting Torque M6 Mounting Screws	-	26	in.-lb.
Modular Weight (Typical)	-	870	Grams
V Isolation	$V_{\text{RMS}}$	2500	Volts

**Electrical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector Cutoff Current	$I_{\text{CEV}}$	$V_{\text{CE}} = 1200\text{V}, V_{\text{BE}} = -2\text{V}$	-	-	8	mA
Emitter Cutoff Current	$I_{\text{EBO}}$	$V_{\text{EB}} = 7\text{V}$	-	-	600	mA
DC Current Gain	$h_{\text{FE}}$	$I_{\text{C}} = 400\text{A}, V_{\text{CE}} = 5\text{V}$	75	-	-	-
Diode Forward Voltage	$V_{\text{FM}}$	$I_{\text{FM}} = 400\text{A}$	-	-	1.8	Volts
Collector-Emitter Saturation Voltage	$V_{\text{CE(sat)}}$	$I_{\text{C}} = 400\text{A}, I_{\text{B}} = 8\text{A}$	-	-	3.0	Volts
Base-Emitter Saturation Voltage	$V_{\text{BE(sat)}}$	$I_{\text{C}} = 400\text{A}, I_{\text{B}} = 8\text{A}$	-	-	3.5	Volts
Resistive Turn-on	$t_{\text{on}}$	$V_{\text{CC}} = 600\text{V}$	-	-	3.0	$\mu\text{s}$
Load Storage Time	$t_{\text{s}}$	$I_{\text{C}} = 400\text{A}$	-	-	16	$\mu\text{s}$
Switch Times Fall Time	$t_{\text{f}}$	$I_{\text{B1}} = -I_{\text{B2}} = 8\text{A}$	-	-	3.0	$\mu\text{s}$










**Thermal and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
-----------------	--------	-----------------	------	------	------	-------



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

**KS621240**  
**Single Darlington Transistor Module**  
 400 Amperes/1200 Volts

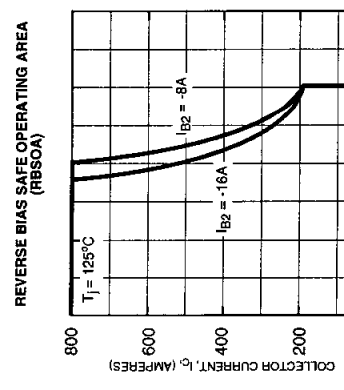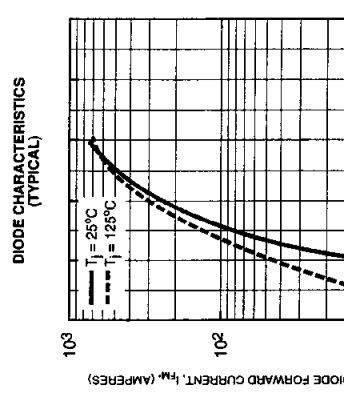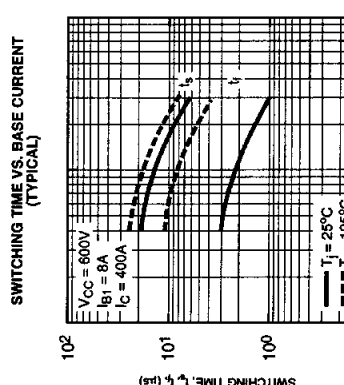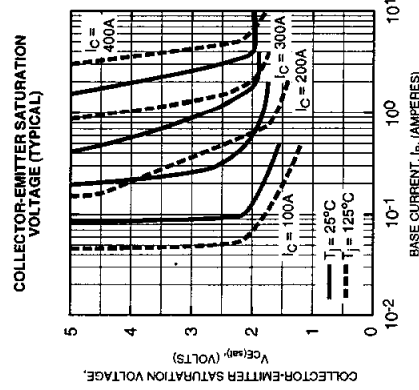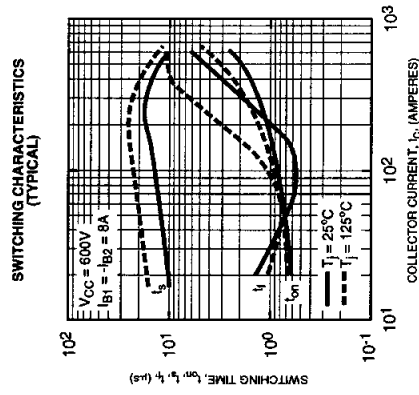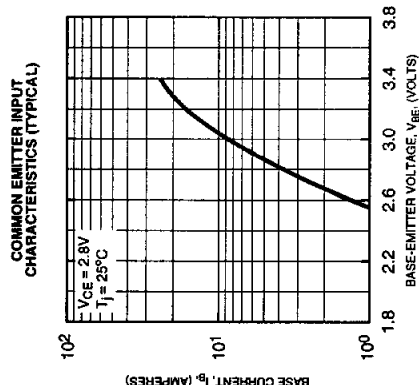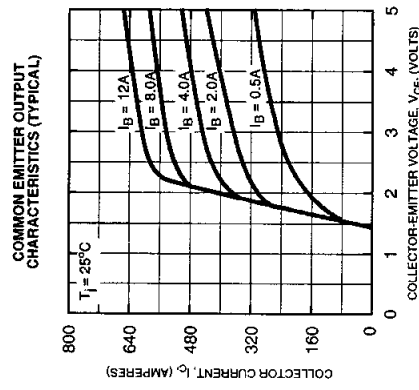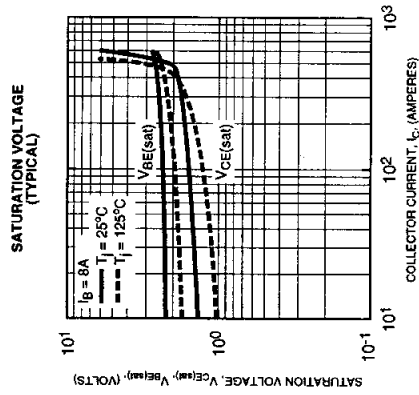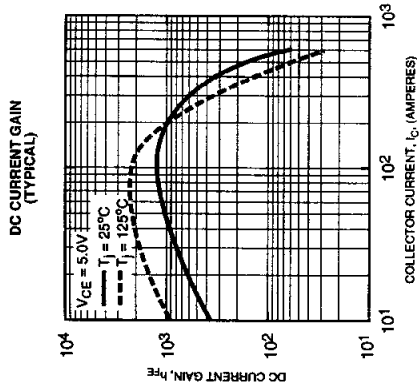



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

**KS621240**  
**Single Darlington Transistor Module**  
 400 Amperes/1200 Volts

