


KSR1106 NPN EPITAXIAL SILICON TRANSISTOR

SWITCHING APPLICATION (Bias Resistor Built In)

- Switching Circuit, Inverter, Interface circuit Driver circuit
- Built in bias Resistor ($R_1=10K\Omega$, $R_2=47K\Omega$)
- Complement to KSR2106

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ C$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CB0}	50	V
Collector-Emitter Voltage	V_{CE0}	50	V
Emitter-Base Voltage	V_{EB0}	10	V
Collector Current	I_C	100	mA
Collector Dissipation	P_C	200	mW
Junction Temperature	T_J	150	$^\circ C$
Storage Temperature	T_{stg}	-55 ~ 150	$^\circ C$

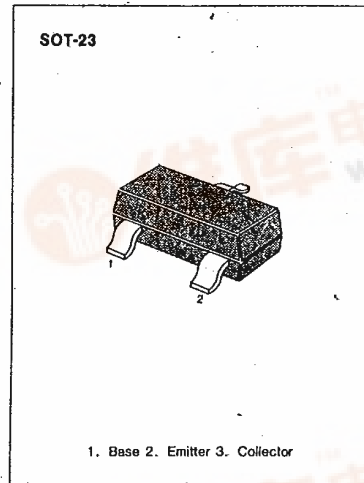


3


ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	BV_{CB0}	$I_C=10\mu A, I_E=0$	50			V
Collector-Emitter Breakdown Voltage	BV_{CE0}	$I_C=100\mu A, I_B=0$	50			V
Collector Cutoff Current	I_{CBO}	$V_{CB}=40V, I_E=0$			0.1	μA
DC Current Gain	h_{FE}	$V_{CE}=5V, I_C=5mA$	68			
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=10mA, I_B=0.5mA$			0.3	V
Output Capacitance	C_{ob}	$V_{CB}=10V, I_E=0$ $f=1MHz$		3.7		pF
Current Gain-Bandwidth Product	f_T	$V_{CE}=10V, I_C=5mA$		250		MHz
Input Off Voltage	$V_{I(off)}$	$V_{CE}=5V, I_C=100\mu A$	0.3			V
Input On Voltage	$V_{I(on)}$	$V_{CE}=0.3V, I_C=1mA$			1.4	V
Input Resistor	R_1		7	10	13	K Ω
Resistor Ratio	R_1/R_2		0.19	0.21	0.24	

Equivalent Circuit

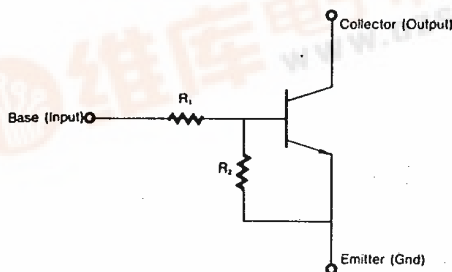

Marking



KSR1106

NPN EPITAXIAL SILICON TRANSISTOR

