

VARIABLE CAPACITANCE DIODE

FEATURES

- Excellent Linearity (CV Curve)
- Large Capacitance Ratio (A = 3.70 minimum) with Very Low Series Resistance
- Two Diodes in a Miniature Package (SOT23-3)
- Very Small Capacitance Deviation at Tape/Reel

APPLICATIONS

- FM Radio
- Voltage Controlled Oscillator

DESCRIPTION

The KV1430 variable capacitance diode was specially made to be used as tuning elements in car radios, radio cassettes, stereos, and other consumer radios. The KV1430 is suitable for wide band tuning from 76 to 108 MHz.

If the KV1430 is used only for FM reception, it is possible to operate it at 4.5 V so it is very useful in lowering the power demands of the set.


The KV1430 is available in a miniature SOT23-3 package.

CLASSIFICATION


(Unit: pF)

C		RANK			
		2	3	4	5
C ₂	MIN	69.14	71.09	73.09	75.15
	MAX	71.23	73.24	75.31	77.43

ORDERING INFORMATION

KV1430 
 Tape/Reel Code

TAPE/REEL CODE
 TL: Tape Left

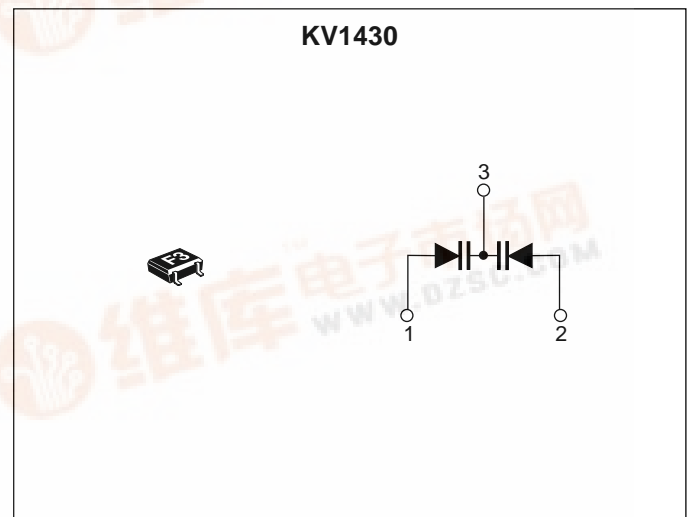

KV1430

ABSOLUTE MAXIMUM RATINGS

Reverse Voltage	18 V	Storage Temperature Range	-55 to +150 °C
Forward Current	50 mA	Operating Temperature Range	-55 to +85 °C
Power Dissipation	100 mW	Lead Soldering Temperature (10 s)	235 °C

ELECTRICAL CHARACTERISTICS

Test conditions: $T_A = 25\text{ °C}$

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
V_{REV}	Reverse Voltage	$I_{REV} = 10\ \mu\text{A}$	16			V
I_{REV}	Reverse Current	$V_{REV} = 10.0\ \text{V}$			100	nA
C_2	Diode Capacitance 2	$V_{REV} = 2.0\ \text{V}, f = 1\ \text{MHz}$	69.14		77.43	pF
C_4	Diode Capacitance 4	$V_{REV} = 4.0\ \text{V}, f = 1\ \text{MHz}$	43.09		56.24	pF
C_6	Diode Capacitance 6	$V_{REV} = 6.0\ \text{V}, f = 1\ \text{MHz}$	25.05		34.57	pF
C_9	Diode Capacitance 9	$V_{REV} = 9.0\ \text{V}, f = 1\ \text{MHz}$	15.44		20.10	pF
R_S	Series Resistance	$V_{REV} = 2.0\ \text{V}, f = 70\ \text{MHz}$			0.5	Ω
A	Capacitance Ratio	C_2 / C_9	3.70		5.00	







Note 1: Diode Capacitance measured with HP 4279A or equivalent instruments (at OSC level 20 mVrms, ± 5 mVrms).

Note 2: Series Resistance measured with HP 4191A or equivalent instruments.

Note 3: The tolerance of two adjacent parts on a reel is within 3% at C2, C4, C6, and C9.

Note 4: The value of capacitance is the average of 2 back to back type diodes.


TYPICAL PERFORMANCE CHARACTERISTICS

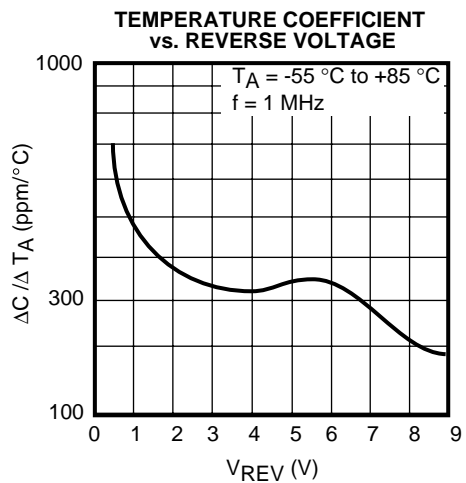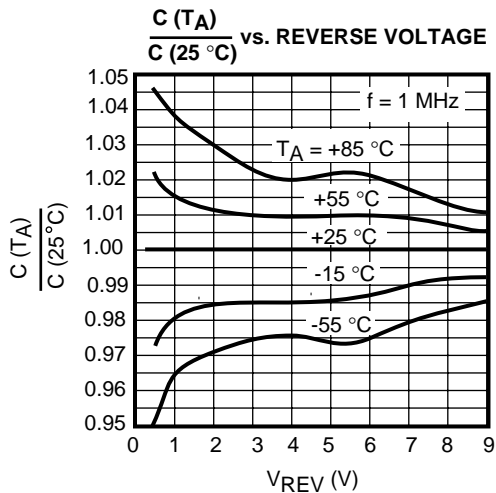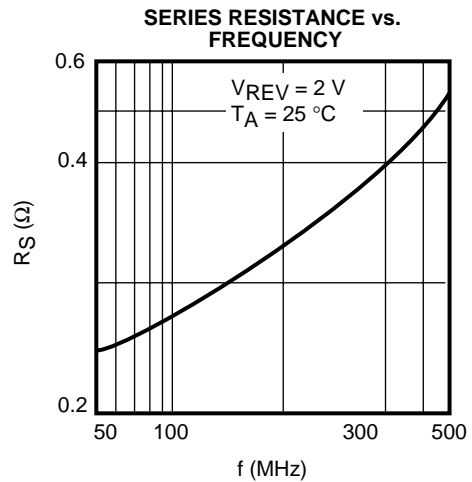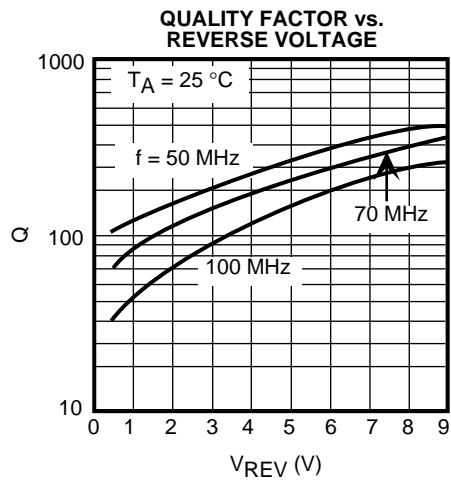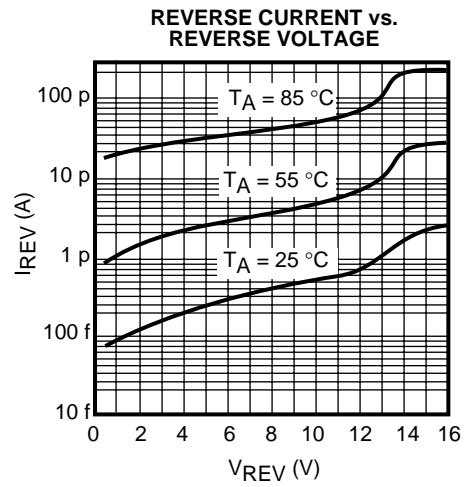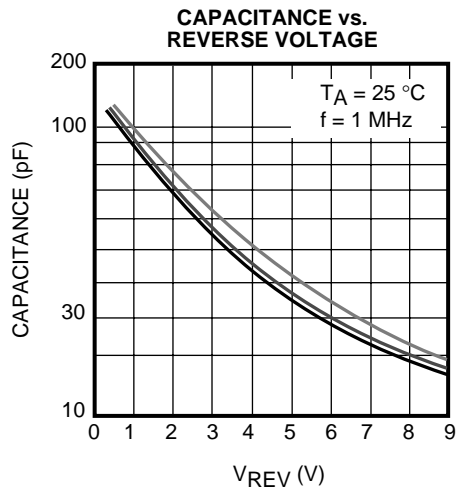

KV1430

PACKAGE OUTLINE

SOT23-3

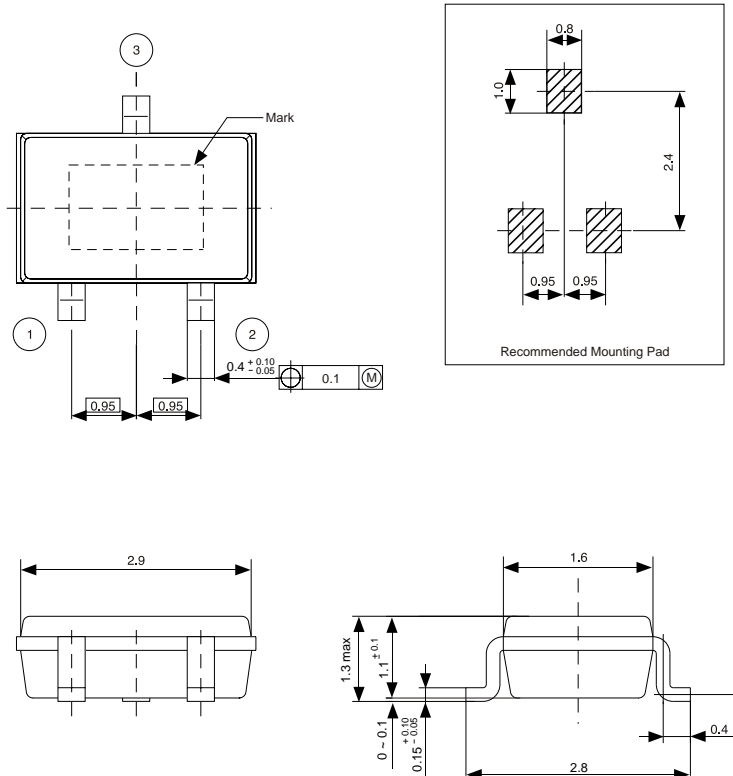

Dimensions are shown in millimeters
Tolerance: x.x = ± 0.2 mm (unless otherwise specified)

Marking Information

Product Code F3



Toko America, Inc. Headquarters
1250 Feehanville Drive, Mount Prospect, Illinois 60056
Tel: (847) 297-0070 Fax: (847) 699-7864

TOKO AMERICA REGIONAL OFFICES

Midwest Regional Office
Toko America, Inc.
1250 Feehanville Drive
Mount Prospect, IL 60056
Tel: (847) 297-0070
Fax: (847) 699-7864

Western Regional Office
Toko America, Inc.
2480 North First Street, Suite 260
San Jose, CA 95131
Tel: (408) 432-8281
Fax: (408) 943-9790

Eastern Regional Office
Toko America, Inc.
107 Mill Plain Road
Danbury, CT 06811
Tel: (203) 748-6871
Fax: (203) 797-1223

Semiconductor Technical Support
Toko Design Center
4755 Forge Road
Colorado Springs, CO 80907
Tel: (719) 528-2200
Fax: (719) 528-2375

Visit our Internet site at <http://www.tokoam.com>

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.