



KV1555NT

VARIABLE CAPACITANCE DIODE

FEATURES

- Very Low Operating Voltage (1 to 4.5 V)
- Excellent Linearity (CV Curve)
- Large Capacitance Ratio ($A = 16.5$ minimum)
- Two Diodes in a 3 Lead Through-Hole Discrete Package (TO92-3)
- Very Small Capacitance Deviation at Tape/Reel

DESCRIPTION

The KV1555NT variable capacitance diode was specially developed for use as tuning elements in car radios, radio cassettes, and other consumer radios. Single package construction includes an antenna and oscillating tuning element.

The KV1555NT is available in a TO92-3 package.

APPLICATIONS

- AM Radio
- Voltage Controlled Oscillator

CLASSIFICATION


(Unit: pF)

C \ RANK		1	2	3	4
C ₁	MIN	400.00	413.00	426.00	439.00
	MAX	419.00	432.00	445.00	458.00

ORDERING INFORMATION

KV1555NT

Note: The KV1555NT is supplied on folded paper tape (25 pieces per fold), 1500 pcs per box.

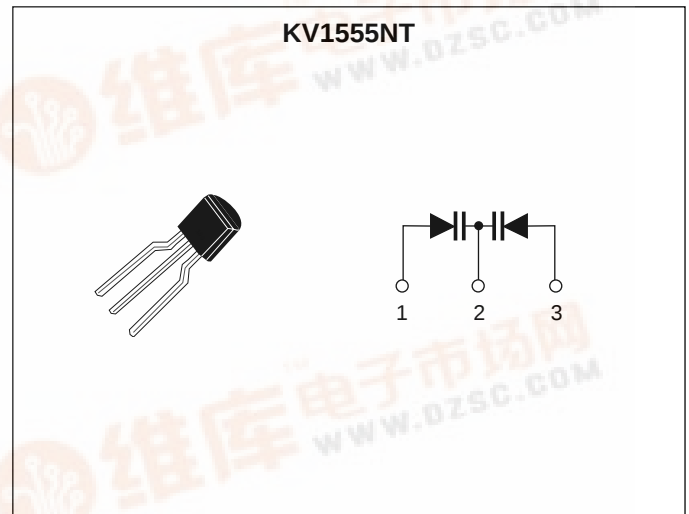

KV1555NT

ABSOLUTE MAXIMUM RATINGS

Reverse Voltage 30 V Storage Temperature Range -55 to +150 °C
 Forward Current 50 mA Operating Temperature Range -55 to +85 °C
 Power Dissipation 100 mW Lead Soldering Temperature (10 s) 235 °C

ELECTRICAL CHARACTERISTICS

Test conditions: $T_A = 25\text{ °C}$

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
V_{REV}	Reverse Voltage	$I_{REV} = 10\text{ }\mu\text{A}$	20			V
I_{REV}	Reverse Current	$V_{REV} = 15.0\text{ V}$			50	nA
C_1	Diode Capacitance 1	$V_{REV} = 1.0\text{ V}$, $f = 1\text{ MHz}$	400.00	429.00	458.00	pF
$C_{4.5}$	Diode Capacitance 4.5	$V_{REV} = 4.5\text{ V}$, $f = 1\text{ MHz}$	21.00	23.50	26.00	pF
$\Delta C1.0$	Capacitance Tolerance (Note 2)	$V_{REV} = 1.0\text{ V}$, $f = 1\text{ MHz}$			2.0	%
$\Delta C3.0$		$V_{REV} = 3.0\text{ V}$, $f = 1\text{ MHz}$			3.0	%
$\Delta C4.5$		$V_{REV} = 4.5\text{ V}$, $f = 1\text{ MHz}$			3.0	%
Q	Quality Factor	$V_{REV} = 1.0\text{ V}$, $f = 1\text{ MHz}$	200			
A	Capacitance Ratio	$C_1 / C_{4.5}$	16.50	18.30	20.00	





Note 1: Diode Capacitance measured with HP 4279A or equivalent instruments (at OSC level 20 mVrms, $\pm 5\text{ mVrms}$).

Note 2: $\Delta C = \frac{C_{\max}(D_1, D_2) - C_{\min}(D_1, D_2)}{C_{\min}(D_1, D_2)} \times 100$

* D_1, D_2 : Please refer to the Pin Layout shown below.


	Symbol	Anode Pin	Cathode Pin
Diode 1	D_1	①	②
Diode 2	D_2	③	②

TYPICAL PERFORMANCE CHARACTERISTICS

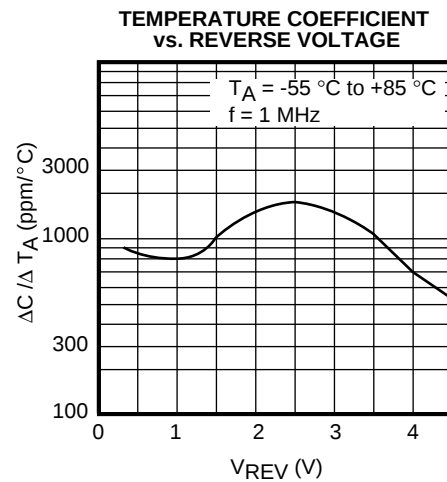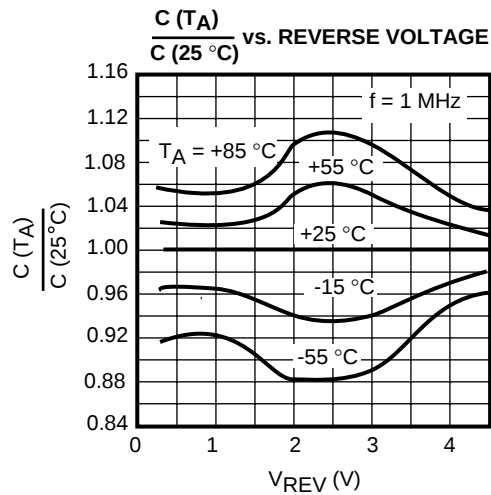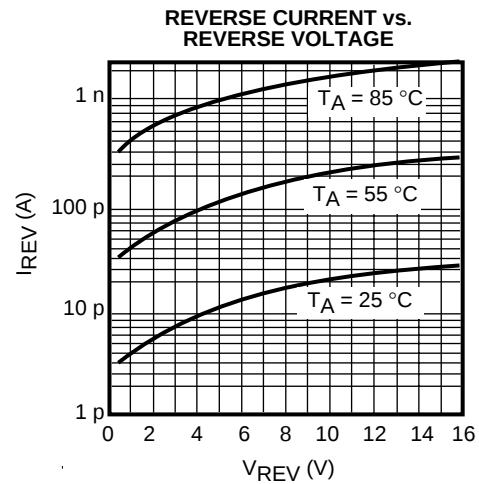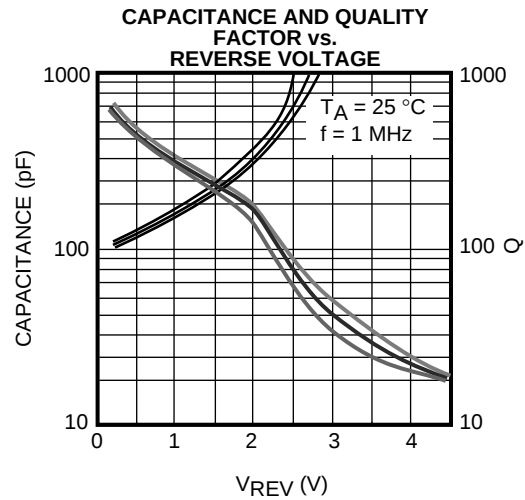

KV1555NT

PACKAGE OUTLINE

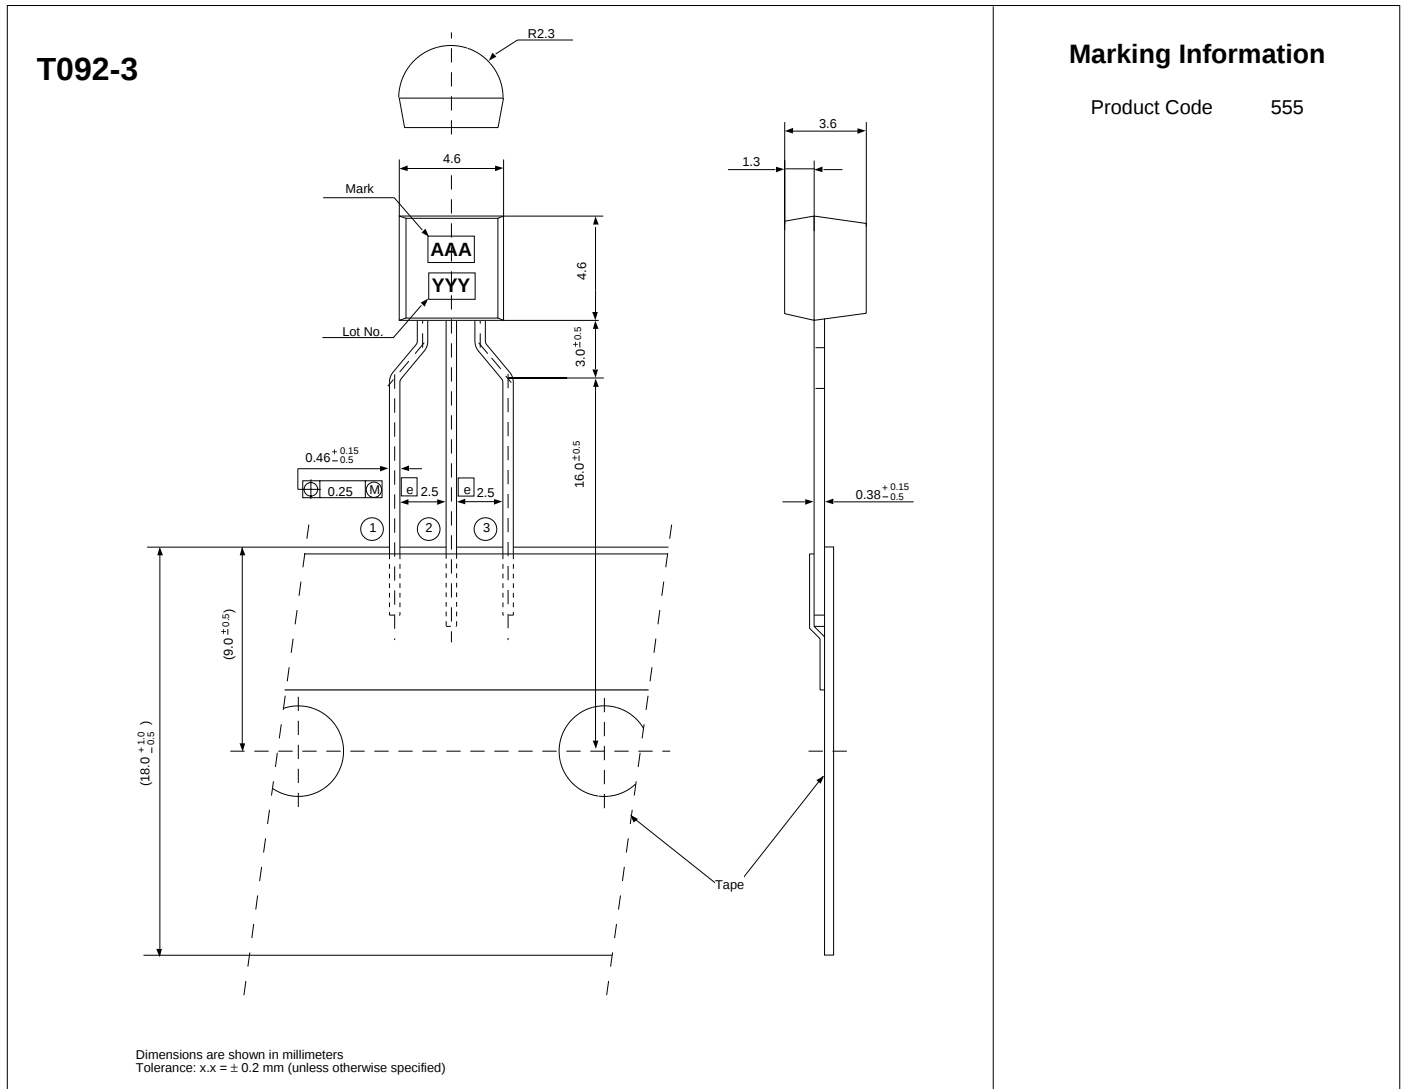

Toko America, Inc. Headquarters
1250 Feehanville Drive, Mount Prospect, Illinois 60056
Tel: (847) 297-0070 Fax: (847) 699-7864

TOKO AMERICA REGIONAL OFFICES

Midwest Regional Office
Toko America, Inc.
1250 Feehanville Drive
Mount Prospect, IL 60056
Tel: (847) 297-0070
Fax: (847) 699-7864

Western Regional Office
Toko America, Inc.
2480 North First Street, Suite 260
San Jose, CA 95131
Tel: (408) 432-8281
Fax: (408) 943-9790

Eastern Regional Office
Toko America, Inc.
107 Mill Plain Road
Danbury, CT 06811
Tel: (203) 748-6871
Fax: (203) 797-1223

Semiconductor Technical Support
Toko Design Center
4755 Forge Road
Colorado Springs, CO 80907
Tel: (719) 528-2200
Fax: (719) 528-2375

Visit our Internet site at <http://www.tokoam.com>

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.