

L780S00 Series

L780S05

Recommended Operating Conditions at Ta=25°C

Input Voltage Range	V_{IN}	7.5 to 20.0	V
Output Current Range	I_o	5 to 1000	mA

Operating Characteristics at Tj=25°C, $V_{IN}=10V$, $I_o=500mA$, $V_{st}=0V$, *Ta=25°C

		min	typ	max	unit
Output Voltage 1	V_{o1}	4.8	5.0	5.2	V
Line Regulation 1	ΔV_{oln1}	$7V \leq V_{IN} \leq 25V$	3	100	mV
Line Regulation 2	ΔV_{oln2}	$8V \leq V_{IN} \leq 12V$	1	50	mV
Load Regulation 1	ΔV_{old1}	$5mA \leq I_o \leq 1.5A$		100	mV
Load Regulation 2	ΔV_{old2}	$250mA \leq I_o \leq 750mA$		50	mV
Output Voltage 2	V_{o2}	$7V \leq V_{IN} \leq 20V$, $5mA \leq V_{IN} \leq 1A$	4.75	5.25	V
Current Dissipation	I_{cc}			8.0	mA
Current Dissipation Variation (Line)	ΔI_{ccln}	$7V \leq V_{IN} \leq 25V$		1.3	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5mA \leq I_o \leq 1A$		0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$ *	40		uV
Ripple Rejection	R_r	$f=120Hz$, $8V \leq V_{IN} \leq 18V$	62	78	dB
Dropout Voltage	V_{drop}	$I_o=1A$	2.0		V
Output Short Current	I_{os}	$V_{IN}=35V$	0.75		A
Peak Output Current	I_{op}		2.2		A
Output Voltage at Strobe Mode	$V_{o(ston)}$	$V_{IN}=35V$, $V_{st}=5V$, $I_o=0$, *		0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"		3.0	mA
Strobe Input Current	I_{st}	"		1.0	mA

L780S06

Recommended Operating Conditions at Ta=25°C

Input Voltage Range	V_{IN}	8.5 to 21.0	V
Output Current Range	I_o	5 to 1000	mA

Operating Characteristics at Tj=25°C, $V_{IN}=11V$, $I_o=500mA$, $V_{st}=0V$, *Ta=25°C

		min	typ	max	unit
Output Voltage 1	V_{o1}	5.75	6.0	6.25	V
Line Regulation 1	ΔV_{oln1}	$8V \leq V_{IN} \leq 25V$	5	120	mV
Line Regulation 2	ΔV_{oln2}	$9V \leq V_{IN} \leq 13V$	1.5	60	mV
Load Regulation 1	ΔV_{old1}	$5mA \leq I_o \leq 1.5A$		120	mV
Load Regulation 2	ΔV_{old2}	$250mA \leq I_o \leq 750mA$		60	mV
Output Voltage 2	V_{o2}	$8V \leq V_{IN} \leq 21V$, $5mA \leq V_{IN} \leq 1A$	5.7	6.3	V
Current Dissipation	I_{cc}			8.0	mA
Current Dissipation Variation (Line)	ΔI_{ccln}	$8V \leq V_{IN} \leq 25V$		1.3	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5mA \leq I_o \leq 1A$		0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$ *	45		uV
Ripple Rejection	R_r	$f=120Hz$, $9V \leq V_{IN} \leq 19V$	59	75	dB
Dropout Voltage	V_{drop}	$I_o=1A$	2.0		V
Output Short Current	I_{os}	$V_{IN}=35V$	0.75		A
Peak Output Current	I_{op}		2.2		A
Output Voltage at Strobe Mode	$V_{o(ston)}$	$V_{IN}=35V$, $V_{st}=5V$, $I_o=0$, *		0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"		3.0	mA
Strobe Input Current	I_{st}	"		1.0	mA

L780S00 Series

L780S07

Recommended Operating Conditions at Ta=25°C

Input Voltage Range	V_{IN}	9.5 to 22.0	V
Output Current Range	I_O	5 to 1000	mA

Operating Characteristics at Tj=25°C, $V_{IN}=12V$, $I_O=500mA$, $V_{st}=0V$, *Ta=25°C

		min	typ	max	unit
Output Voltage 1	V_{O1}	6.72	7.0	7.28	V
Line Regulation 1	ΔV_{Oln1}	$9V \leq V_{IN} \leq 26V$	6	140	mV
Line Regulation 2	ΔV_{Oln2}	$10V \leq V_{IN} \leq 14V$	2	70	mV
Load Regulation 1	ΔV_{old1}	$5mA \leq I_O \leq 1.5A$		140	mV
Load Regulation 2	ΔV_{old2}	$250mA \leq I_O \leq 750mA$		70	mV
Output Voltage 2	V_{O2}	$9V \leq V_{IN} \leq 22V$, $5mA \leq V_{IN} \leq 1A$	6.65	7.35	V
Current Dissipation	I_{cc}			8.0	mA
Current Dissipation Variation (Line)	ΔI_{ccln}	$9V \leq V_{IN} \leq 25V$		1.3	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5mA \leq I_O \leq 1A$		0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$ *	46		uV
Ripple Rejection	R_r	$f=120Hz$, $10V \leq V_{IN} \leq 21V$	58	73	dB
Dropout Voltage	V_{drop}	$I_O=1A$	2.0		V
Output Short Current	I_{os}	$V_{IN}=35V$	0.75		A
Peak Output Current	I_{op}		2.2		A
Output Voltage at Strobe Mode	$V_{O(ston)}$	$V_{IN}=35V$, $V_{st}=5V$, $I_O=0$, *		0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"		3.0	mA
Strobe Input Current	I_{st}	"		1.0	mA

L780S08

Recommended Operating Conditions at Ta=25°C

Input Voltage Range	V_{IN}	10.5 to 23.0	V
Output Current Range	I_O	5 to 1000	mA

Operating Characteristics at Tj=25°C, $V_{IN}=15V$, $I_O=500mA$, $V_{st}=0V$, *Ta=25°C

		min	typ	max	unit
Output Voltage 1	V_{O1}	7.7	8.0	8.3	V
Line Regulation 1	ΔV_{Oln1}	$10.5V \leq V_{IN} \leq 25V$	6.0	160	mV
Line Regulation 2	ΔV_{Oln2}	$11V \leq V_{IN} \leq 17V$	2.0	80	mV
Load Regulation 1	ΔV_{old1}	$5mA \leq I_O \leq 1.5A$		160	mV
Load Regulation 2	ΔV_{old2}	$250mA \leq I_O \leq 750mA$		80	mV
Output Voltage 2	V_{O2}	$10.5V \leq V_{IN} \leq 23V$, $5mA \leq V_{IN} \leq 1A$	7.6	8.4	V
Current Dissipation	I_{cc}			8.0	mA
Current Dissipation Variation (Line)	ΔI_{ccln}	$10.5V \leq V_{IN} \leq 25V$		1.0	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5mA \leq I_O \leq 1A$		0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$ *	52		uV
Ripple Rejection	R_r	$f=120Hz$, $11.5V \leq V_{IN} \leq 21.5V$	56	72	dB
Dropout Voltage	V_{drop}	$I_O=1A$	2.0		V
Output Short Current	I_{os}	$V_{IN}=35V$	0.75		A
Peak Output Current	I_{op}		2.2		A
Output Voltage at Strobe Mode	$V_{O(ston)}$	$V_{IN}=35V$, $V_{st}=5V$, $I_O=0$, *		0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"		3.0	mA
Strobe Input Current	I_{st}	"		1.0	mA

L780500 Series

L780S09

Recommended Operating Conditions at $T_a=25^{\circ}\text{C}$

Input Voltage Range	V_{IN}	11.5 to 25.0	V
Output Current Range	I_O	5 to 1000	mA

Operating Characteristics at $T_j=25^{\circ}\text{C}$, $V_{IN}=16\text{V}$, $I_O=500\text{mA}$, $V_{st}=0\text{V}$, $*T_a=25^{\circ}\text{C}$

			min	typ	max	unit
Output Voltage 1	V_{O1}		8.64	9.0	9.36	V
Line Regulation 1	ΔV_{Oln1}	$11.5\text{V} \leq V_{IN} \leq 25\text{V}$		7	180	mV
Line Regulation 2	ΔV_{Oln2}	$12\text{V} \leq V_{IN} \leq 20\text{V}$		2	90	mV
Load Regulation 1	ΔV_{old1}	$5\text{mA} \leq I_O \leq 1.5\text{A}$			180	mV
Load Regulation 2	ΔV_{old2}	$250\text{mA} \leq I_O \leq 750\text{mA}$			90	mV
Output Voltage 2	V_{O2}	$11.5\text{V} \leq V_{IN} \leq 24\text{V}$, $5\text{mA} \leq I_{IN} \leq 1\text{A}$	8.55		9.45	V
Current Dissipation	I_{cc}				8.0	mA
Current Dissipation Variation (Line)	ΔI_{ccln}	$11.5\text{V} \leq V_{IN} \leq 26\text{V}$			1.0	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5\text{mA} \leq I_O \leq 1\text{A}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$ *		57		μV
Ripple Rejection	R_r	$f=120\text{Hz}$, $12\text{V} \leq V_{IN} \leq 22\text{V}$	56	72		dB
Dropout Voltage	V_{drop}	$I_O=1\text{A}$		2.0		V
Output Short Current	I_{os}	$V_{IN}=35\text{V}$		0.75		A
Peak Output Current	I_{op}			2.2		A
Output Voltage at Strobe Mode	$V_{O(ston)}$	$V_{IN}=35\text{V}$, $V_{st}=5\text{V}$, $I_O=0$, *			0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"			3.0	mA
Strobe Input Current	I_{st}	"			1.0	mA

L780S10

Recommended Operating Conditions at $T_a=25^{\circ}\text{C}$

Input Voltage Range	V_{IN}	13.0 to 25.0	V
Output Current Range	I_O	5 to 1000	mA

Operating Characteristics at $T_j=25^{\circ}\text{C}$, $V_{IN}=17\text{V}$, $I_O=500\text{mA}$, $V_{st}=0\text{V}$, $*T_a=25^{\circ}\text{C}$

			min	typ	max	unit
Output Voltage 1	V_{O1}		9.6	10.0	10.4	V
Line Regulation 1	ΔV_{Oln1}	$12.5\text{V} \leq V_{IN} \leq 28\text{V}$		8	200	mV
Line Regulation 2	ΔV_{Oln2}	$14\text{V} \leq V_{IN} \leq 20\text{V}$		2.5	100	mV
Load Regulation 1	ΔV_{old1}	$5\text{mA} \leq I_O \leq 1.5\text{A}$			200	mV
Load Regulation 2	ΔV_{old2}	$250\text{mA} \leq I_O \leq 750\text{mA}$			100	mV
Output Voltage 2	V_{O2}	$12.5\text{V} \leq V_{IN} \leq 25\text{V}$, $5\text{mA} \leq I_{IN} \leq 1\text{A}$	9.5		10.5	V
Current Dissipation	I_{cc}				8.0	mA
Current Dissipation Variation (Line)	ΔI_{ccln}	$12.5\text{V} \leq V_{IN} \leq 25\text{V}$			1.0	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5\text{mA} \leq I_O \leq 1\text{A}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$ *		63		μV
Ripple Rejection	R_r	$f=120\text{Hz}$, $13\text{V} \leq V_{IN} \leq 23\text{V}$	55	72		dB
Dropout Voltage	V_{drop}	$I_O=1\text{A}$		2.0		V
Output Short Current	I_{os}	$V_{IN}=35\text{V}$		0.75		A
Peak Output Current	I_{op}			2.2		A
Output Voltage at Strobe Mode	$V_{O(ston)}$	$V_{IN}=35\text{V}$, $V_{st}=5\text{V}$, $I_O=0$, *			0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"			3.0	mA
Strobe Input Current	I_{st}	"			1.0	mA

L780500 Series

L780S12

Recommended Operating Conditions at $T_a=25^\circ\text{C}$

Input Voltage Range	V_{IN}	15.0 to 27.0	V
Output Current Range	I_o	5 to 1000	mA

Operating Characteristics at $T_j=25^\circ\text{C}$, $V_{IN}=19\text{V}$, $I_o=500\text{mA}$, $V_{st}=0\text{V}$, * $T_a=25^\circ\text{C}$

			min	typ	max	unit
Output Voltage 1	V_{o1}		11.5	12.0	12.5	V
Line Regulation 1	ΔV_{oln1}	$14.5\text{V} \leq V_{IN} \leq 30\text{V}$		10	240	mV
Line Regulation 2	ΔV_{oln2}	$16\text{V} \leq V_{IN} \leq 22\text{V}$		3	120	mV
Load Regulation 1	ΔV_{old1}	$5\text{mA} \leq I_o \leq 1.5\text{A}$			240	mV
Load Regulation 2	ΔV_{old2}	$250\text{mA} \leq I_o \leq 750\text{mA}$			120	mV
Output Voltage 2	V_{o2}	$14.5\text{V} \leq V_{IN} \leq 27\text{V}$, $5\text{mA} \leq V_{IN} \leq 1\text{A}$	11.4		12.6	V
Current Dissipation	I_{cc}				8.0	mA
Current Dissipation Variation (Line)	ΔI_{ccln}	$14.5\text{V} \leq V_{IN} \leq 30\text{V}$			1.0	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5\text{mA} \leq I_o \leq 1\text{A}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$ *		75		μV
Ripple Rejection	R_r	$f=120\text{Hz}$, $15\text{V} \leq V_{IN} \leq 25\text{V}$	55	71		dB
Dropout Voltage	V_{drop}	$I_o=1\text{A}$		2.0		V
Output Short Current	I_{os}	$V_{IN}=35\text{V}$		0.75		A
Peak Output Current	I_{op}			2.2		A
Output Voltage at Strobe Mode	$V_{o(ston)}$	$V_{IN}=35\text{V}$, $V_{st}=5\text{V}$, $I_o=0$, *			0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"			3.0	mA
Strobe Input Current	I_{st}	"			1.0	mA

L780S15

Recommended Operating Conditions at $T_a=25^\circ\text{C}$

Input Voltage Range	V_{IN}	18.0 to 30.0	V
Output Current Range	I_o	5 to 1000	mA

Operating Characteristics at $T_j=25^\circ\text{C}$, $V_{IN}=23\text{V}$, $I_o=500\text{mA}$, $V_{st}=0\text{V}$, * $T_a=25^\circ\text{C}$

			min	typ	max	unit
Output Voltage 1	V_{o1}		14.4	15.0	15.6	V
Line Regulation 1	ΔV_{oln1}	$17.5\text{V} \leq V_{IN} \leq 30\text{V}$		11	300	mV
Line Regulation 2	ΔV_{oln2}	$20\text{V} \leq V_{IN} \leq 26\text{V}$		3	150	mV
Load Regulation 1	ΔV_{old1}	$5\text{mA} \leq I_o \leq 1.5\text{A}$			300	mV
Load Regulation 2	ΔV_{old2}	$250\text{mA} \leq I_o \leq 750\text{mA}$			150	mV
Output Voltage 2	V_{o2}	$17.5\text{V} \leq V_{IN} \leq 30\text{V}$, $5\text{mA} \leq V_{IN} \leq 1\text{A}$	14.25		15.75	V
Current Dissipation	I_{cc}				8.0	mA
Current Dissipation Variation (Line)	ΔI_{ccln}	$17.5\text{V} \leq V_{IN} \leq 30\text{V}$			1.0	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5\text{mA} \leq I_o \leq 1\text{A}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$ *		90		μV
Ripple Rejection	R_r	$f=120\text{Hz}$, $18.5\text{V} \leq V_{IN} \leq 28.5\text{V}$	54	70		dB
Dropout Voltage	V_{drop}	$I_o=1\text{A}$		2.0		V
Output Short Current	I_{os}	$V_{IN}=35\text{V}$		0.75		A
Peak Output Current	I_{op}			2.2		A
Output Voltage at Strobe Mode	$V_{o(ston)}$	$V_{IN}=35\text{V}$, $V_{st}=5\text{V}$, $I_o=0$, *			0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"			3.0	mA
Strobe Input Current	I_{st}	"			1.0	mA

L780500 Series

L780S18

Recommended Operating Conditions at $T_a=25^{\circ}\text{C}$

Input Voltage Range	V_{IN}	21.0 to 33.0	V
Output Current Range	I_o	5 to 1000	mA

Operating Characteristics at $T_j=25^{\circ}\text{C}$, $V_{IN}=27\text{V}$, $I_o=500\text{mA}$, $V_{st}=0\text{V}$, $T_a=25^{\circ}\text{C}$

			min	typ	max	unit
Output Voltage 1	V_{o1}		17.3	18.0	18.7	V
Line Regulation 1	ΔV_{oln1}	$21\text{V} \leq V_{IN} \leq 33\text{V}$		15	360	mV
Line Regulation 2	ΔV_{oln2}	$24\text{V} \leq V_{IN} \leq 30\text{V}$		5	180	mV
Load Regulation 1	ΔV_{old1}	$5\text{mA} \leq I_o \leq 1.5\text{A}$			360	mV
Load Regulation 2	ΔV_{old2}	$250\text{mA} \leq I_o \leq 750\text{mA}$			180	mV
Output Voltage 2	V_{o2}	$21\text{V} \leq V_{IN} \leq 33\text{V}$, $5\text{mA} \leq V_{IN} \leq 1\text{A}$	17.1		18.9	V
Current Dissipation	I_{cc}				8.0	mA
Current Dissipation Variation (Line)	ΔI_{ccln}	$21\text{V} \leq V_{IN} \leq 33\text{V}$			1.0	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5\text{mA} \leq I_o \leq 1\text{A}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}^*$		110		μV
Ripple Rejection	R_r	$f=120\text{Hz}$, $22\text{V} \leq V_{IN} \leq 32\text{V}$	53	69		dB
Dropout Voltage	V_{drop}	$I_o=1\text{A}$		2.0		V
Output Short Current	I_{os}	$V_{IN}=35\text{V}$		0.75		A
Peak Output Current	I_{op}			2.2		A
Output Voltage at Strobe Mode	$V_{o(ston)}$	$V_{IN}=35\text{V}$, $V_{st}=5\text{V}$, $I_o=0,^*$			0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"			3.0	mA
Strobe Input Current	I_{st}	"			1.0	mA

L780S20

Recommended Operating Conditions at $T_a=25^{\circ}\text{C}$

Input Voltage Range	V_{IN}	23.0 to 35.0	V
Output Current Range	I_o	5 to 1000	mA

Operating Characteristics at $T_j=25^{\circ}\text{C}$, $V_{IN}=29\text{V}$, $I_o=500\text{mA}$, $V_{st}=0\text{V}$, $T_a=25^{\circ}\text{C}$

			min	typ	max	unit
Output Voltage 1	V_{o1}		19.2	20.0	20.8	V
Line Regulation 1	ΔV_{oln1}	$23\text{V} \leq V_{IN} \leq 35\text{V}$		15	400	mV
Line Regulation 2	ΔV_{oln2}	$26\text{V} \leq V_{IN} \leq 32\text{V}$		5	200	mV
Load Regulation 1	ΔV_{old1}	$5\text{mA} \leq I_o \leq 1.5\text{A}$			400	mV
Load Regulation 2	ΔV_{old2}	$250\text{mA} \leq I_o \leq 750\text{mA}$			200	mV
Output Voltage 2	V_{o2}	$24\text{V} \leq V_{IN} \leq 35\text{V}$, $5\text{mA} \leq V_{IN} \leq 1\text{A}$	19.0		21.0	V
Current Dissipation	I_{cc}				8.0	mA
Current Dissipation Variation (Line)	ΔI_{ccln}	$23\text{V} \leq V_{IN} \leq 35\text{V}$			1.0	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5\text{mA} \leq I_o \leq 1\text{A}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}^*$		110		μV
Ripple Rejection	R_r	$f=120\text{Hz}$, $24\text{V} \leq V_{IN} \leq 34\text{V}$	53	67		dB
Dropout Voltage	V_{drop}	$I_o=1\text{A}$		2.0		V
Output Short Current	I_{os}	$V_{IN}=35\text{V}$		0.75		A
Peak Output Current	I_{op}			2.2		A
Output Voltage at Strobe Mode	$V_{o(ston)}$	$V_{IN}=35\text{V}$, $V_{st}=5\text{V}$, $I_o=0,^*$			0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"			3.0	mA
Strobe Input Current	I_{st}	"			1.0	mA

L780S00 Series

L780S24


Recommended Operating Conditions at $T_a=25^\circ\text{C}$

Input Voltage Range	V_{IN}	27.0 to 35.0	V
Output Current Range	I_o	5 to 1000	mA









Operating Characteristics at $T_j=25^\circ\text{C}$, $V_{IN}=33\text{V}$, $I_o=500\text{mA}$, $V_{st}=0\text{V}$, $*T_a=25^\circ\text{C}$

			min	typ	max	unit
Output Voltage 1	V_{o1}		23.0	24.0	25.0	V
Line Regulation 1	ΔV_{o1n1}	$27\text{V} \leq V_{IN} \leq 35\text{V}$		18	480	mV
Line Regulation 2	ΔV_{o1n2}	$30\text{V} \leq V_{IN} \leq 35\text{V}$		6	240	mV
Load Regulation 1	ΔV_{old1}	$5\text{mA} \leq I_o \leq 1.5\text{A}$			480	mV
Load Regulation 2	ΔV_{old2}	$250\text{mA} \leq I_o \leq 750\text{mA}$			240	mV
Output Voltage 2	V_{o2}	$27\text{V} \leq V_{IN} \leq 35\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$	22.8		25.2	V
Current Dissipation	I_{cc}				8.0	mA
Current Dissipation Variation (Line)	ΔI_{cc1n}	$27\text{V} \leq V_{IN} \leq 35\text{V}$			1.0	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5\text{mA} \leq I_o \leq 1\text{A}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$		180		μV
Ripple Rejection	R_r	$f=120\text{Hz}$, $28\text{V} \leq V_{IN} \leq 34\text{V}$	50	66		dB
Dropout Voltage	V_{drop}	$I_o=1\text{A}$		2.0		V
Output Short Current	I_{os}	$V_{IN}=35\text{V}$		0.75		A
Peak Output Current	I_{op}			2.2		A
Output Voltage at Strobe Mode	$V_{o(ston)}$	$V_{IN}=35\text{V}$, $V_{st}=5\text{V}$, $I_o=0$, *			0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"			3.0	mA
Strobe Input Current	I_{st}	"			1.0	mA




Equivalent Circuit Block Diagram

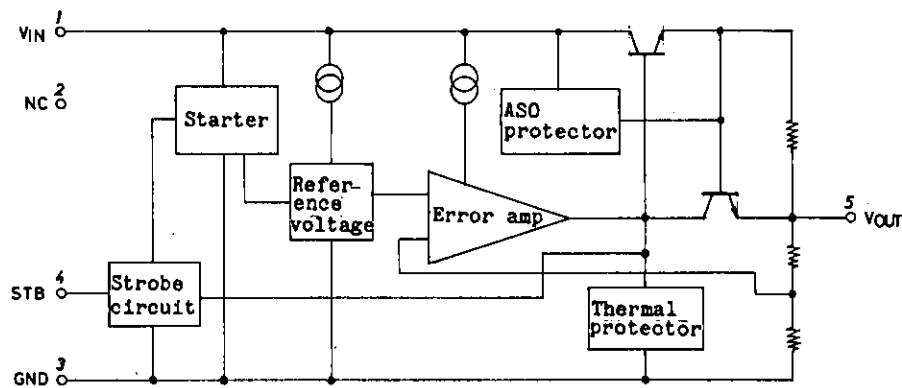

L780S00 Series

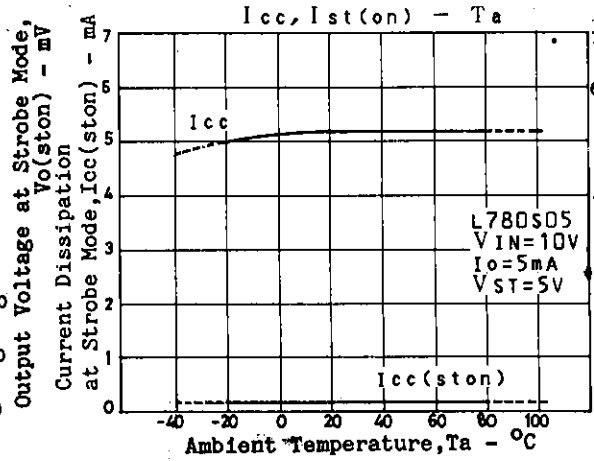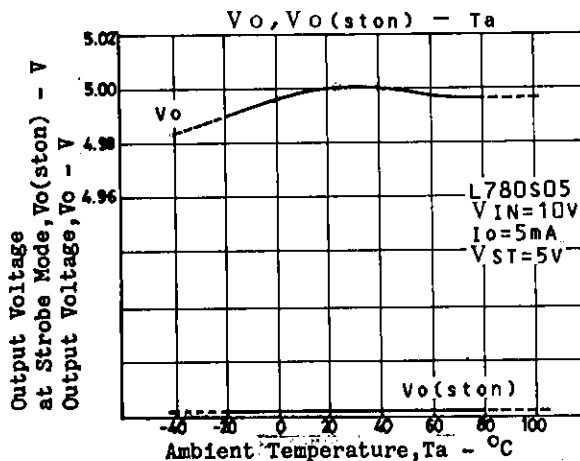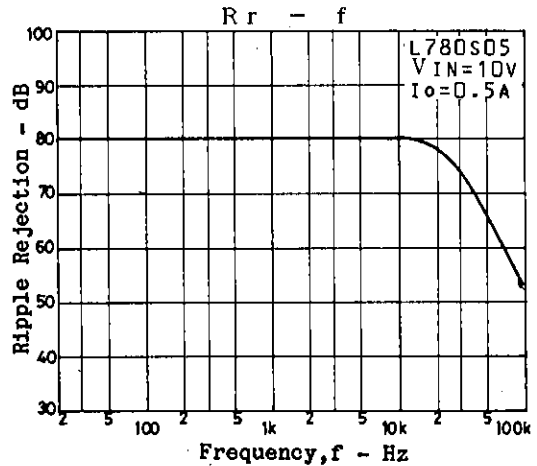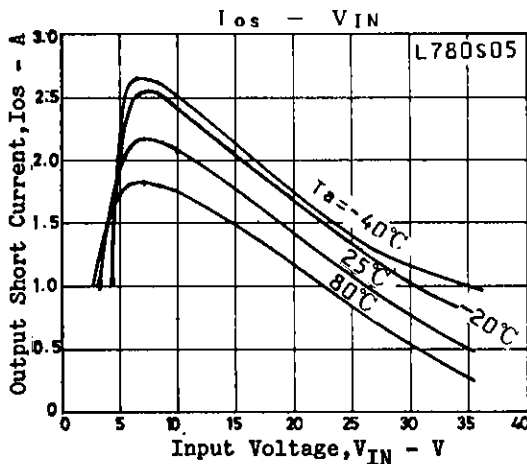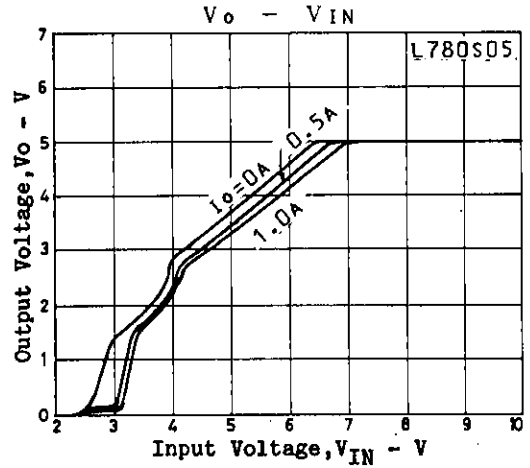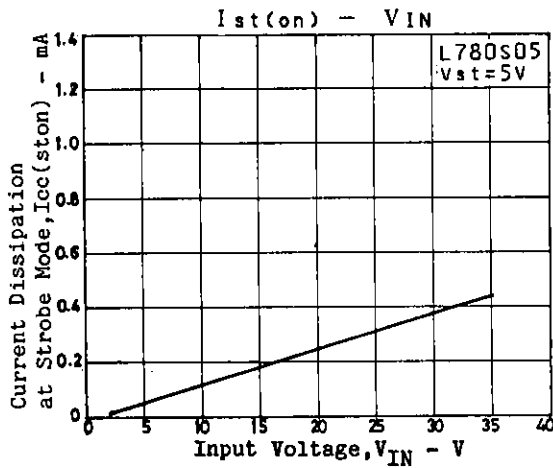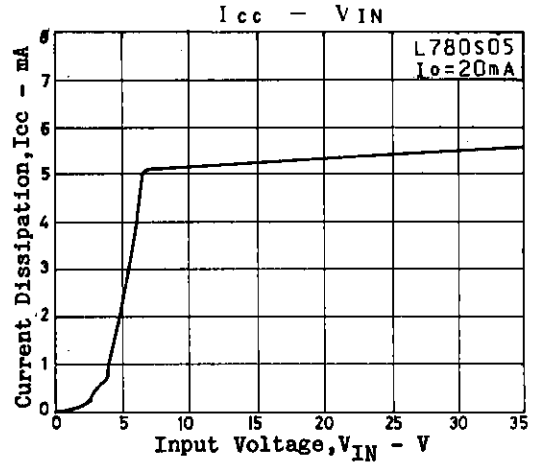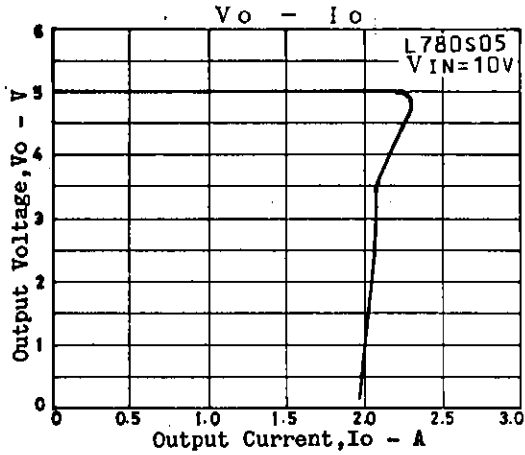

L780S00 Series

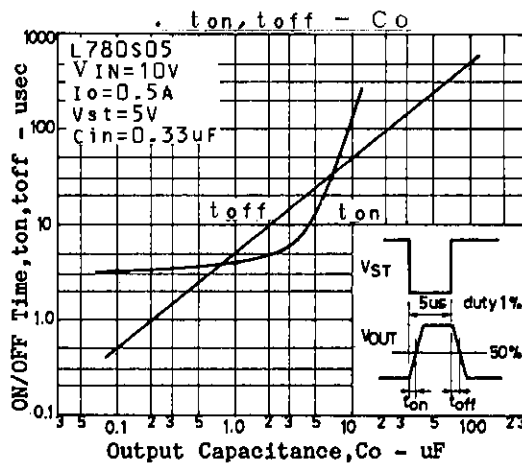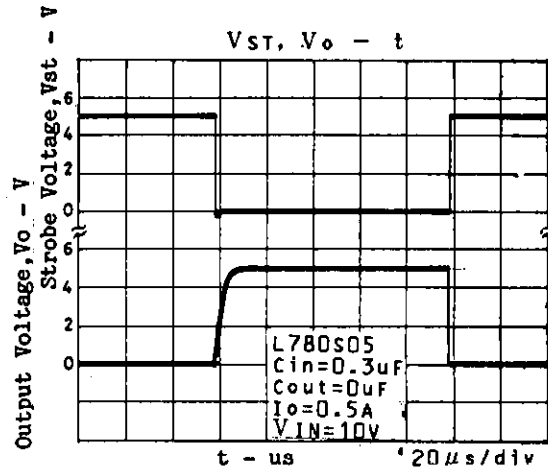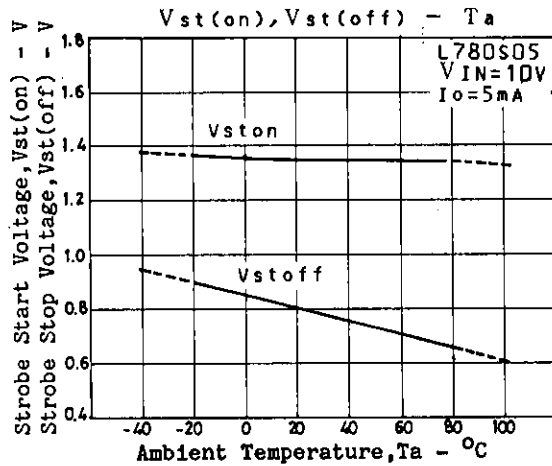

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use.
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.