



PWRLITE LD1003S

High Performance N-Channel *POWERJFET™* with Schottky Diode



Features

- ❖ Trench Power JFET with low threshold voltage V_{th} .
- ❖ Device fully "ON" with $V_{gs} = 0.7V$
- ❖ Optimum for "Low Side" Buck Converters
- ❖ Optimized for Secondary Rectification in isolated DC-DC
- ❖ Low R_g and low C_{ds} for high speed switching
- ❖ No "Body Diode"; extremely low C_{ds}
- ❖ Added Fast Recovery Schottky Diode in same package


Applications

- ❖ DC-DC Converters
- ❖ Synchronous Rectifiers
- ❖ PC Motherboard Converters
- ❖ Step-down power supplies
- ❖ Brick Modules
- ❖ VRM Modules

Description

The Power JFET transistor from Lovoltech is a device that presents a Low $R_{ds(on)}$ allowing for improved efficiencies in DC-DC switching applications. The device is designed with a low threshold such that drivers can operate at 5V, which reduces the driver power dissipation and increases the overall efficiency. Lower threshold produces faster turn-on/turn-off, which minimizes the required dead time. The transistor "No Body Diode" provides a very low associated parasitic capacitance C_{ds} . A Schottky Diode is added for applications where a freewheeling diode is required. Ringing is also reduced so that a lower voltage device may be a better solution.

DPAK Pin Assignments




Pin Definitions

Pin Number	Pin Name	Pin Function Description	Product Summary		
1	Gate	Gate. Transistor Gate	V_{DS} (V)	$R_{ds(on)}$ (Ω)	I_D (A)
2, 4	Drain	Drain. Transistor Drain	24V	0.0045	50
3	Source	Source. Transistor Source			

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Units
Drain-Source Voltage	V_{DS}	24	V
Gate-Source Voltage	V_{GS}	-10	V
Gate-Drain Voltage	V_{GD}	-28	V
Continuous Drain Current	I_D	50	A
Pulsed Drain Current	I_D	100	A
Single Pulse Drain-to-Source Avalanche Energy at 25°C ($V_{DD} = 5V_{DC}$, $I_L = 60A_{PK}$, $L = 0.3mH$, $R_G = 100\Omega$)	E_{AS}	220	mJ
Junction Temperature	T_J	-55 to 150°C	°C
Storage Temperature	T_{STG}	-65 to 150°C	°C
Lead Soldering Temperature, 10 seconds	T	260°C	°C
Power Dissipation (Derated at 25°C)	P_D	80	W



Thermal Resistance

Symbol	Parameter		DPAK Ratings		Units
$R_{\theta JA}$	Thermal Resistance Junction-to-Ambient		80		°C/W
$R_{\theta JC}$	Thermal Resistance Junction-to-Case		1.6		°C/W

Electrical Specifications

($T_A = +25^{\circ}\text{C}$, unless otherwise noted.)

The ϕ denotes a specification which apply over the full operating temperature range.

The φ denotes a specification which apply over the full operating temperature range.							
Symbol	Parameter	Conditions		Min.	Typ.	Max.	Units
	Static						
BV _{DSX}	Breakdown Voltage Drain to Source	I _D = 0.5 mA V _{GS} = -4 V		24			V
BV _{GDO}	Breakdown Voltage Gate to Drain	I _G = -50μA				-28	V
BV _{GSO}	Breakdown Voltage Gate to Source	I _G = -1 mA			-12	-10	V
R _{DS(ON)}	Static Drain to Source ¹ On Resistance (Current flows drain-to-source) See Fig. 1	I _G = 40 mA, I _D =10A I _G = 10 mA, I _D =10A I _G = 5 mA, I _D =10A			3.0 3.5 3.6	4.0 5.5	mΩ mΩ
V _{GS(TH)}	Gate Threshold Voltage	V _{DS} =0.1 V, I _D =250μA		-1200	-800	-600	mV
	Dynamic						
Q _G	Total Gate Charge	ΔV _{Drive} =5V, I _D =10A, V _{DS} =15V			23		nC
Q _{GD}	Gate to Drain Charge				14		nC
Q _{GS}	Gate to Source Charge				1.8		nC
Q _{SW}	Switching Charge				15		nC
R _G	Gate Resistance				0.5		Ω
T _{D(ON)}	Turn-on Delay Time	V _{DD} =16V, I _D =15A V _{Drive} = 5 V Clamped Inductive Load			5		ns
T _R	Rise Time				12		
T _{D(OFF)}	Turn-off Delay				2		
T _F	Fall Time				10		
C _{ISS}	Input Capacitance	V _{DS} =10V, V _{GS} = -5 V, 1MHz.			3200		pF
C _{OSS}	Output Capacitance				900		
C _{GS}	Gate-Source Capacitance				2250		
C _{GD}	Gate-Drain Capacitance				750		
C _{DS}	Drain-Source Capacitance				150		
	Schottky Diode						
I _R	Reverse Leakage	V _R =20V, V _{gs} = -4V			0.25	0.3	mA
V _F	Forward Voltage	I _F = 1 A			300		mV
V _F	Forward Voltage	I _F = 10 A			700		mV
V _F	Forward Voltage	I _F = 20 A			900		mV
Q _{rr}	Reverse Recovery Charge	I _s = 20 A di/dt = 100A/us,			8		nC

Notes:

1. Pulse width $\leq 500 \mu\text{s}$, duty cycle $\leq 2\%$



Typical Operating Characteristics

($T_A = +25^\circ\text{C}$, unless otherwise noted.)

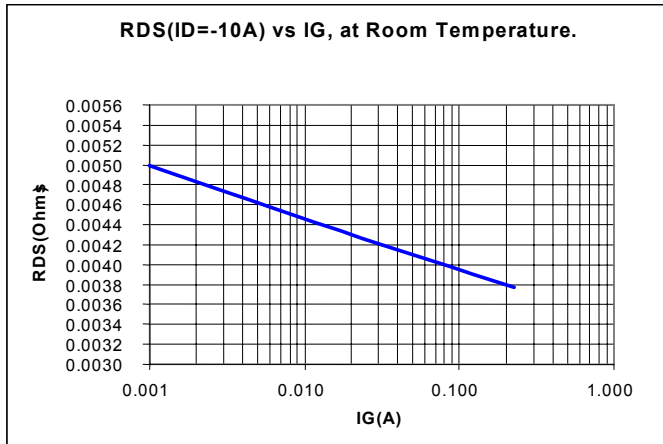


Figure 1 – $R_{DS(on)}$ vs Gate Current at $I_D = -10\text{A}$

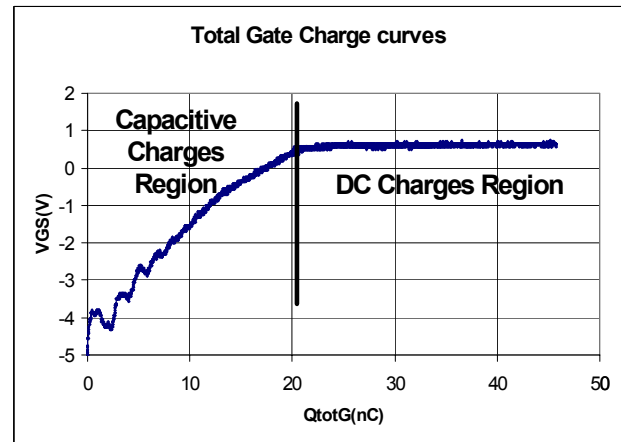


Figure 2 – Total Gate Charge

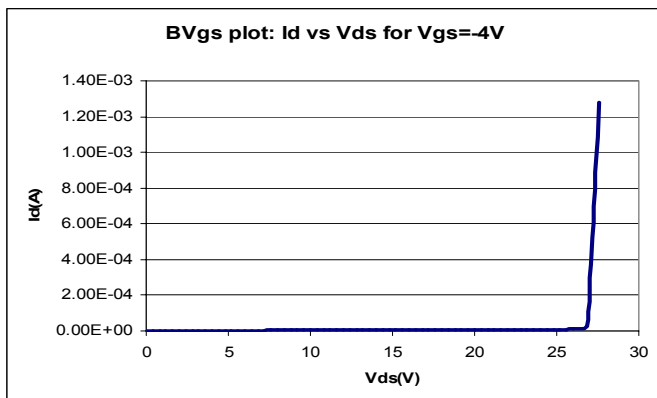


Figure 3 – Breakdown Voltage V_{ds} vs I_d

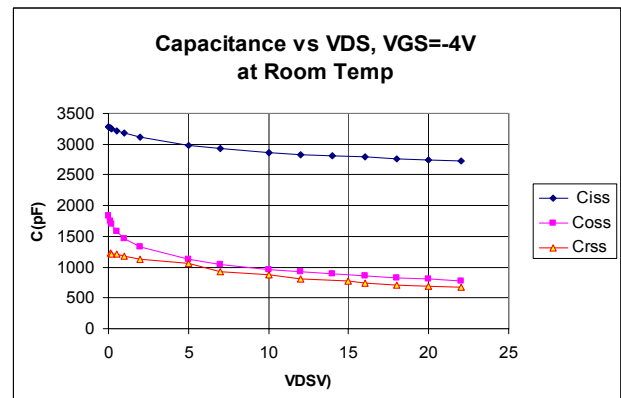


Figure 4 – Capacitance vs Drain Voltage V_{ds}

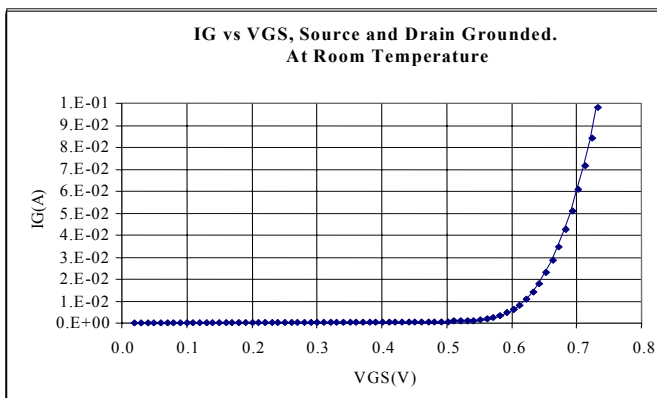


Figure 5 – I_G vs Gate Voltage V_{GS}

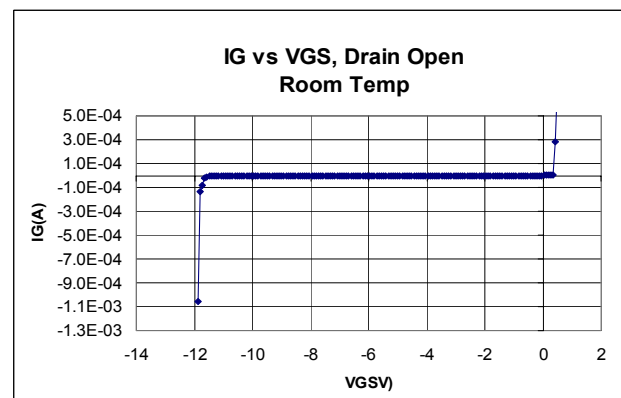


Figure 6 – Typical Gate Voltage Characteristic

Typical Operating Characteristics

($T_A = +25^{\circ}\text{C}$, unless otherwise noted.)

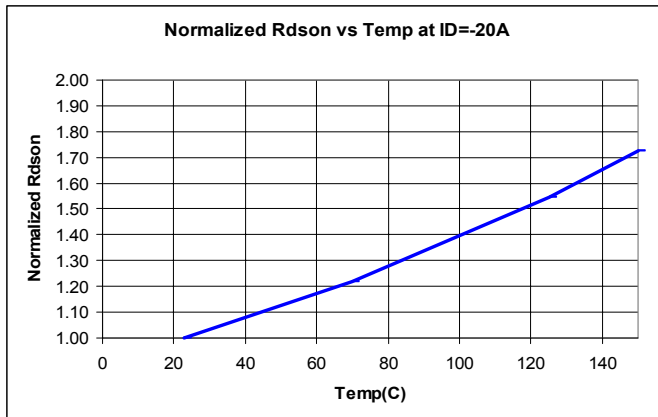


Figure 7 – $R_{\text{DS(on)}}$ Temperature Coefficient

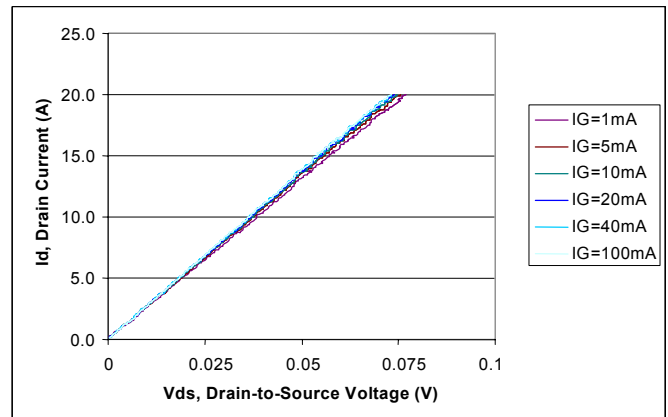


Figure 8 – On-Region Characteristics

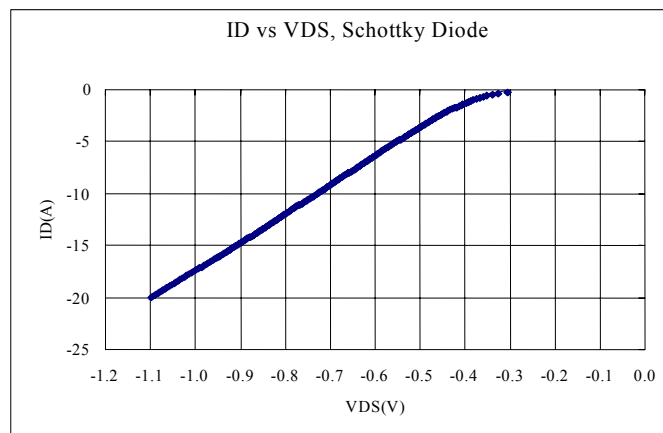


Figure 9 – Diode Voltage vs Current

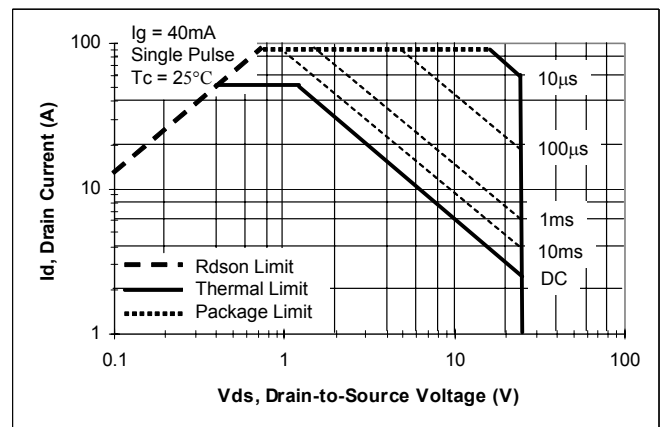


Figure 10 – Safe Operating Area

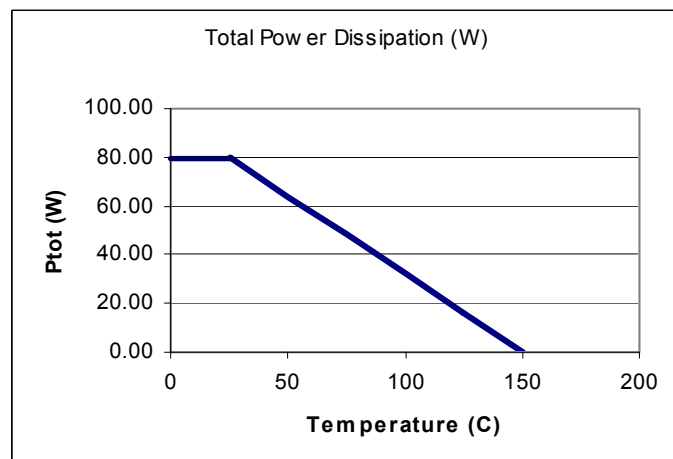


Figure 11 – Total Power Dissipation

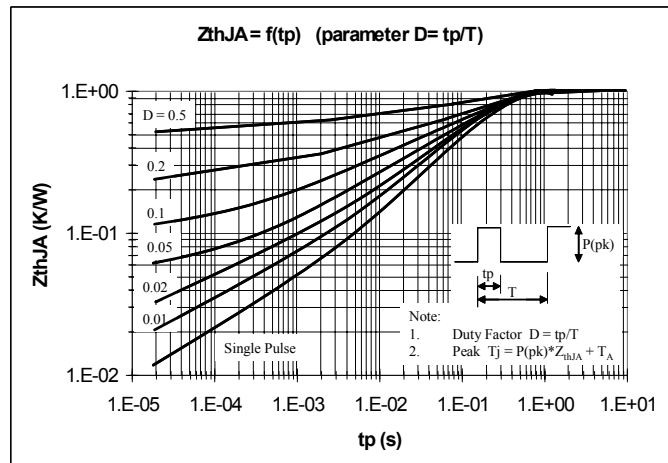


Figure 12 – Normalized Thermal Response


Ordering Information

Product Number	PN Marking	Package	Notes:
LD1003S	LD1003S	TO252 (DPAK)	This product is Pb-Free and has Tin Plated leads

Package and Marking Information:

DIMENSIONS

DIM.	mm.			inch		
	TYP.	MIN.	MAX.	TYP.	MIN.	MAX.
A		2.19	2.40	0.086	0.094	
A1		0.89	1.14	0.035	0.045	
A2		0.03	0.13	0.001	0.005	
b		0.76	1.14	0.030	0.045	
b1		0.55	0.90	0.022	0.035	
B2		5.20	5.46	0.205	0.215	
C		0.45	0.60	0.017	0.023	
C2		0.45	0.58	0.017	0.023	
D		5.97	6.22	0.235	0.245	
D1	5.30			0.208		
E		6.35	6.73	0.250	0.265	
e	2.28			0.090		
H		9.35	10.42	0.368	0.410	
L2		0.88	1.27	0.035	0.050	
L3		1.86	3.57	0.073	0.140	
L4		0.64	1.02	0.025	0.040	
R	0.20			0.008		
Alternate						
D		5.40	5.60	0.213	0.220	
L2		1.25	1.75	0.049	0.069	
L3		2.60	2.80	0.102	0.110	
H		9.65	9.75	0.380	0.384	

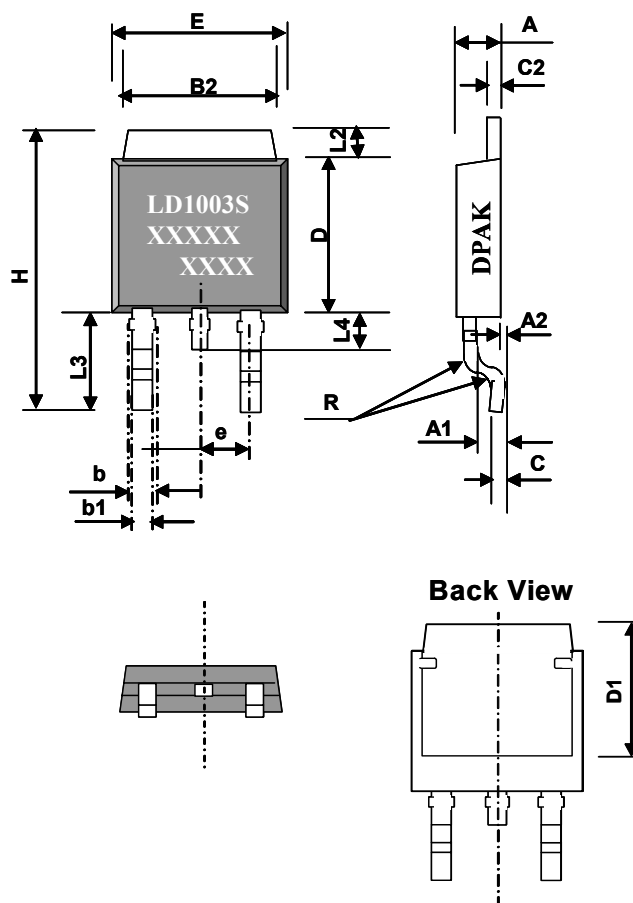

Life Support Policy

LOVOLTECH's PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF LOVOLTECH, Inc. As used herein:

- Life support devices or systems are devices or systems which (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Datasheet Identification	Product Status	Definition
Advance Information	In definition or in Design	This datasheet contains the design specifications for product development. Specifications may change without notice.
Preliminary	Initial Production	This datasheet contains preliminary data; additional and application data will be published at a later date. Lovoltech, Inc. reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	In Production	This datasheet contains final specifications. Lovoltech reserves the right to make changes at any time without notice in order to improve the design.