



**PRELIMINARY**  
September 2005

# LMV651

## 12 MHz, Low Voltage, Low Power Amplifier

### General Description

National's LMV651 is a high performance, low power op amp IC implemented in National's advanced VIP50 process. The unity gain stable LMV651 features 12 MHz of bandwidth while consuming only 110  $\mu$ A of current, an exceptional bandwidth to power ratio in this op amp class, and maintains stability for capacitive loads as large as 500 pF.

The LMV651 provides superior performance and economy in terms of power and space usage. The LMV651 has a maximum input offset voltage of 1 mV, a rail to rail output stage and an input common-mode voltage range that includes ground. The LMV651 provides a PSRR of 95 dB, a CMRR of 100 dB and a total harmonic distortion (THD) of 0.003% at 1 kHz frequency and 600 $\Omega$  load

The LMV651 has an operating supply voltage range from 2.7V to 5.5V. The LMV651 can operate over a wide temperature range (-40 $^{\circ}$ C to +125 $^{\circ}$ C) making the op amp ideal for automotive applications, sensor applications and portable equipment applications. The LMV651 is available in the ultra tiny SC70-5 package, which is about half the size of the SOT23-5.


### Features

(Typical 5V supply, unless otherwise noted)

- Guaranteed 3.0V and 5.0V performance
- High unity gain bandwidth 12 MHz
- Low power supply current 110  $\mu$ A
- Max input offset voltage 1 mV
- Capacitive load drive capability 500 pF
- CMRR 100 dB
- PSRR 95 dB
- Input referred voltage noise 17nV/ $\sqrt{\text{Hz}}$
- Output swing with 2 k $\Omega$  load 50 mV from rail
- Total harmonic distortion 0.003% @ 1 kHz, 600 $\Omega$
- Temperature range -40 $^{\circ}$ C to 125 $^{\circ}$ C


### Applications

- Portable equipment
- Automotive
- Battery powered systems
- Sensors and Instrumentation

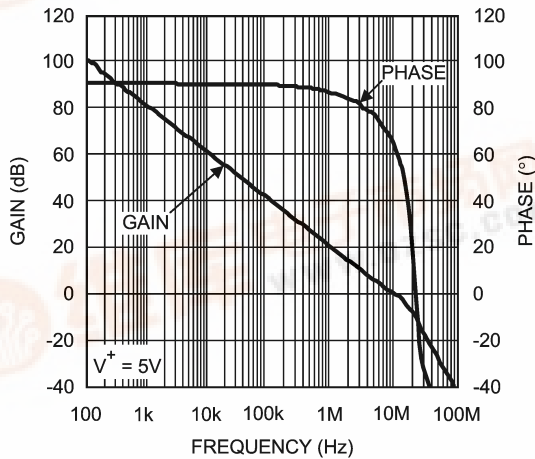

Open Loop Gain and phase vs. Frequency

20123806

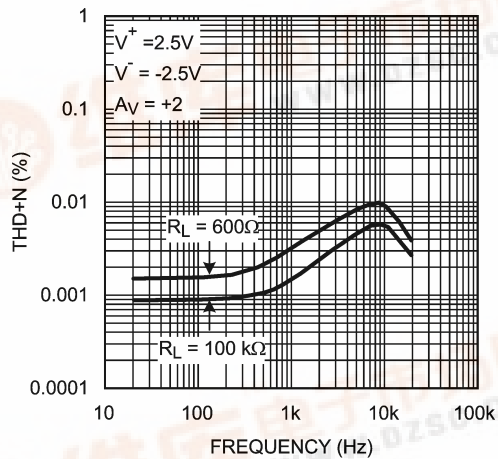

THD+N vs. Frequency

20123805

LMV651 12 MHz, Low Voltage, Low Power Amplifier



**Absolute Maximum Ratings** (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

ESD Tolerance (Note 2)	
Human Body	2 KV
Machine Model	200V
$V_{IN}$ Differential	$\pm 0.3V$
Supply Voltage ( $V^+ - V^-$ )	6V
Input/Output Pin Voltage	$V^+ + 0.3V, V^- - 0.3V$
Storage Temperature Range	$-65^\circ C$ to $+150^\circ C$
Junction Temperature (Note 3)	$+150^\circ C$

## Soldering Information

Infrared or Convection (20 sec)	$235^\circ C$
Wave Soldering Lead Temp (10 sec)	$260^\circ C$

**Operating Ratings** (Note 1)

Temperature Range	$-40^\circ C$ to $125^\circ C$
Supply Voltage	2.7V to 5.5V
Package Thermal Resistance ( $\theta_{JA}$ )(Note 3)	
5-Pin SC70	$456^\circ C/W$

**3V DC Electrical Characteristics**

Unless otherwise specified, all limits are guaranteed for  $T_A = 25^\circ C$ ,  $V^+ = 3V$ ,  $V^- = 0V$ ,  $V_O = V_{CM} = V^+/2$ , and  $R_L > 1 M\Omega$ . **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Min (Note 5)	Typ (Note 4)	Max (Note 5)	Units
$V_{OS}$	Input Offset Voltage			-0.1	$\pm 1$	mV
$I_B$	Input Bias Current	(Note 6)		80		nA
$I_{OS}$	Input Offset Current			2.2		nA
CMRR	Common Mode Rejection Ratio	$0 \leq V_{CM} \leq 1.5V$	90	100		dB
PSRR	Power Supply Rejection Ratio	$3.0 \leq V^+ \leq 5V$ , $V_O = 1.5V, V_{CM} = 0.5$	85	95		dB
CMVR	Input Common-Mode Voltage Range	CMRR $\geq 50$ dB	0		2	V
$A_{VOL}$	Large Signal Voltage Gain	$0.5 \leq V_O \leq 2.5, R_L = 2 k\Omega$ $0.5 \leq V_O \leq 2.5, R_L = 10 k\Omega$		83 93		dB
$V_O$	Output Swing High	$R_L = 2 k\Omega$ to $V^+/2$		50		mV from rail
		$R_L = 10 k\Omega$ to $V^+/2$		30		
	Output Swing Low	$R_L = 2 k\Omega$ to $V^+/2$		50		
		$R_L = 10 k\Omega$ to $V^+/2$		30		
$I_{SC}$	Output Short Circuit Current	Sourcing to $V^+/2$ $V_{IN}$ Differential = 100 mV (Note 8)	14	17		mA
		Sinking from $V^+/2$ $V_{IN}$ Differential = -100 mV (Note 8)	50	53		
$I_S$	Supply Current per Amplifier			110	125	$\mu A$
SR	Slew Rate	$A_V = +1$ , 10% to 90% (Note 7)		2.8		V/ $\mu s$
GBW	Gain Bandwidth Product			12		MHz
$e_n$	Input-Referred Voltage Noise	$f = 100$ kHz		17		nV/ $\sqrt{Hz}$
		$f = 1$ kHz		17		
$i_n$	Input-Referred Current Noise	$f = 100$ kHz		0.15		pA/ $\sqrt{Hz}$
		$f = 1$ kHz		0.1		
THD	Total Harmonic Distortion	$f = 1$ kHz, $A_V = 2, R_L = 600\Omega$		0.003		%

## 5V DC Electrical Characteristics

Unless otherwise specified, all limits are guaranteed for  $T_J = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_O = V_{CM} = V^+/2$ , and  $R_L > 1\text{ M}\Omega$ . **Bold-face** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Min (Note 5)	Typ (Note 4)	Max (Note 5)	Units
$V_{OS}$	Input Offset Voltage			-0.1	$\pm 1$	mV
$I_B$	Input Bias Current	(Note 6)		80		nA
$I_{OS}$	Input Offset Current			2.2		nA
CMRR	Common Mode Rejection Ratio	$V_{CM}$ Step from 0V to 3.5V	90	100		dB
PSRR	Power Supply Rejection Ratio	$V^+ = 3\text{V to } 5\text{V}$ , $V_O = 1.5\text{V}$ , $V_{CM} = 0.5\text{V}$	85	95		dB
CMVR	Input Common-Mode Voltage Range	CMRR $\geq 50$ dB	0		4	V
$A_{VOL}$	Large Signal Voltage Gain	$V_O = 0.5\text{V to } 4.5\text{V}$ , $R_L = 2\text{ k}\Omega$		83		dB
		$V_O = 0.5\text{V to } 4.5\text{V}$ , $R_L = 10\text{ k}\Omega$		93		
$V_O$	Output Swing High	$R_L = 2\text{ k}\Omega$ to $V^+/2$		50		mV from rail
		$R_L = 10\text{ k}\Omega$ to $V^+/2$		30		
	Output Swing Low	$R_L = 2\text{ k}\Omega$ to $V^+/2$		50		
		$R_L = 10\text{ k}\Omega$ to $V^+/2$		30		
$I_{SC}$	Output Short Circuit Current	Sourcing to $V^+/2$ $V_{IN}$ Differential = 100 mV (Note 8)	15	18.5		mA
		Sinking from $V^+/2$ $V_{IN}$ Differential = -100 mV (Note 8)	50	52		
$I_S$	Supply Current per Amplifier			110	125	$\mu\text{A}$
SR	Slew Rate	$A_V = +1$ , $V_O = 1 V_{PP}$ 10% to 90% (Note 7)		2.8		V/ $\mu\text{s}$
GBW	Gain Bandwidth Product			12		MHz
$e_n$	Input-Referred Voltage Noise	$f = 100\text{ kHz}$		17		nV/ $\sqrt{\text{Hz}}$
		$f = 1\text{ kHz}$		17		
$i_n$	Input-Referred Current Noise	$f = 100\text{ kHz}$		0.1		pA/ $\sqrt{\text{Hz}}$
		$f = 1\text{ kHz}$		0.15		
THD	Total Harmonic Distortion	$f = 1\text{ kHz}$ , $A_V = 2$ , $R_L = 600\ \Omega$		0.003		%

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the Electrical Characteristics Tables.

**Note 2:** Human body model: 1.5 k $\Omega$  in series with 100 pF. Machine Model: 0 $\Omega$  in series with 200 pF

**Note 3:** The maximum power dissipation is a function of  $T_{J(MAX)}$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any ambient temperature is  $P_D = (T_{J(MAX)} - T_A) / \theta_{JA}$ . All numbers apply for packages soldered directly onto a PC board.

**Note 4:** Typical values represent the most likely parametric norm at the time of characterization.


**Note 5:** Limits are 100% production tested at 25°C. Limits over the operating temperature range are guaranteed through correlations using Statistical Quality Control (SQC) method.

**Note 6:** Positive current corresponds to current flowing into the device.

**Note 7:** Slew rate is the average of the rising and falling slew rates.

**Note 8:** Short circuit test is a momentary test.


## Connection Diagram



## Ordering Information

Package	Part Number	Package marking	Transport Media	NSC Drawing
5-Pin SC70	LMV651MG	A93	1k Units Tape and Reel	MA005A
	LMV651MGX		3 k Units Tape and Reel	

**Physical Dimensions** inches (millimeters) unless otherwise noted

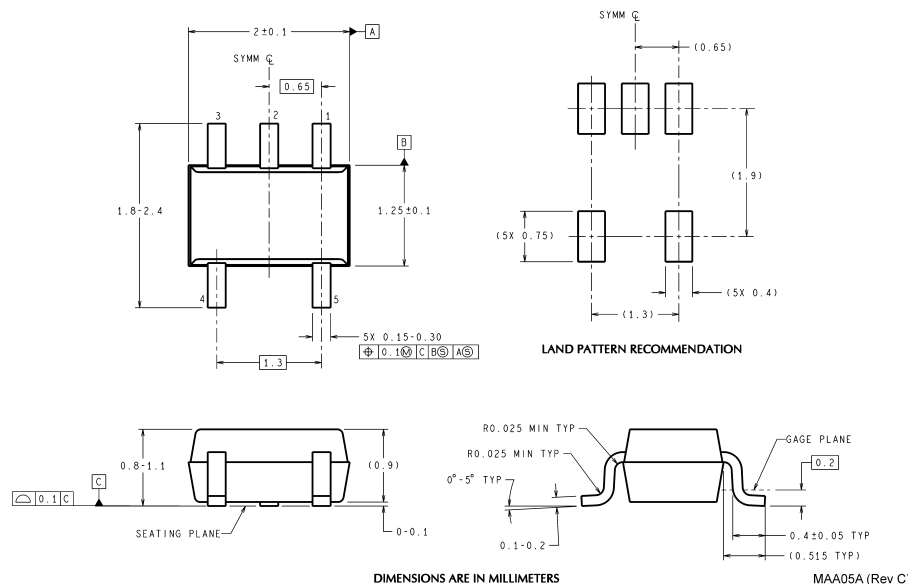

**5-Pin SC70**  
**NS Package Number MAA05A**

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at [www.national.com](http://www.national.com).

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**BANNED SUBSTANCE COMPLIANCE**

National Semiconductor manufactures products and uses packing materials that meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no "Banned Substances" as defined in CSP-9-111S2.

Leadfree products are RoHS compliant.



**National Semiconductor**  
**Americas Customer**  
**Support Center**  
Email: [new.feedback@nsc.com](mailto:new.feedback@nsc.com)  
Tel: 1-800-272-9959

**National Semiconductor**  
**Europe Customer Support Center**  
Fax: +49 (0) 180-530 85 86  
Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)  
Deutsch Tel: +49 (0) 69 9508 6208  
English Tel: +44 (0) 870 24 0 2171  
Français Tel: +33 (0) 1 41 91 8790

**National Semiconductor**  
**Asia Pacific Customer**  
**Support Center**  
Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor**  
**Japan Customer Support Center**  
Fax: 81-3-5639-7507  
Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)  
Tel: 81-3-5639-7560