



查询LSM535供应商

捷多邦，专业PCB打样工厂，24小时加急出货

5 Amp Schottky Rectifier LSM535 — LSM545

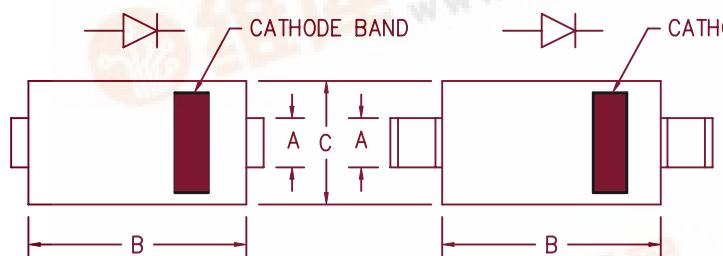

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.117	.123	2.97	3.12	
B	.260	.280	6.60	7.11	
C	.220	.245	5.59	6.22	
D	.307	.322	7.80	8.18	
E	.075	.095	1.91	2.41	
F	.380	.400	9.65	10.16	
G	.025	.040	.640	1.02	
H	.030	.060	.760	1.52	

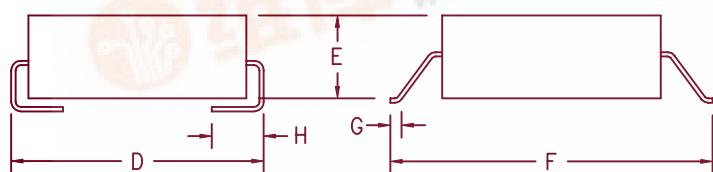

Microsemi
Catalog Number

Working Peak
Reverse Voltage Repetitive Peak
Reverse Voltage

LSM535*
LSM540*
LSM545*

35V
40V
45V

- Schottky Barrier Rectifier
- Guard Ring for Reverse Protection
- Low power loss, High efficiency
- $\sqrt{V_{RRM}}$ 35 to 45 Volts
- Reverse Energy Tested

* Add Suffix J for J Lead or G for Gull Wing Lead Configuration

Electrical Characteristics

Average forward current
Maximum surge current
Max peak forward voltage
Max peak forward voltage
Max peak reverse current
Max peak reverse current
Typical junction capacitance

I_{F(AV)} 5 Amps
I_{FSM} 250 Amps
V_{FM} .42 Volts
V_{FM} .52 Volts
I_{RM} 500 mA
I_{RM} 2 mA
C_J 380 pF

Square wave
8.3ms, half sine, T_J = 150°C
I_{FM} = 5A; T_J = 150°C*
I_{FM} = 5A; T_J = 25°C*
V_{RRM}, T_J = 125°C*
V_{RRM}, T_J = 25°C
V_R = 5.0V, T_J = 25°C

*Pulse test: Pulse width 300 μ sec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temperature range
Operating junction temp range
Maximum thermal resistance
Weight

T_{STG}
T_J
R_{θJL}

-55°C to 175°C
-55°C to 150°C
22°C Junction to lead
.008 ounces (.22 grams) typical

LSM535 – LSM545

Figure 1
Typical Forward Characteristics

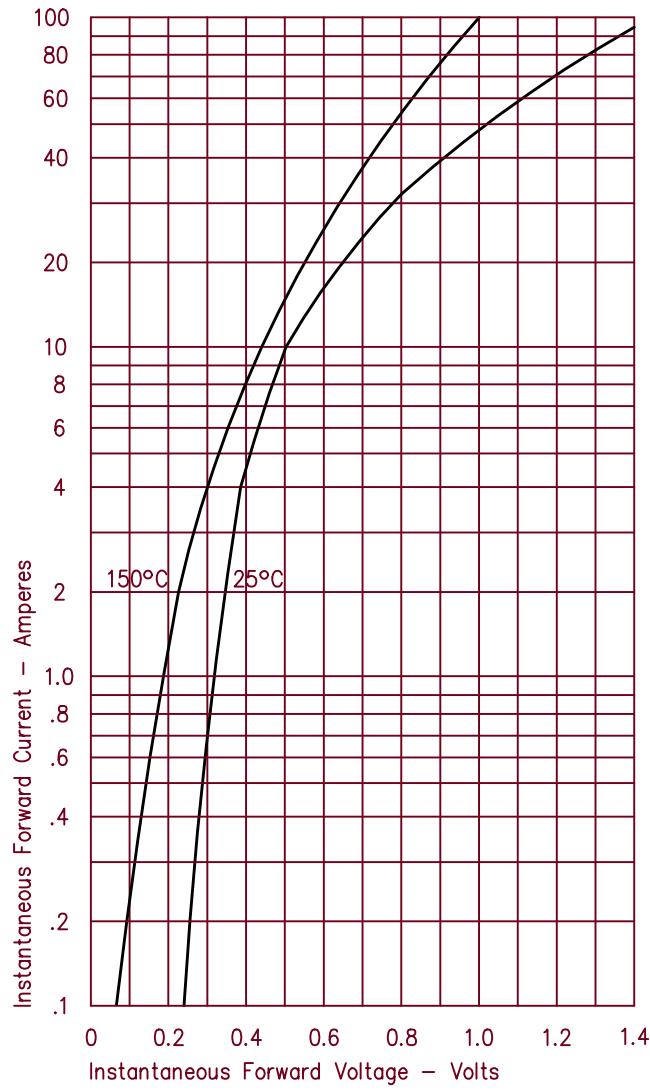


Figure 3
Typical Junction Capacitance

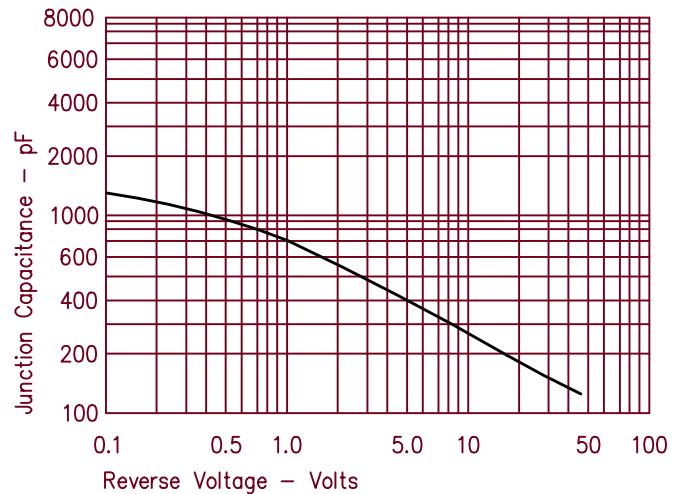


Figure 2
Typical Reverse Characteristics

