

Acer Laboratories Inc.

M6759: 8 bit MTP Micro-controller

--Proprietary, Confidential, Preliminary-- Product Brief

M6759 : 8 Bit MTP Micro-controller

Features

- 8051 instruction set compatible 8 bit micro-controller
- 8051/8052 compatible pin out
- Complete static design, wide range of operation frequency from 1 ~ 40 MHz
- Large on-chip memory
 - ◇ 64K bytes build-in Multiple Times Programming ROM (MTP-ROM) program memory
 - ◇ 512 bytes on-chip SRAM, expandable external 64K bytes address space
- Four 8-bit bi-directional I/O ports
- 13 interrupts including 6 external source
- One full-duplex serial UART ports compatible with standard 8052
- Two 16 bit timer/counter
- One 16 bit timer
- On chip oscillator for crystal
- Software power-down mode, support IDLE mode and STOP mode for less power consumption
- ROM Code Protection
- 4.5V~5.5V operation voltage, 12V programming
- 44 pin PLCC or QFP package

General Description

The M6759 is an 8032/8052 instruction compatible 8-bit micro-controller with MTP Flash ROM for firmware updating. By combining a versatile 8-bit CPU with MTP-Flash, this device provides whole micro-controller system on one chip and still remains the feasibility for general control systems in a variety of applications. Further more, the firmware can be protected by user-defined security registers after the code is ready.

ALi M6759 contains the following: a) a non-volatile 64K bytes Multiple Times Programmable ROM program memory. b) a volatile 512 bytes read/write data memory c) four 8-bit I/O ports, two 16-bit timer/event counters (identical to the timers of the 80C51). d) a 16-bit timer (identical to the Timer 2 of the 8052). e) a multi-source two-priority-level nested interrupt structure. f) one serial interface (UART) and g) an on-chip oscillator.




Pin Description


Pin assignments shown below are listed based on 44-pin PLCC package. And if not additionally specified, further pin number reference throughout this document is, by default, referred to 44-pin PLCC package. As for QFP package, the pin number assignment should be shifted accordingly, as shown in Pinout Configuration.

Pin Name	No. (PLCC)	Type	Description
VDD	44	IN	Power supply for internal operation, 5V input.
GND	22	IN	Ground.
P0.7-P0.0	36,37,38,39, 40,41,42, 43	I/O	Port 0 is 8 bits bi-directional I/O port with internal pull high.
AD7-0			Multiplexed address/data bus. During the time when ALE is high, the LSB of a memory address is presented. When ALE falls, the port transitions to a bi-directional data bus. This bus is used to read external ROM and read/write external RAM memory or peripherals.
RST	10	IN	Reset signal of internal circuit, it must be kept 4 clocks to ensure being recognized by internal circuit. This signal will not affect internal SRAM.
XTAL1	21	IN	Crystal In, can be used as external clock input.
XTAL2	20	OUT	Crystal out, feedback of XTAL1.
/PSEN	32	OUT	Program Store Enable Output, commonly connected to external ROM memory as a chip enable during fetching and MOVX operation. /PSEN goes high during a reset condition.
ALE	33	OUT	Address Latch Enable, used to latch external LSB 8 bit address bus from multiplexed address/data bus, commonly connect to the latch enable of 373 family. This signal will be forced high when the device is in a reset condition.
P1.7-P1.0	9,8,7,6,5,4,3, 2	I/O	Port 1 is 8 bits bi-directional I/O port with internal pull high. All pins have an alternate function shown as below.
T2EX (P1.1)		IN	External timer/counter 2 trigger.
T2 (P1.0)		IN	External timer/counter 2.
P2.7-P2.0	31,30,29,28, 27,26,25, 24	I/O	Port 2 is 8 bits bi-directional I/O port with internal pull high. The alternate function is MSB 8 bit address bus
A15-A8		OUT	This bus emits the high-order address byte during fetches from external Program Memory or during accesses to external Data Memory that use 16-bit addresses (MOVX @ DPTR). During accesses to external Data Memory that use 8-bit addresses (MOVX @ Ri), Port 2 emits the contents of the P2 Special Function Register.
P3.7-P3.0	19,18,17,16, 15,14,13, 11	I/O	Port 3 is an 8-bit bi-directional I/O port with internal pull high. The reset condition of this port is with all bits at a logic 1. Port 3 also have alternate function list below
/RD (P3.7)		OUT	External data memory read strobe.
/WR (P3.6)		OUT	External data memory write strobe.
T1 (P3.5)		IN	External timer/counter 1.
T0 (P3.4)		IN	External timer/counter 0.
/INT1 (P3.3)		IN	External interrupt 1 (Negative Edge Detect).
/INT0 (P3.2)		IN	External interrupt 0 (Negative Edge Detect).
TXD (P3.1)		OUT	Serial port output.
RXD (P3.0)		IN	Serial port input.
/EAVPP	35	IN	The pin must be externally held low to enable the device to fetch code from external program memory. If /EAVPP is held high, the device executes from internal program memory. /EAVPP is internal latched on reset. This pin also receives the 12V programming voltage (V_{PP}) during FLASH programming.
NC	1,12,23,34	NC	These pins should not be connected for any purpose

Block Diagram

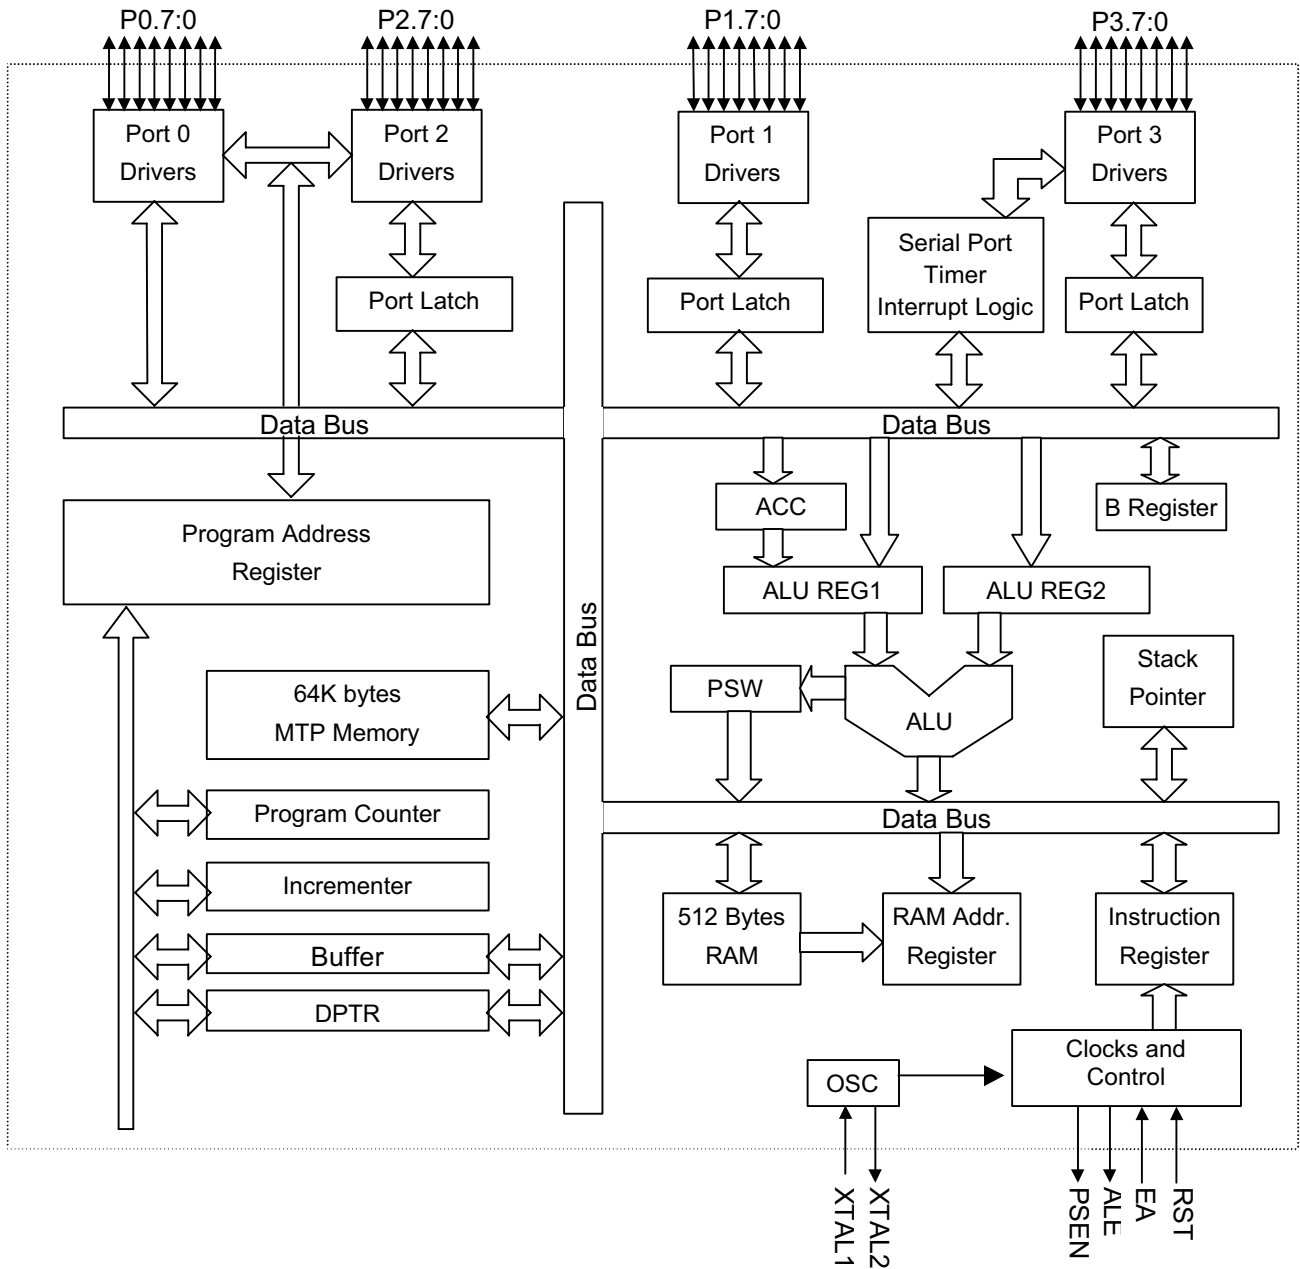


Memory Map

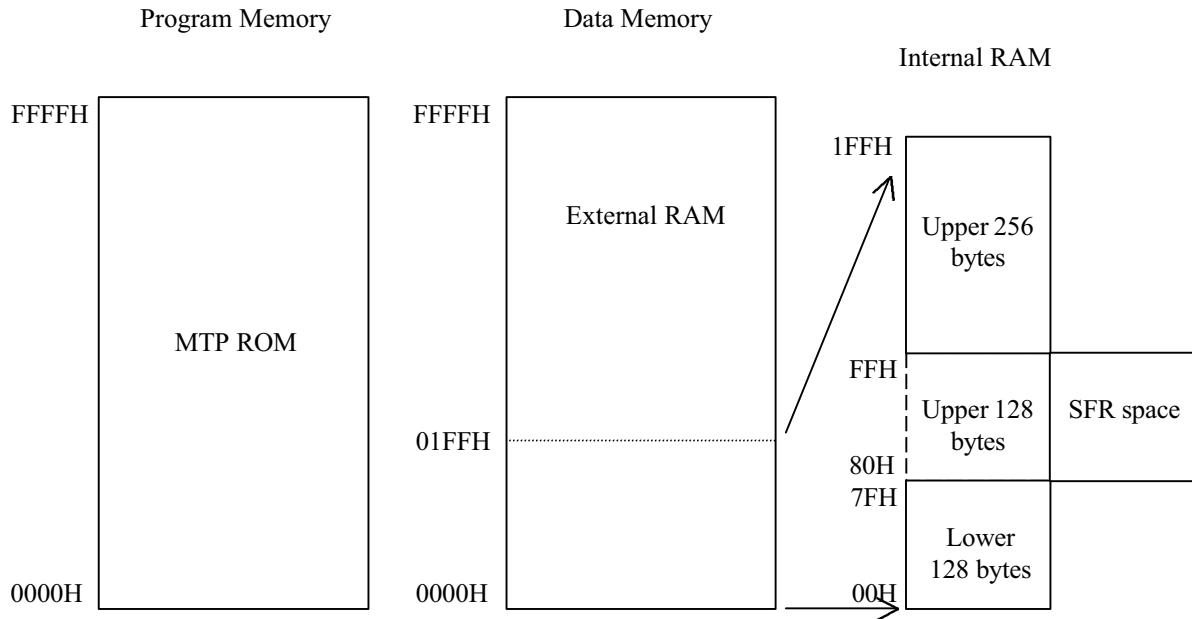


Package Information

44-pin PLCC Package

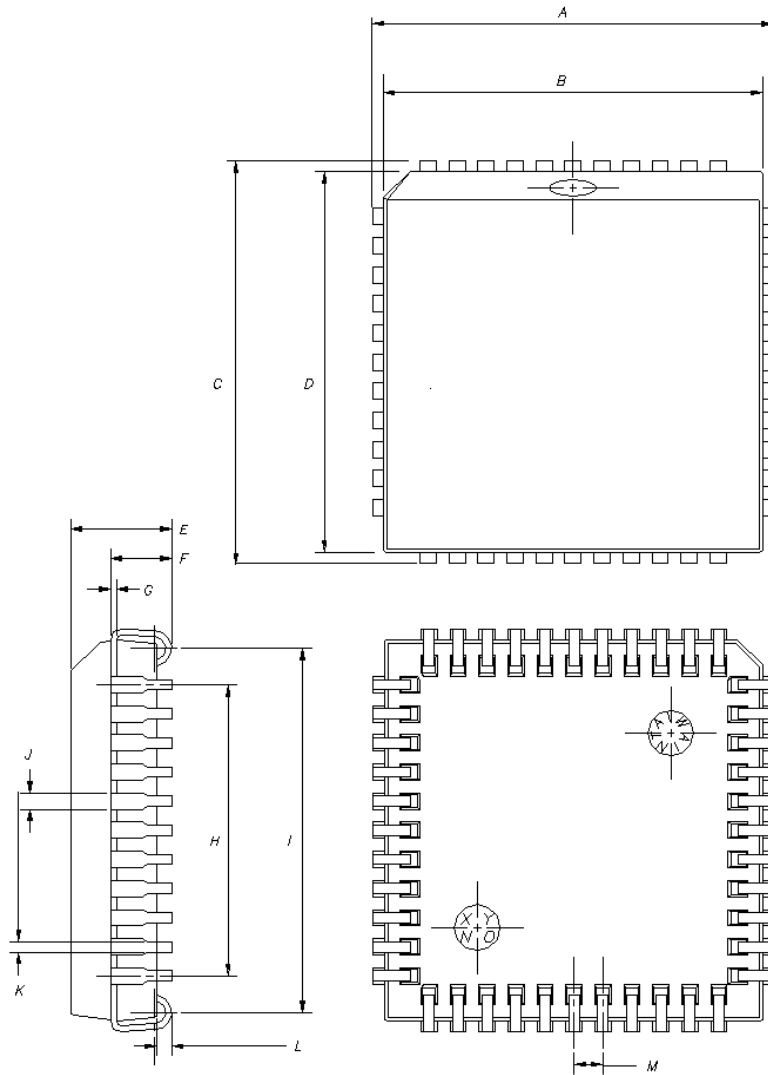


SYMBOL	Dimension in Inches			SYMBOL	Dimension in Inches		
	Min	Typ	Max		Min	Typ	Max
A	0.685	0.690	0.695	H	-	0.5	-
B	0.650	0.653	0.656	I	0.595	0.610	0.625
C	0.685	0.690	0.695	J	0.026	-	0.032
D	0.650	0.653	0.656	K	0.013	-	0.021
E	0.168	0.174	0.180	L	0.02	-	0.04
F	0.102	0.105	0.108	M	0.045	0.05	0.055
G	-	0.010	-				

44-pin QFP Package

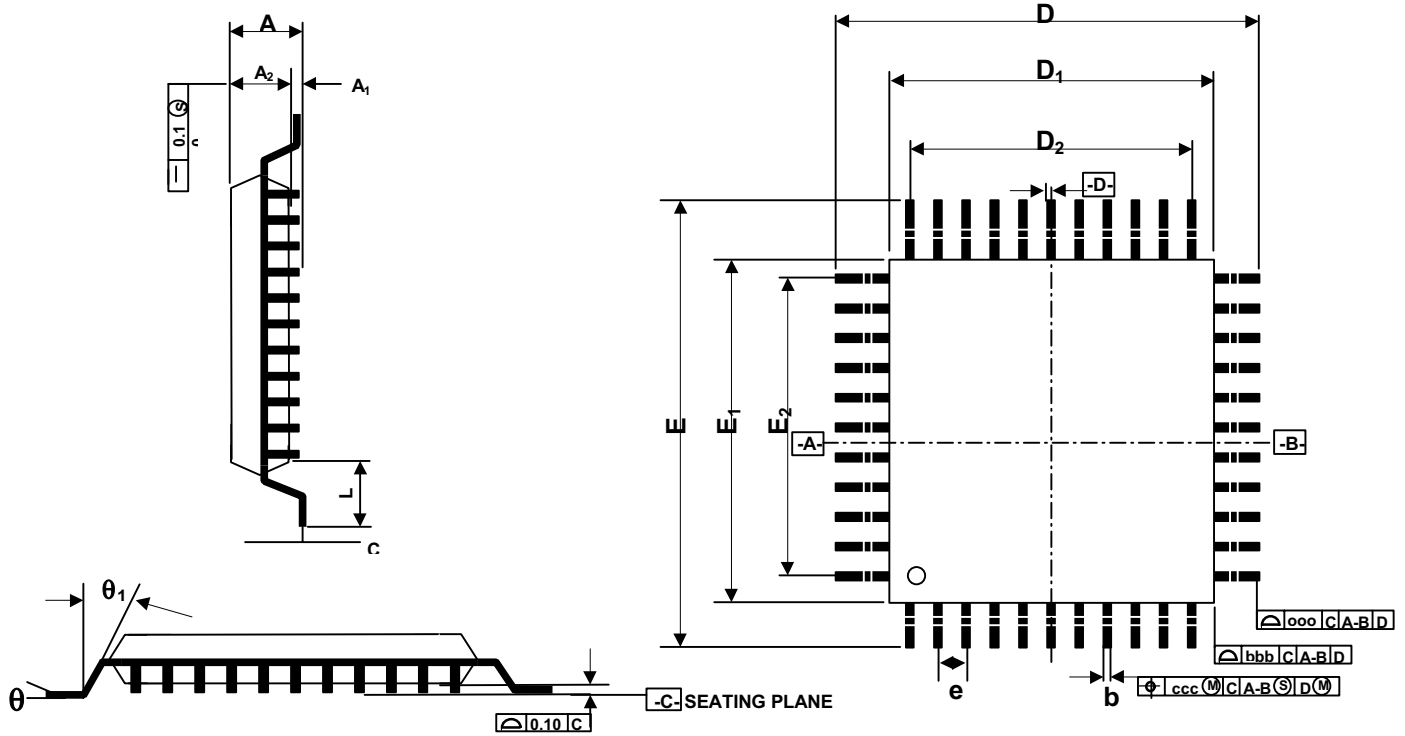

CONTROL DIMENSIONS ARE IN MILLIMETERS

Symbol	Millimeter			Inch		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	-	-	2.55	-	-	0.100
A ₁	0.15	0.25	0.35	0.006	0.010	0.014
A ₂	1.90	2.05	2.20	0.075	0.081	0.087
D	13.20 BASIC			0.520 BASIC		
D ₁	10.00 BASIC			0.394 BASIC		
E	13.20 BASIC			0.520 BASIC		
E ₁	10.00 BASIC			0.394 BASIC		
R ₂	0.13	-	0.30	0.005	-	0.012
R ₁	0.13	-	-	0.005	-	-
θ	0°	-	7°	0°	-	7°
θ ₁	0°	-	-	0°	-	-
θ ₂	10° REF			10° REF		
θ ₃	7° REF			7° REF		
c	0.10	0.15	0.23	0.004	0.006	0.009
L	0.73	0.88	1.03	0.029	0.035	0.041
L ₁	1.80			0.063		
c	0.10	0.15	0.23	0.004	0.006	0.009
L	0.73	0.88	1.03	0.029	0.035	0.041
L ₁	1.80			0.063		
S	0.20	-	-	0.008	-	-

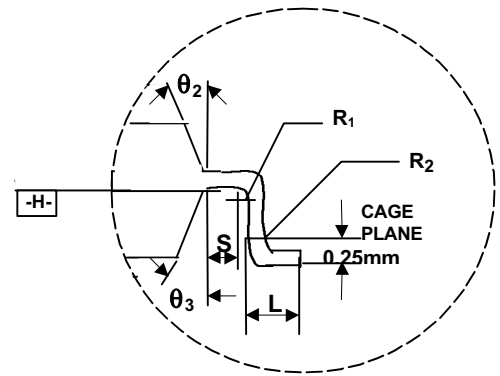

Symbol	Millimeter			Inch		
	Min.	Nom.	Max.	Min.	Nom.	Max.
b	0.30	0.35	0.45	0.012	0.014	0.018
e	0.80 BSC			0.031 BSC		
D ₂	8.0			0.315		
E ₂	8.0			0.315		
ooo	0.25			0.010		
bbb	0.20			0.008		
ccc	-	0.20	-	-	0.008	-

NOTES : 1, DIMENSION D1 AND E1 DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25mm PER SIDE DIMENSIONS D1 AND E1 DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE (-H-). 2, DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08mm TOTAL. IN EXCESS OF THE b DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE LEAD FOOT.

--Proprietary, Confidential, Preliminary--
Product Brief

Acer Laboratories Inc.

M6759: 8 bit MTP Micro-controller

Worldwide Distributors and Sales Offices :

Taiwan

Acer Laboratories Inc.

11F, No. 45 Tung Hsing Road,
Taipei 110, Taiwan, R.O.C.
Tel: 886 (2) 762 -8800
Fax: 886 (2) 762 -6060

Acer Sertek

11-15F, 135, Sec. 2
Chien Kuo North Road,
Taipei 10479, Taiwan, R.O.C.
Tel: 886 (2) 501-0055
Fax: 886 (2) 501- 2521

Arrow / Ally, Inc.

11F, 678, Sec. 4,
Pa Teh Road,
Taipei, Taiwan, R.O.C.
Tel: 886 (2) 768 - 6399
Fax: 886 (2) 768 - 6390

Asec International Inc.

4F, 223 Chung Yang Road,
Nan Kang, Taipei,
Taiwan, R.O.C.
Tel: 886 (2) 786-6677
Fax: 886 (2) 786 - 5257

Hong Kong

Lestina International Ltd.

14/F, Park Tower 15
Austin Road, Tsimshatsui,
Hong Kong
Tel: 852-2735 -1736
Fax: 852-2730 - 5260

Texny Glorytact (HK) Ltd.

Unit M, 6/F, Kaiser Estate
Phase 3, 11 Hok Yuen
Street, Hung Hom,
Kowloon, Hong Kong
Tel: 852 - 2765 - 0118
Fax: 852 - 2765 - 0557

Japan

ASCII Corporation

8-1, Inarimae, Tsukuba-shi Ibaraki,
305, Japan
Tel: 81 - 298 - 55 - 4004
Fax: 81 - 298 - 55 - 1985

Kanematsu Electronic Components Corp.

11F Shin-Ohsaki Kangyo Bldg.,
6-4, Ohsaki 1-Chome,
Shinagawa-Ku, Tokyo, Japan 141
Tel: 81 (3) 3779 - 7850
Fax: 81 (3) 3779 - 7898

Macnica Inc.

Hakusan High-Tech Park, 1-22-2 Hakusan,
Midori-Ku, Yokohama City, Japan 226
Tel: 81 (45) 939 - 6116
Fax: 81 (45) 939 - 6117

Technova Inc.

9F Daiichi-Seimei Daini Bldg.,
2-14-27, Shin-Yokohama,
Kouhoku-ku, Yokohama-Shi, Kanagawa, 222
Tel: 81 (45) 472-7800
Fax: 81 (45) 472-7830

Korea

I&C Microsystems Co., Ltd.

801, 8/F, Bethel Bldg.,
324-1, Yangjae-Dong, Seocho-Ku,
Seoul, Korea
Tel: 82 (2) 577 - 9131
Fax: 82 (2) 577 - 9130

Singapore

Electronic Resources Ltd.

205 Kallang Bahru, # 04-00,
Singapore 339341
Tel: 65 - 298 - 0888
Fax: 65 - 298 - 1111

ALi U. S. Office

1830-B Bering Drive
San Jose, CA 95112 USA
Tel: 1 (408) 467 - 7456
Fax: 1 (408) 467 - 7474