


查询M85C供应商



捷多邦，专业PCB打样工厂，24小时加急出货

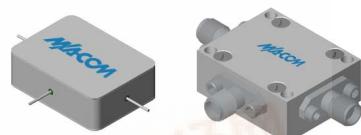

Characteristics	Typical	Guaranteed	
		+25°C	-54° to +85°C
SSB Conversion Loss & SSB Noise Figure (max.)			
$f_R =$ $f_L =$ $f_I =$			
$f_R =$ $f_L =$ $f_I =$			
$f_R =$ $f_L =$ $f_I =$			
$f_R =$ $f_L =$ $f_I =$			
Isolation (min.)			
L to R			
$f_L =$			
$f_L =$			
$f_L =$			
L to I			
$f_L =$			
$f_L =$			
$f_L =$			
R to I			
$f_R =$			
$f_R =$			
1 dB Conversion Compression			
$f_L @$			
$f_L @$			
Input IP3			
$f_{R1} =$ $f_{R2} =$			
$f_L =$			
$f_{R1} =$ $f_{R2} =$			
$f_L =$			
$f_{R1} =$ $f_{R2} =$			
$f_L =$			

### Absolute Maximum Ratings

Operating Temperature  
Storage Temperature  
Peak Input Power  
Peak Input Current

### Outline Drawing(s)

Package	Figure	Model

Typical Performance at 25°C