

MA3062W

Silicon planer type

Constant voltage, constant current, waveform clipper and surge absorption circuit

■ Features

- Mini type package (4-pin)
- Two-element wiring in parallel of MA3062

■ Absolute Maximum Ratings (Ta= 25°C)

Parameter	Symbol	Rating	Unit
Average forward current	Single	$I_{F(AV)}$	100
	Double	$I_{F(AV)}$	75
Instantious forward current	Single	I_{FRM}	200
	Double	I_{FRM}	150
Total power dissipation	Single	P_{tot}^{*1}	200
	Double	P_{tot}^{*1}	150
Non-repetitive reverse surge power dissipation		P_{ZSM}^{*2}	15
Junction temperature	T_j	125	°C
Storage temperature	T_{stg}	- 55 to + 125	°C

*1 With a printed-circuit board

*2 $t=100\mu s$, $T_j=150^\circ C$

■ Electrical Characteristics (Ta= 25°C)*1

Parameter	Symbol	Condition	min	typ	max	Unit
Forward voltage	V_F	$I_F=10mA$		0.8	0.9	V
Zener voltage	V_Z^{*2}	$I_Z=5mA$	5.8	6.2	6.6	V
Operating resistance	R_Z	$I_Z=5mA$		6	20	Ω
Reverse current	I_R	$V_R=4V$			3	μA
Temperature coefficient of zener voltage	S_Z^{*3}	$I_Z=5mA$	0.4	2.3	3.7	mV/°C
Terminal capacitance	C_D	$V_R=0V$, $f=1MHz$		90	130	pF


Note 1. Rated input/output frequency : 5MHz

2. *1 : The V_Z value is for the temperature of 25°C. In other cases, carry out the temperature compensation.


*2 : Guaranteed at 20ms after power application

*3 : $T_j=25$ to $125^\circ C$

■ Marking

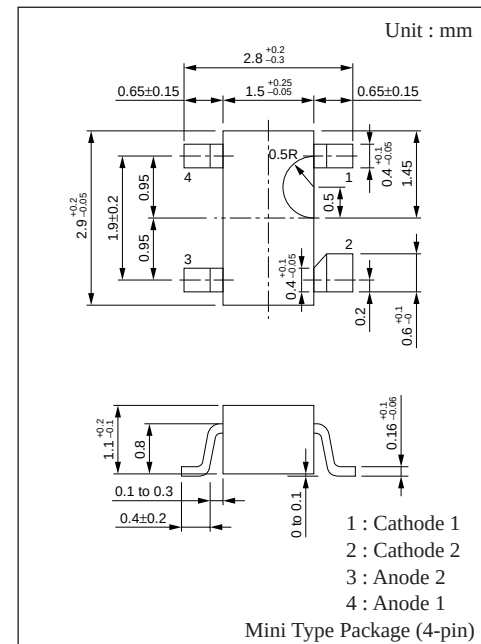

■ Internal Connection

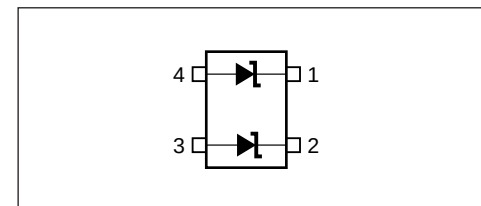

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com