

MA3130WA

Silicon planer type

Constant voltage, constant current, waveform clipper and surge absorption circuit

■ Features

- Mini type package (3-pin)
- Two anode-common wiring of MA3130

■ Absolute Maximum Ratings (Ta= 25°C)

Parameter	Symbol	Rating	Unit
Average forward current	$I_{F(AV)}$	100 *1	mA
Instantaneous forward current	I_{FRM}	200 *1	mA
Total power dissipation	P_{tot} *2	100 *1	mW
Non-repetitive reverse surge power dissipation	P_{ZSM} *3	15	W
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	- 55 to + 150	°C

*1 Working value in a single piece

*2 With a printed-circuit board

*3 $t=100\mu s, T_j=150^\circ C$

■ Electrical Characteristics (Ta= 25°C)*1

Parameter	Symbol	Condition	min	typ	max	Unit
Forward voltage	V_F	$I_F=10mA$		0.8	0.9	V
Zener voltage	V_Z *2	$I_Z= 5mA$	12.40		14.10	V
Operating resistance	R_{ZK}	$I_Z= 0.5mA$			170	Ω
	R_Z	$I_Z= 5mA$			30	Ω
Reverse current	I_{R1}	$V_R= 9.0V$			0.1	μA
	I_{R2}	$V_R= 11.9V$			60	μA
Temperature coefficient of zener voltage	S_Z *3	$I_Z= 5mA$	7.0	9.4	11.0	$mV/^\circ C$


Note 1. Rated input/output frequency : 5MHz

2. *1 : The V_Z value is for the temperature of 25°C. In other cases, carry out the temperature compensation.



*2 : Guaranteed at 20ms after power application

*3 : $T_j= 25$ to $150^\circ C$

■ Marking

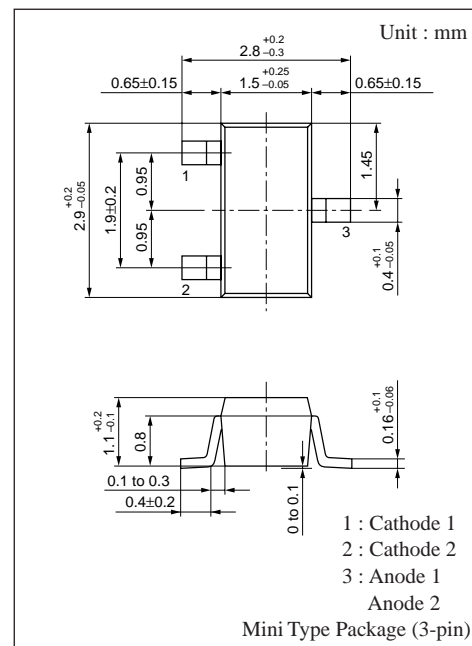

■ Internal Connection

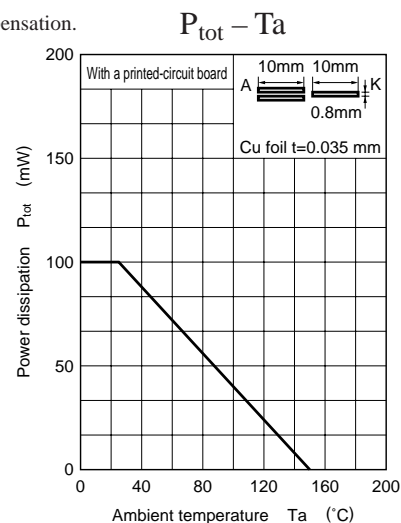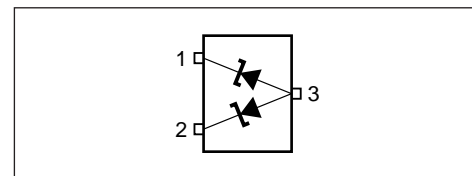

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com